

SPECIFICATIONS


160NW-300A CC DRIVER

Model: 160NW-300A

Power: 160W

Rev.: V00

Release date: 2026-09-02

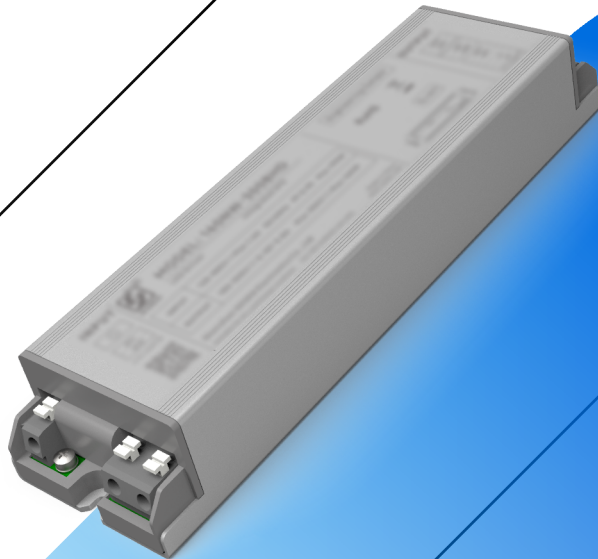

160NW-300A LED Driver

Features

- Efficiency up to 95%
- Isolated dimming: 0-10V, PWM, Resistor
- Optional aux: 12V/0.2A
- Time-controlled programmable
- Protections: OTP/IUVP
- Wide output voltage range
- Wide input voltage
- NTC, Optical, Dial Power Range Programmable
- Surge protection: ANSI CM: 6kV,DM: 6kV
- Long lifetime
- Warranty: 5 years



RoHS



Description

160NW-300A are 160W non-isolated constant current LED Driver with 108-528VAC. It has DIM to Off, high efficiency, isolated auxiliary power supply, compact housing, fully potted, high reliability, high cost performance and other advantages.

Applications:

Shoebox Light, Linear high bay light, Flood lighting, Wall lamp

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Recommended Voltage	Iout	Default Current	THD (Typ.)	PF (Typ.)	Eff. (Typ.)	Tc (Max.)
160NW-300A	108-528Vac	160W	180-300V	200V-300V	0.187-0.8A	0.53A	10%	0.97	95%	90°C

Note:

1.Default Tested: at 277Vac, full load, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range,it is need to test the performance with the LED module.

160NW-300A LED Driver

“A” Means Additional Function

"A"	AUX 12V	Dimming off 0-10V/PWM/Resistor	adjust power (Single DIP)	Photosensitive control	NTC	Remark
A	✓	✓	✓	✓	✓	

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	120Vac		480Vac	Ta≤50℃
AC Input Range	108Vac		528Vac	Reference derating curve
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			1.6A	120Vac, Full load
Max Input Power			190W	120Vac, Full load
Max Inrush Current(120Vac)			40A	Cold start
Max Inrush Current(277Vac)			100A	Cold start
Max Inrush Current(480Vac)			160A	Cold start
Standby Power			1.0W	480Vac/60Hz, Dim-to-off
Power Factor	0.95	0.97		277Vac, Full load
	0.90			120-480Vac, 70-100% load
THD		8%	10%	277Vac, Full load
			20%	120-480Vac, 70-100% load

160NW-300A LED Driver

Output Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	180V		300V	Power derated @180-200V
Rated O/P Voltage	200V		300V	$P_o = V_o \cdot I_o = 160W$, Full load
Rated O/P Current	0.53A		0.8A	0.53A for 300V, 0.8A for 200V
Adj. O/P Current (AOC) Range	0.187A		0.8A	
No Load Voltage			350V	
Efficiency @120Vac	91.0%	92.0%		Output 300V/0.53A
Efficiency @277Vac	94.0%	95.0%		Output 300V/0.53A
Efficiency @480Vac	93.5%	94.5%		Output 300V/0.53A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			1.0S	120Vac, Full load
			1.0S	480Vac, Full load
Line Regulation	-3.5%		+3.5%	Full load
Load Regulation	-5%		+5%	
OTP	90°C	95°C	100°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.

160NW-300A LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
Aux Power	O/P Voltage	10.8V	12V	13.8V	
	O/P Current			200mA	
0-10V Dimming (Optional)	Dim Vmax	0V		12V	DIM+ source current 110uA.
	Dim Range	10%Iomax		100%Iolet	Dimming prohibits reverse connection
	Rec.Dim Range	0V		10V	
10-0V Dimming (Optional)	Rec.Dim Range	0V		10V	DIM+ Maximum sink current is 40uA Dimming prohibits reverse connection. 5-0V by programming
PWM Dimming (Optional)	PWM High	9.8V		10.2V	DIM+ source current 110uA.
	PWM Low	0V		0.3V	Dimming prohibits reverse connection
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	DIM+ source current 110uA.
	Dim Range	10%Iomax		100%Iolet	
0-10V Dim to Off	Dim off	0.7V	0.8V	0.9V	By DC voltage, PWM, resistance dimming ratio DIM-OFF without afterglow (Optional)
	Dim on	0.8V	0.9V	1.0V	
10-0V Dim to Off	Dim off	9.0V	9.2V	9.4V	
	Dim on	8.8V	9.0V	9.2V	
Dial adjustment	Current range	0.2A		0.8A	Dialing range can be set via PC software
Default light control	Shutdown Voltage	0V	1.0V	1.2V	Default: 5S action; time/voltage on, off can be set by PC software
	Turn-On Voltage	3.2V	3.5V	5.0V	
Timing Curve(Optional)		By programming			Set by program
Lifetime(Tc≤85°C)		≥50,000 hours			80% load
MTBF		200,450 hours			120Vac,Full load, Ta=25°C (MIL-HDBK-217F)
Tc		90°C			
Warranty		5 years			Tc: 85°C
Net Weight		650g			
Dimension		204mm*55mm*34mm			L x W x H

NOTE: All the parameters above are tested Ta 25°C and LED load, unless specified.

160NW-300A LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40℃	25℃	+90℃	
Storage Temperature	-40℃	25℃	+90℃	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL	UL8750	✓	
CUL	CAN/CSA C22.2 No.250.13	✓	

EMI/EMS	Standard	Status	Remark
Conduction Emission	FCC Part 15 Subpart B;ANSI C63.4	✓	ClassB
Radiation Emission	FCC Part 15 Subpart B;ANSI C63.4	✓	ClassB
Harmonic Current Emissions	EN IEC 61000-3-2	✓	ClassC
	GB 17625.1		ClassC
Surge	IEC/EN61000-4-5		DM: 6kV,CM: 6kV,Criterion B
	ANSI/C82.77-5	✓	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12		DM: 6kV,CM: 6kV,Criterion B
	ANSI/C82.77-5	✓	DM: 6kV,CM: 6kV,Criterion B

160NW-300A LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	TUV Insulation Requirements	
Input-Case	2U+1000Vac	/	/	Basic insulation
Input-Dim	2U+1000Vac	/	/	Basic insulation
Dim-Case	500Vac	/	/	Basic insulation
Insulation Resistance	$\geq 10M\Omega$			Input-Dim, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$			25A/1min
Leakage Current	$\leq 0.75mA$			480Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+ and Vaux-)when Hi-pot test.

Performance Curves:

Input Inrush Current

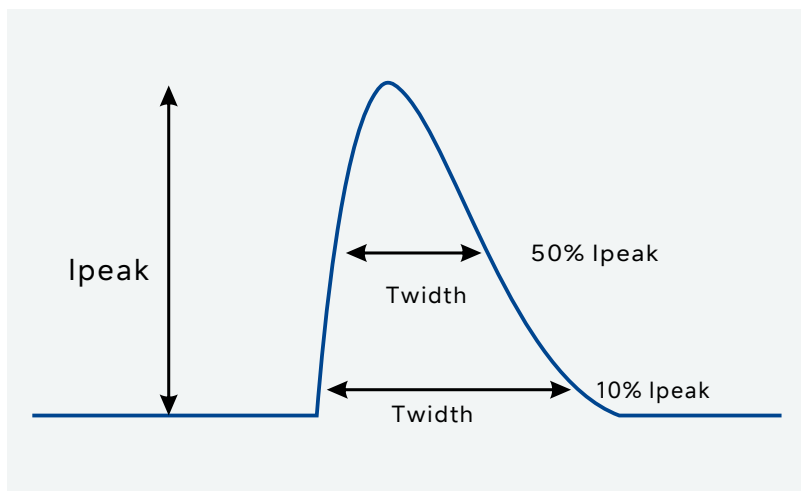


V_{in}	I_{peak}	T(@10% of I_{peak})	T(@50% of I_{peak})
120Vac	40A	350uS	250uS
277Vac	100A	300uS	250uS
480Vac	160A	300uS	200uS

160NW-300A LED Driver


Performance Curves:

Output Voltage Vs. Output Current(Dim/AOC Window)

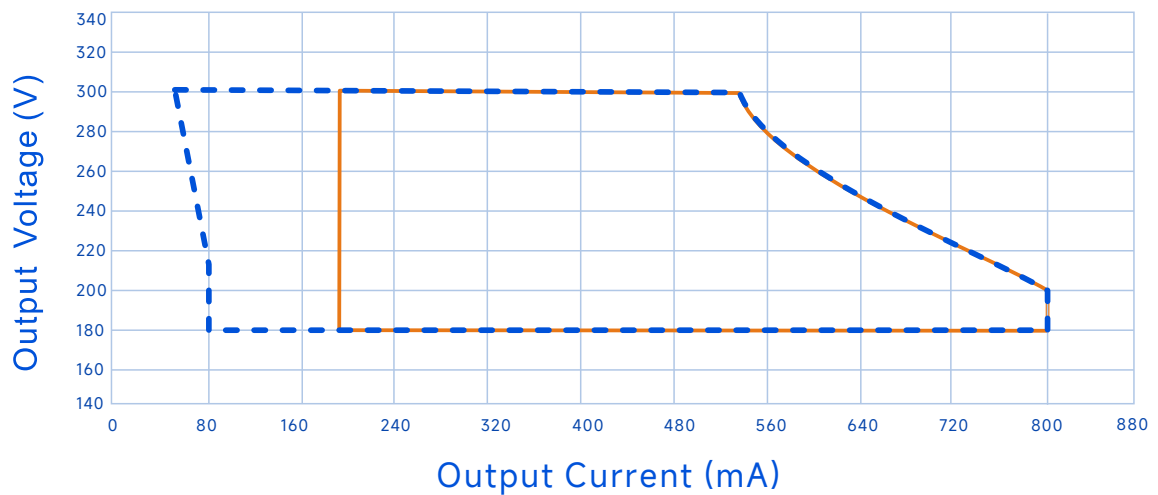

----- Dimming Window — AOC Window

Efficiency Vs. Output Voltage (Vin=120Vac)

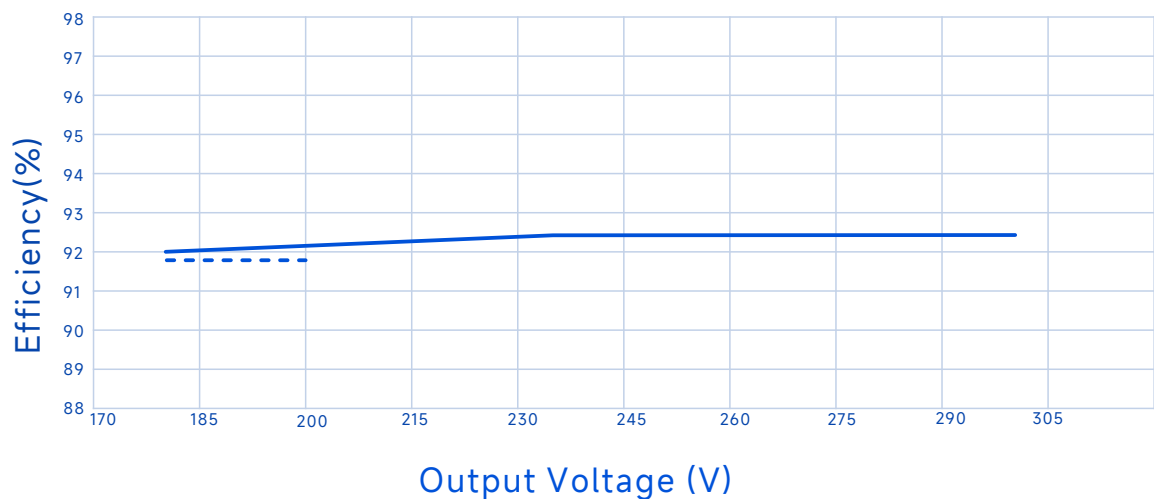


----- Io=800mA

———— Io=530mA


160NW-300A LED Driver

Performance Curves:

Efficiency Vs. Output Voltage (Vin=277Vac)

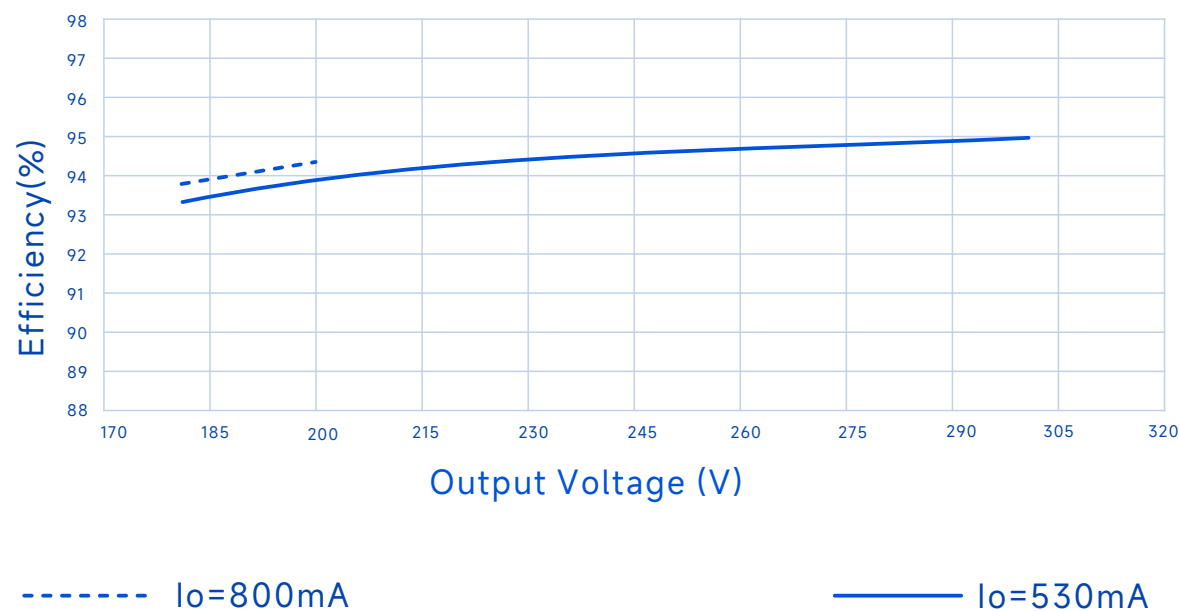


Efficiency Vs. Output Voltage (Vin=480Vac)

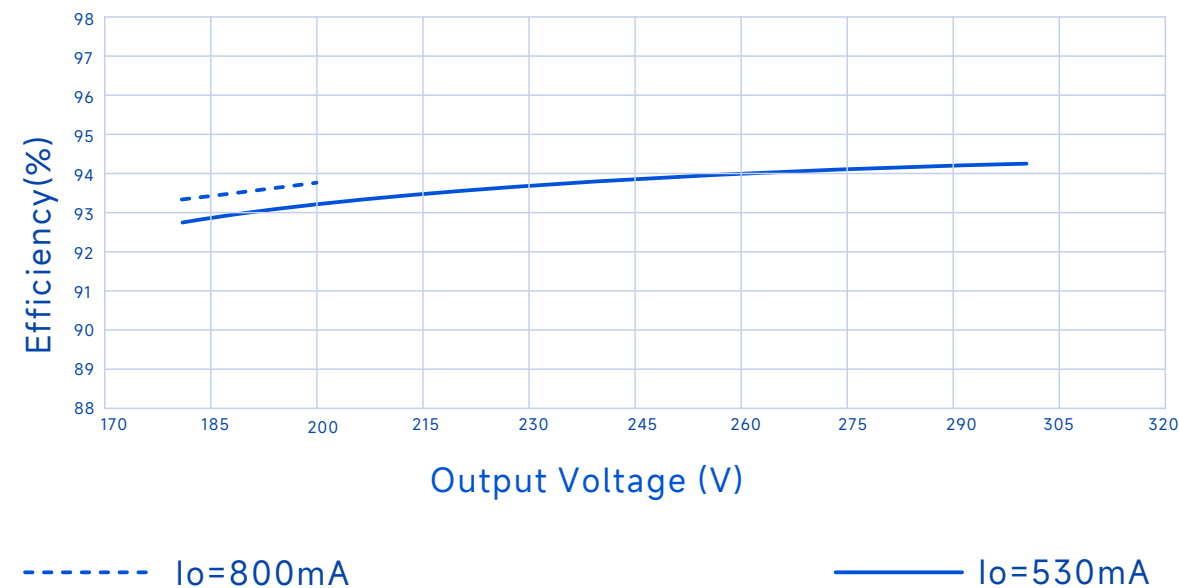


Performance Curves:

Power Factor Vs. Output Power

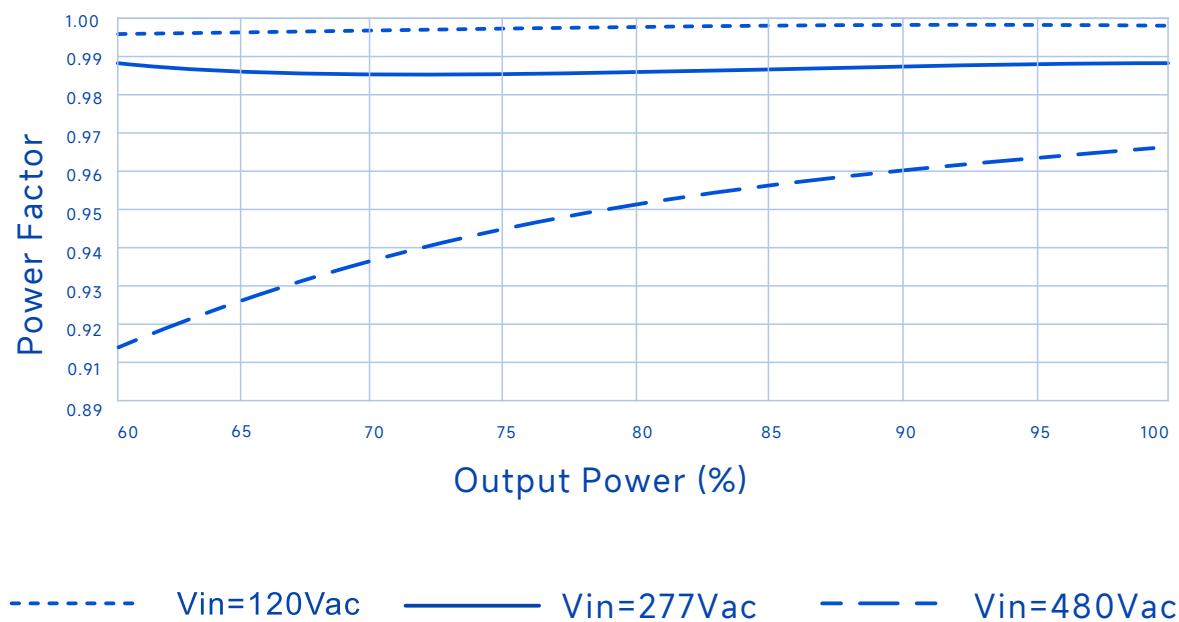


THD Vs. Output Power

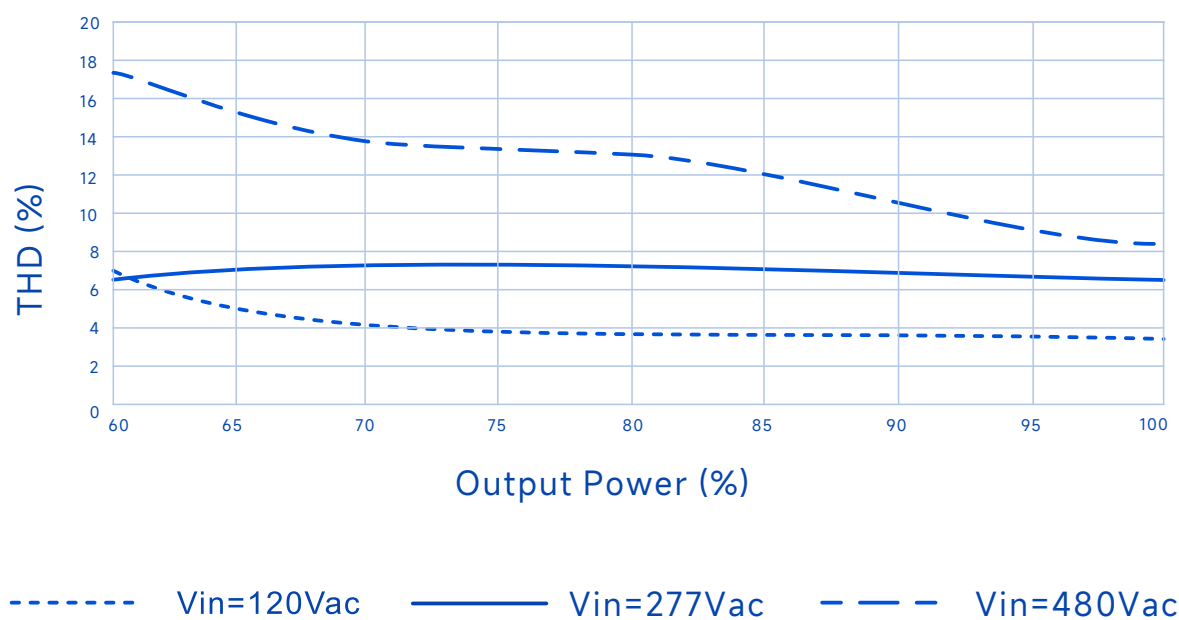


160NW-300A LED Driver

Performance Curves:


Output Power Vs. Input Voltage

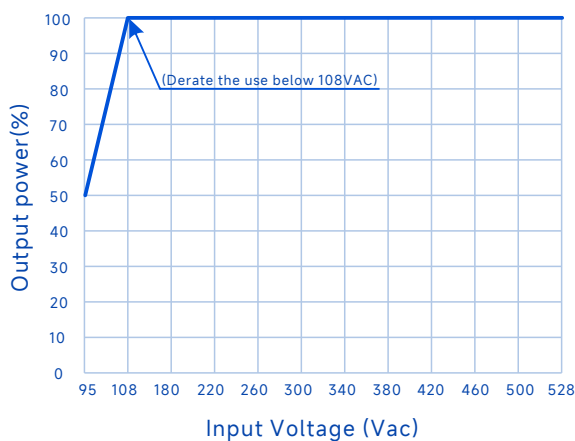


Output Power Vs. Case Temperature

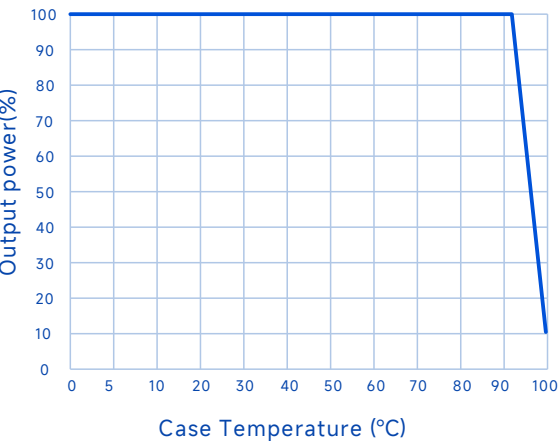

Output Power Vs. Dimming

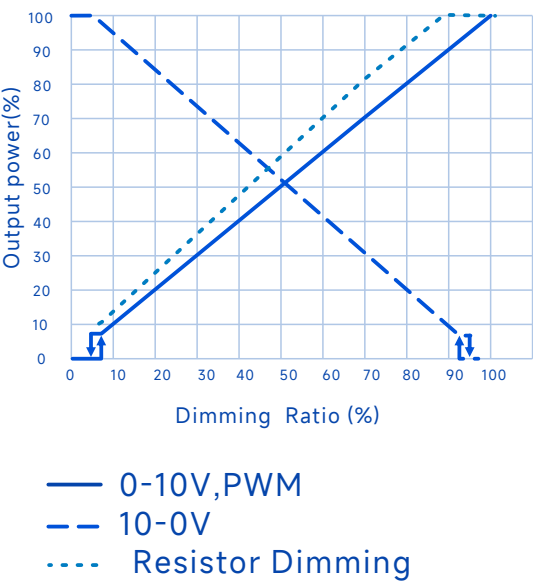

Lifetime Vs. Case Temperature

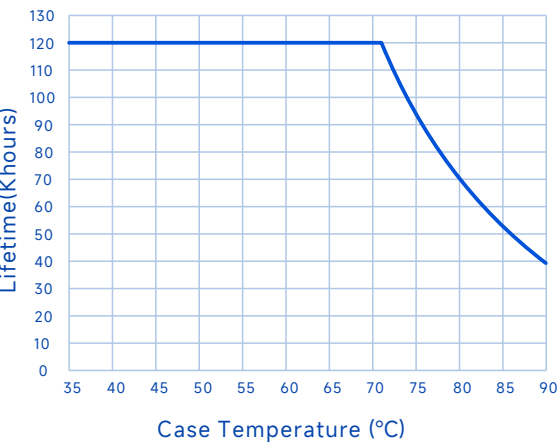


160NW-300A LED Driver

Programming connection diagram

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

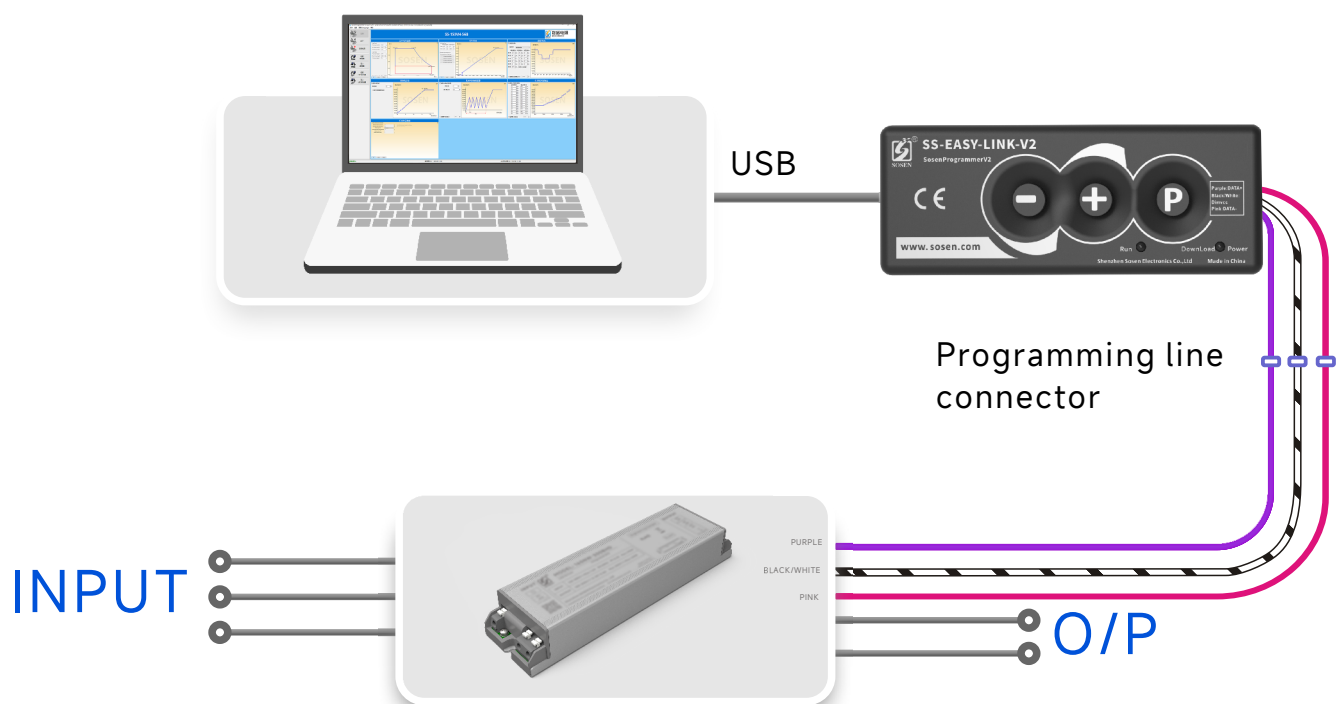

1. During programming, the driver does not need to be powered on to achieve all programming functions.
2. For a driver that is powered on and in use, all programming functions can be performed without needing to disconnect the power.
3. It can operate independently of a PC to achieve offline programming.

Note:

For details, please refer to the Sosen SS-PROG-LINK Programmer Manual.


160NW-300A LED Driver

Parameter			Remark
Default setting	Positive logic dimming (0-10V)	Dimming voltage default 10V (source current)	
	Negative logic dimming (10-0V)	Dimming voltage default 0V (sink current)	
Dimming optional function	Positive logic dimming (0-10V)	Dimming voltage default 0V (sink current) Resistance dimming not available	When the dimming wire is not connected, the LED driver output is in the DIMOFF state
			For parallel dimming applications with multiple LED drivers, it is recommended to use the sink current mode (to be noted in the order)

Note:


Select "Dimming voltage defaults to 10V (source current)" / "Dimming voltage defaults to 0V (sink current)", which needs to be set according to the dimmer used by the end user.

Settings Interface

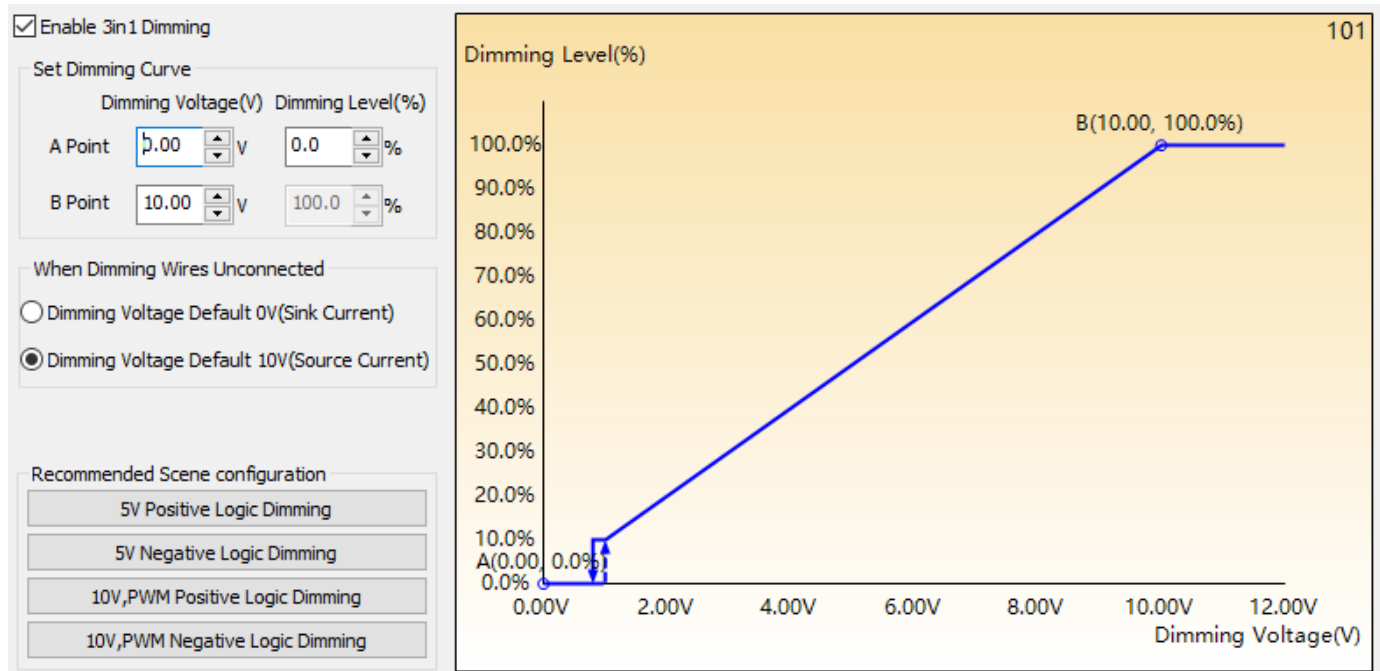

160NW-300A LED Driver

Mechanical Characteristics

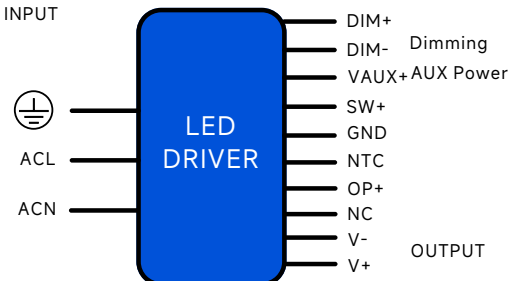

The diagram shows a blue rectangular LED DRIVER component with terminals on both sides. On the left, labeled 'INPUT', are three terminals: a ground symbol, 'ACL', and 'ACN'. On the right, labeled 'OUTPUT', are eight terminals: 'DIM+', 'DIM-' (grouped as 'Dimming'), 'VAUX+' (grouped as 'AUX Power'), 'SW+', 'GND', 'NTC', 'OP+', 'NC', 'V-', and 'V+'.

AC Input Terminal

ACL: connect to L wire, ACN: connect to N wire,
⊕ :connect to earth wire

DC Input Terminal


V+: light source board positive, V-: light source board negative

Function Terminal

DIM+: Dimming Positive, DIM-:Dimming Negative, VAUX+: Auxiliary Source, SW+: Dialing Power, GND: Negative, NTC: LED Over-temperature Protection, OP+: Light Sensing Function

Name Description	Standard Code	mm(In.)
Overall Length	L1	204(8.03)
Mounting Hole Length	L2	196(7.72)
Case Length	L3	173(6.81)
Case Width	W1	55(2.165)
Mounting Hole Width	W2	27.5(1.083)
Case Height	H	34(1.339)
TC Point Position	X	170(6.69)
TC Point Position	Y	16(0.63)

Note
1,Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

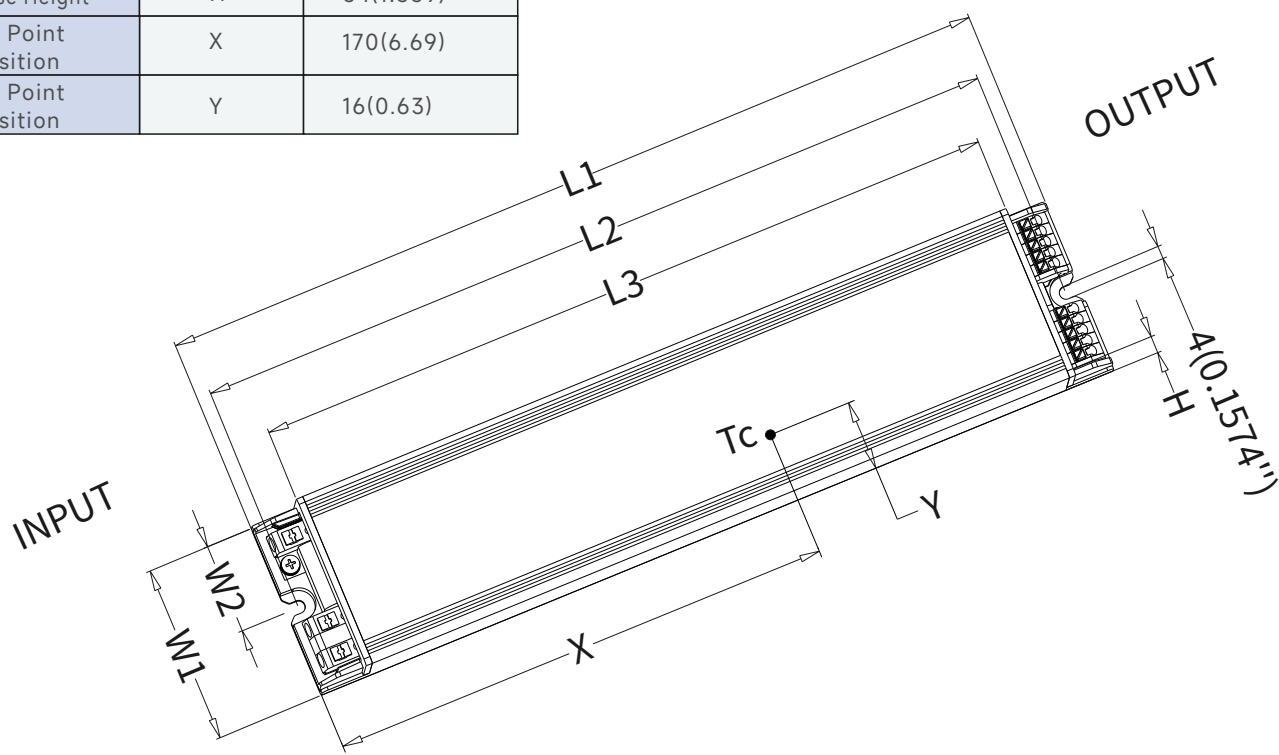

160NW-300A LED Driver



Assembly Tips

- 1.The trace routing on aluminum substrates is designed in compliance with creepage distance requirements specified by relevant certification regulations.
- 2.The creepage distance between LED+ and LED- on the aluminum substrate is designed in compliance with the relevant certification regulations.
3. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
4. It is recommended to design LED beads in parallel first and then in series.
5. The insulation level of LED light panels should meet the reliability design requirements.
6. For other precautions, please refer to the "LED Driver User Manual".
- 7.SOSEN reserves the right of final interpretation of the above parameters.

Warning

Insufficient or compromised insulation voltage resistance in LED light panels may cause breakdown and short circuits to earth, resulting in damage to the luminaire and LED driver, and posing significant safety hazards. It is recommended to install a residual current device (RCD) during application.

Package

- Outside carton dimension: L×W×H =495mm×385mm×162mm;
- 16PCS/Carton;
- Net weight/Piece: 0.65kg;Gross weight/Carton: 11.97kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873-83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2026/09/02	