

SPECIFICATIONS


SS-900NS-V ThinkLink dimming DRIVER

Model: SS-900NS-V500*

Power: 900W

Rev.: V00


Release date: 2026-03-27

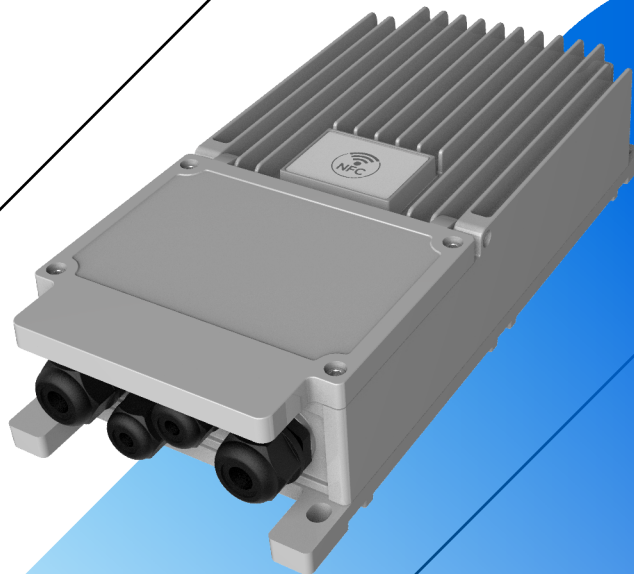

SS-900NS-V Series ThinkLink dimming Driver

Features

- Efficiency up to 97.5%
- Dimming: DALI-2&D4i&DMX/RDM&0-10V&PWM&Resistor
- Dim-to-Off without afterglow
- Max remote distance 300 meters(dimming and output)
- DMX/RDM control up to 44fps
- AUX Power: 24V/125mA
- Time-Controlled Dimming/EOL/CLO/NTC
- Built-in DALI-2 bus power supply
- Dim-to-off & Standby power \leq 0.5W @230Vac
- Protections: SCP/OTP/OVP/OPP
- NFC programmable
- Built-in AC power metering with up to \pm 1% accuracy
- Dimming down to 0.1%
- Surge protection: CM: 10kV, DM: 10kV
- IP66 IK08
- Warranty: 5 years

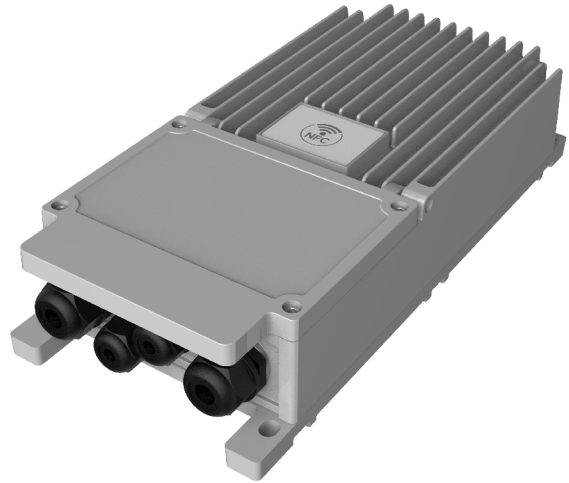

RoHS

IP66

IK08

Description

The SS-900NS-VXX is a 900W intelligent LED driver designed for advanced smart lighting applications. Supporting D4i (DALI-2), DMX/RDM, 0-10V, PWM, and resistor dimming, it is compatible with a wide range of lighting systems and controllers. It offers real-time power and brightness adjustment, scene configuration, fault monitoring, and remote management. Combined with multiple protection features, high conversion efficiency, and stable output performance, it ensures reliable operation for LED luminaires. Applications: Stadium lights, High mast lights.

Model List:

| Model | AC Input Range | Max. Pout | Vout Range | Full Power Vo Range | Iout | Default Current | THD (Typ.) | PF(Typ.) | Eff.(Typ.) | Max.Tc |
|-----------------|----------------|-----------|------------|---------------------|------------|-----------------|------------|----------|------------|--------|
| SS-900NS-V500MN | 180-528Vac | 900W | 150-500V | 252-500V | 0.35-3.57A | 1.8A | 10% | 0.95 | 97.0% | 90°C |

Note:

- 1.Default Tested: at 480Vac, full load, Ta 25°C;
2. The performance of the LED Driver can be guaranteed within the full power Vo range. The voltage lower than full power Vo range, it is need to test the performance with the LED module ;

SS-900NS-V Series ThinkLink dimming Driver

Input Characteristics:

| Parameter | Min. | Typ. | Max. | Remark |
|----------------------------|--------|---------|--------|--|
| Rated AC Input Range | 200Vac | | 480Vac | @Ta:55°C |
| AC Input Range | 180Vac | | 528Vac | Reference derating curve |
| Input Frequency Range | 47Hz | 50/60Hz | 63Hz | |
| Max Input Current | | | 5.1A | 200Vac, Full load |
| Max Input Power | | | 1020W | 200Vac, Full load |
| Max Inrush Current(220Vac) | | | 15A | Cold start |
| Max Inrush Current(277Vac) | | | 18A | Cold start |
| Max Inrush Current(347Vac) | | | 20A | Cold start |
| Max Inrush Current(400Vac) | | | 23A | Cold start |
| Max Inrush Current(480Vac) | | | 25A | Cold start |
| Standby Power | | | 0.5W | When the DALI bus power is off, 230Vac/50Hz, dimming off, D4i turns off the constant current source. |
| Power Factor | 0.95 | 0.97 | | 220Vac/50Hz, Full load |
| | 0.90 | | | 200-480Vac, 70-100% load |
| THD | | 8% | 10% | 347Vac/60Hz, Full load |
| | | | 20% | 200-480Vac, 70-100% load |

SS-900NS-V Series ThinkLink dimming Driver

O/P Characteristics:

| Parameter | Min. | Typ. | Max. | Remark |
|---|-------|---------|-------|---|
| O/P Voltage Range | 150V | | 500V | Power derated @150-252V |
| Rated O/P Voltage | 252V | | 500V | Po=Vo*Io=900W, Full load |
| Rated O/P Current | 1.8A | | 3.57A | 3.57A for 252V,1.8A for 500V |
| Adj. O/P Current (AOC) Range | 0.35A | | 3.57A | Adjustable by program |
| Constant Power Current Regulation Range | 1.8A | | 3.57A | |
| No Load Voltage | | | 600V | |
| Efficiency @220Vac | 94.0% | 96.0% | | O/P 500V/1.8A |
| Efficiency @400Vac | 95.0% | 97.0% | | O/P 500V/1.8A |
| Efficiency @480Vac | 95.0% | 97.0% | | O/P 500V/1.8A |
| O/P Current Tolerance | -5% | | +5% | |
| O/P Current Ripple(PK-AV) | | 2% | 5% | Full load |
| <3000Hz O/P Current Ripple(PK-PK) | | 1%Iomax | | 70-100% load |
| Start-up Current Overshoot | | | 10% | Full load |
| Start-up Time | | | 0.5S | Operating in DMX/RDM/ Time-controlled dimming mode, at 200-480Vac, 40%-100% load. |
| | | | 1.0S | Operating in DALI-2 Dimming mode at 200-480Vac, 40%-100% load. |
| Line Regulation | -3% | | +3% | Full load |
| Load Regulation | -3% | | +3% | |
| OTP | 90°C | 95°C | 100°C | Drop current when OTP, and it can be automatically restored after the abnormality is removed. |
| Short Circuit Protection | | | | Driver will not be damaged, Constant current mode |
| AC power metering accuracy | -1% | | +1% | 400Vac,100% load |

SS-900NS-V Series ThinkLink dimming Driver

Dimming Characteristics:

| Parameter | | Min. | Typ. | Max. | Remark |
|-------------------------------------|---------------------|-----------|----------|-----------|---|
| 0-10V Dimming (Optional) | Dim Vmax | 0V | | 12V | Negative dimming by programming Dimming prohibits reverse connection. DIM+ source current 110uA . |
| | Dim Range | 10%loset | | 100%loset | |
| | Rec.Dim Range | 0V | | 10V | |
| 0-10V Dimming (Optional) | Rec.Dim Range | 0V | | 10V | DIM+ Maximum sink current is 40uA Dimming prohibits reverse connection. 5-0V by programming |
| PWM Dimming (Optional) | PWM High | 9.8V | | 10.2V | |
| | PWM Low | 0V | | 0.3V | DIM+ source current 110uA . |
| | Frequency | 1KHz | | 2KHz | Dimming prohibits reverse connection. |
| | PWM Duty | 0% | | 100% | |
| Resistor Dimming (Optional) | Resistance | 0Kohm | | 100Kohm | |
| | Dim Range | 10%loset | | 100%loset | DIM+ source current 110uA . |
| 0-10V(Positive logic) Dim to Off | Dim off | 0.7V | 0.8V | 0.9V | By DC voltage, PWM, resistance dimming ratio |
| | Dim on | 0.8V | 0.9V | 1.0V | By DC voltage, PWM, resistance dimming ratio |
| DMX/RDM | DMX+ to DMX- | -6V | — | 6V | |
| | DMX+ to Case | 22M ohm | — | — | |
| | DMX- to Case | 22M ohm | — | — | |
| | Input Logical 0 | — | — | -0.2V | DMX+ to DMX- |
| | Input Logical 1 | 0.2V | — | — | DMX+ to DMX- |
| | Baud rate | — | 250K bps | — | |
| DALI-2 | DA+, DA- High Level | 9.5V | 16V | 22.5V | |
| | DA+, DA- Low Level | -6.5V | 0V | 6.5V | |
| | DA+, DA- Current | 0mA | | 2mA | |
| Dimming Output Range | | 0.1%loset | | loset | 1800mA ≤ loset ≤ 3570mA |

SS-900NS-V Series ThinkLink dimming Driver

Dimming Characteristics:

| Parameter | | Min. | Typ. | Max. | Remark |
|--|-------------------|------------------|------|-------|--|
| Aux Power | Rated O/P Voltage | 21.6V | 24V | 26.4V | The reference ground is "DA-" |
| | Rated O/P Current | 0 | | 125mA | The reference ground is "DA-" |
| | Peak O/P Current | 0 | | 250mA | The reference ground is "DA-". During a 6ms period, maximum duration of 250mA peak output current 2.2ms, and the average value cannot exceed 125mA. |
| Integrated DALI-2 Bus Power Supply Voltage | | 12V | 16V | 20V | |
| Integrated DALI-2 Bus Power Supply Current | | 50mA | | 60mA | |
| Life Time(Tc=70°C) | | 100,000 hours | | | 80% load,480Vac |
| MTBF | | 228,000 hours | | | 480Vac,80% load, Ta=25°C (MIL-HDBK-217F) |
| IP Grade | | IP66 | | | |
| Tc | | 90°C | | | |
| Warranty | | 5 years | | | Tc 80°C |
| Net Weight | | 3500g | | | |
| Dimension | | 320mm*145mm*68mm | | | L x W x H |

NOTE:

- 1.All the parameters above are tested Ta 25°C and LED load, unless specified.
- 2.The DALI-2 bus power supply is enabled by default and can be disabled using a programming tool or NFC programming.

SS-900NS-V Series ThinkLink dimming Driver

Environmental Requirements

| Parameter | Min. | Typ. | Max. | Remark |
|------------------------------|-------|------|-------|--------|
| Operating Temperature(Tcase) | -40°C | 25°C | +90°C | |
| Storage Temperature | -40°C | 25°C | +90°C | |
| Operation Humidity | 10%RH | | 90%RH | |
| Storage Humidity | 5%RH | | 95%RH | |

Safety and EMI/EMS Standards

| Certification | Standard | Status | Remark |
|---------------|---|--------|---------------------------|
| UL | UL8750 | | |
| CUL | CAN/CSA C22.2 No.250.13 | | |
| ENEC | EN 61347-1 EN 61347-2-13 EN IEC 62384 | | |
| RCM | AS/NZS61347.2.13 | | |
| CCC | GB/T 19510.1 GB/T 19510.213 | | |
| CE | EN 61347-1 EN 61347-2-13 EN 62493 | | |
| | EN 301 489-1 EN 301 489-3 EN 300 330 EN 62479/EN 50663/EN 50665/EN 50364 | | For NFC wireless products |

SS-900NS-V Series ThinkLink dimming Driver

Safety and EMI/EMS Standards

| EMI/EMS | Standard | Status | Remark |
|----------------------------|----------------------------------|--------|-----------------------------|
| Conduction Emission | EN IEC 55015 | | |
| | GB/T 17743 | | |
| | FCC Part 15 Subpart B;ANSI C63.4 | | ClassB |
| Radiation Emission | EN IEC 55015 | | |
| | GB/T 17743 | | |
| | FCC Part 15 Subpart B;ANSI C63.4 | | ClassB |
| Harmonic Current Emissions | EN IEC 61000-3-2 | | ClassC |
| | GB 17625.1 | | ClassC |
| Surge | IEC/EN61000-4-5 | | DM:10kV,CM:10kV,Criterion B |
| | ANSI/C82.77-5 | | DM:6kV,CM:6kV,Criterion B |
| Ring Wave | IEC/EN 61000-4-12 | | DM:6kV,CM:6kV,Criterion B |
| | ANSI/C82.77-5 | | DM:6kV,CM:6kV,Criterion B |

| DALI-2 Standard | Remark |
|-----------------------|---------------------------|
| DALI-2 ⁽¹⁾ | IEC 62386-101,-102 & -207 |

Note ⁽¹⁾DALI parts:101,102,150,207,250,251,252,253

SS-900NS-V Series ThinkLink dimming Driver

Safety Test Items:


| Safety Test Items | Technical Indicators | | | Remark |
|-------------------------|----------------------------|------------------------------|-----------------------------|--|
| Insulation Requirements | UL Insulation Requirements | ENEC Insulation Requirements | CCC Insulation Requirements | |
| Input-Case | 2U+1000Vac | 2U+1000Vac | 2U+1000Vac | Basic insulation |
| Input-Dim | 2U+1000Vac | 4U+2000Vac | 4U+2000Vac | UL Basic insulation,ENEC and CCC Reinforced insulation |
| Dim-Case | 2U+1000Vac | 2U+1000Vac | 2U+1000Vac | Basic insulation |
| Insulation Resistance | $\geq 10M\Omega$ | | | Input-Dim,Test voltage:500Vdc |
| Ground Resistance | $\leq 0.1\Omega$ | | | 25A/1min |
| Leakage Current | $\leq 0.7mA$ | | | 480Vac |

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as components.
2. Please short(ACL and ACN),(V+ and V-,NTC+/NTC-),(DA+ and DA- and Vaux+) when Hi-pottest (Turn off ARC).
- 3.When grounding, the input and output lines need to be short-circuited together.

Performance Curves:

Input Inrush Current

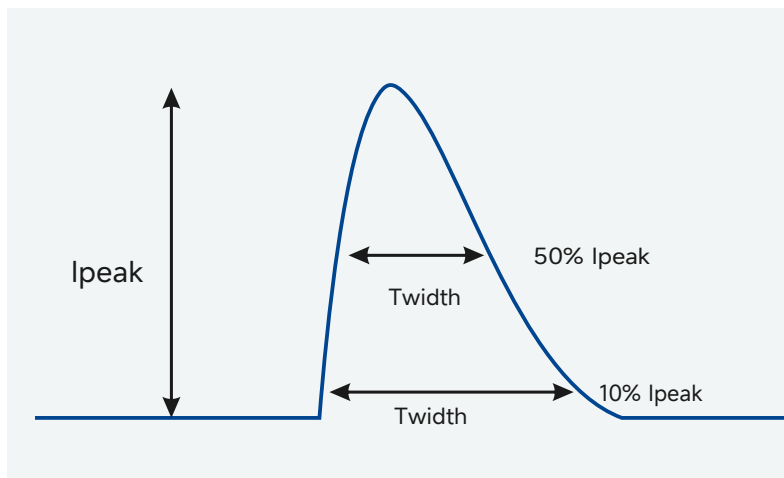


| Vin | Ipeak | T(@10% of Ipeak) | T(@50% of Ipeak) |
|--------|-------|------------------|------------------|
| 220Vac | 15A | 10ms | 3ms |
| 277Vac | 18A | 14ms | 5ms |
| 347Vac | 20A | 16ms | 6ms |
| 400Vac | 23A | 18ms | 7ms |
| 480Vac | 25A | 20ms | 8ms |

SS-900NS-V Series ThinkLink dimming Driver


Performance Curves:

O/P Voltage Vs. O/P Current(Dim/AOC Window)

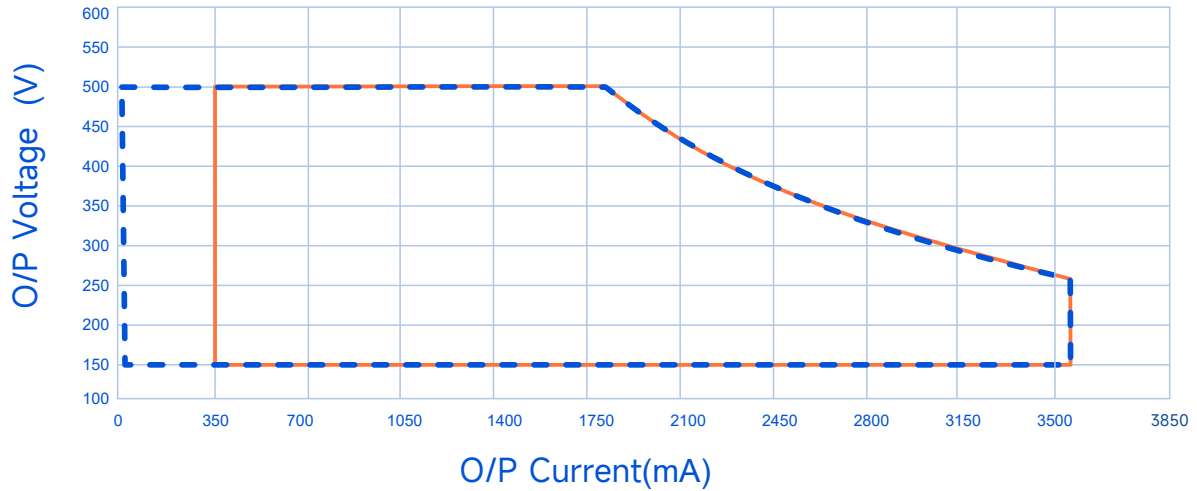

----- Dimming Window ————— AOC Window

Efficiency Vs. Output Voltage (Vin=220Vac)

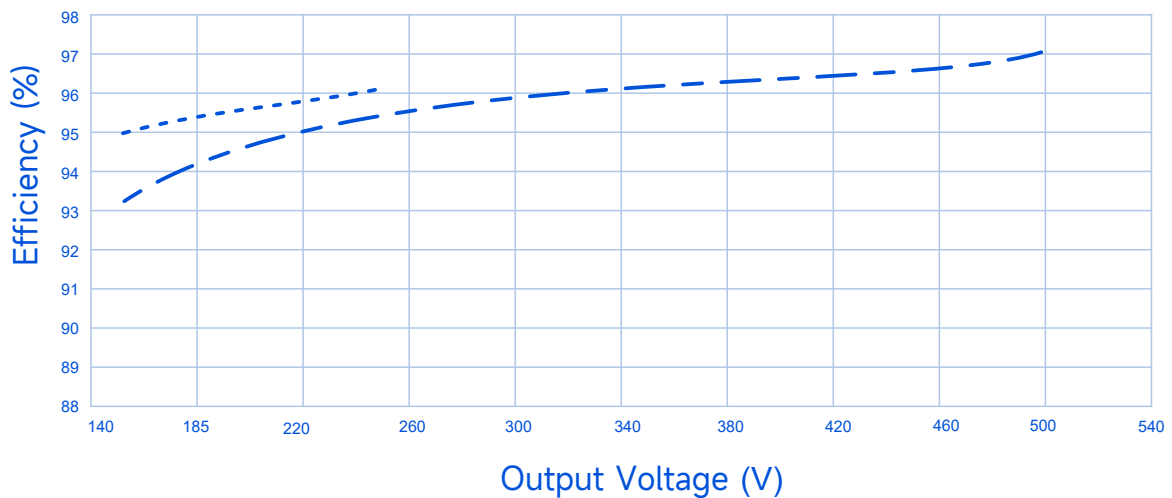


----- Io=3570mA — — — Io=1800mA


SS-900NS-V Series ThinkLink dimming Driver

Performance Curves:

Efficiency Vs. O/P Voltage ($V_{in}=400V_{ac}$)

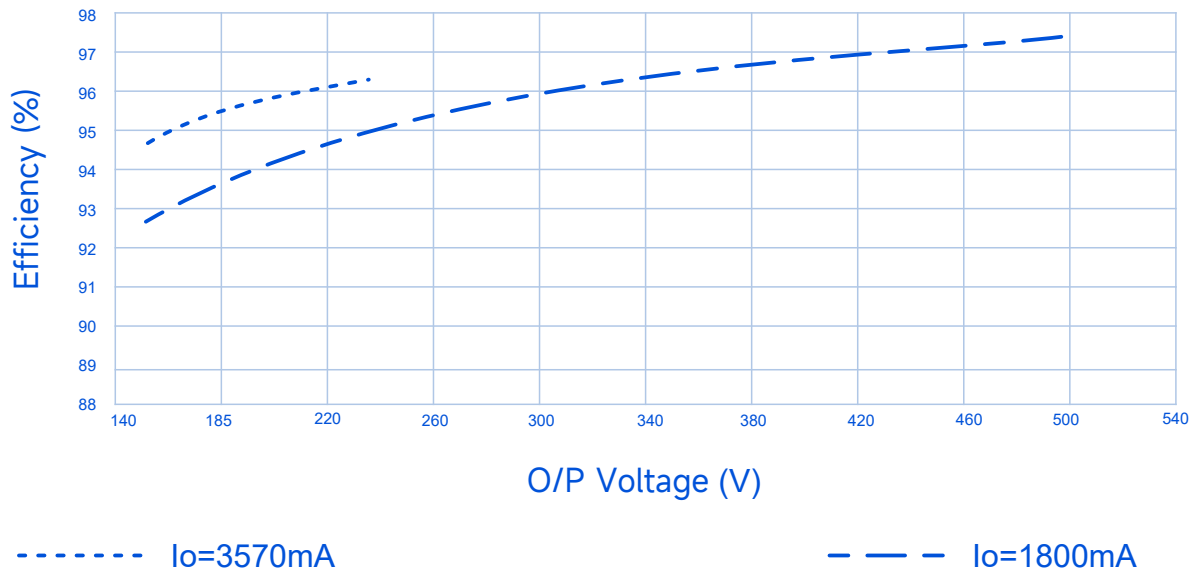


Efficiency Vs. O/P Voltage ($V_{in}=480V_{ac}$)

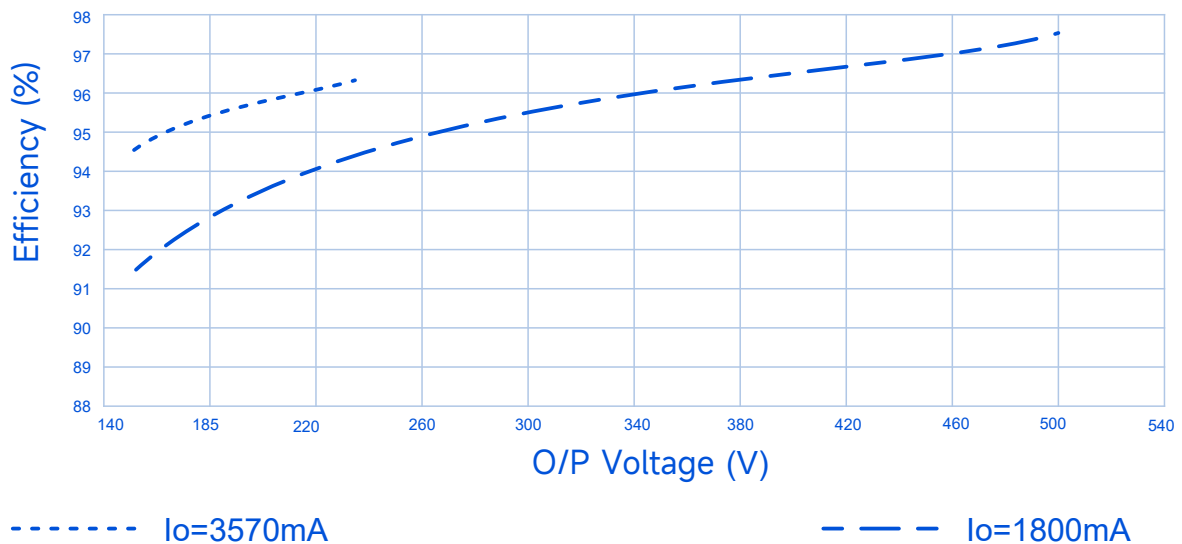


SS-900NS-V Series ThinkLink dimming Driver

Performance Curves:

Power Factor Vs. Output Power

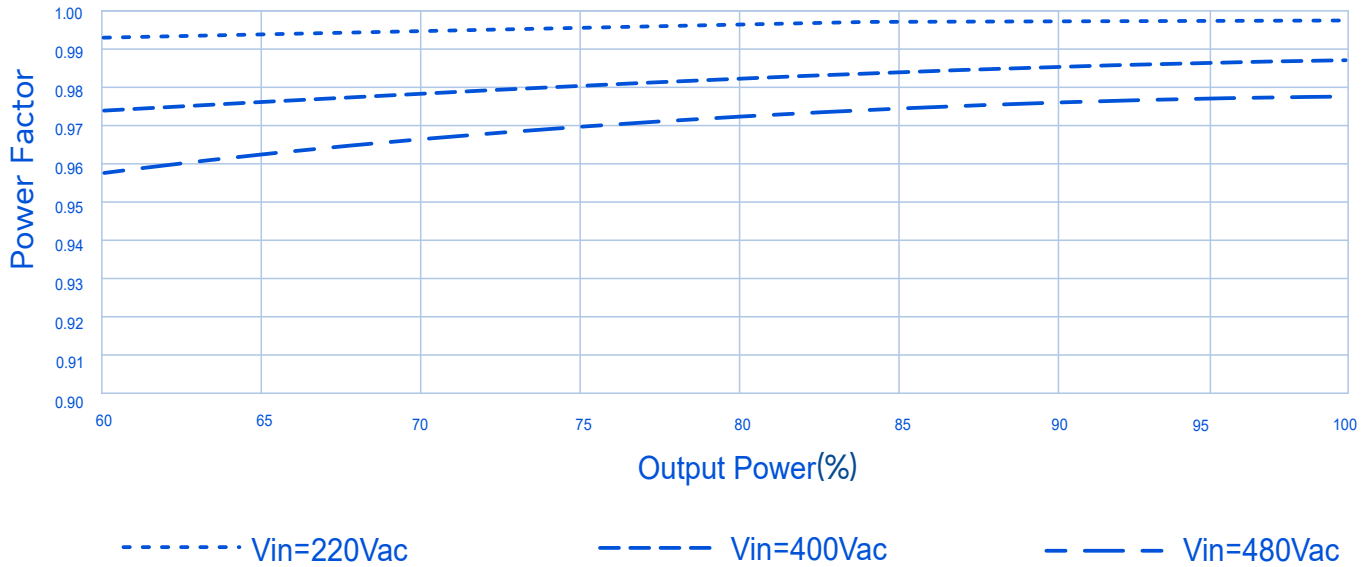


THD Vs. Output Power

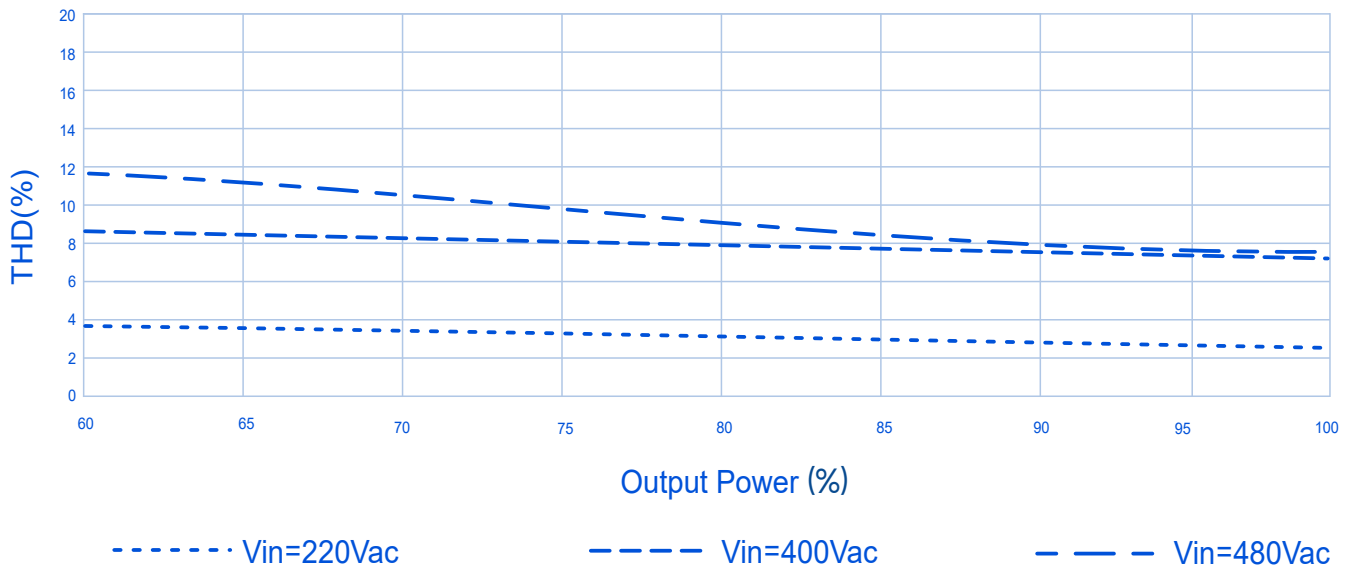


SS-900NS-V Series ThinkLink dimming Driver

Performance Curves:


Output Power Vs. Input Voltage

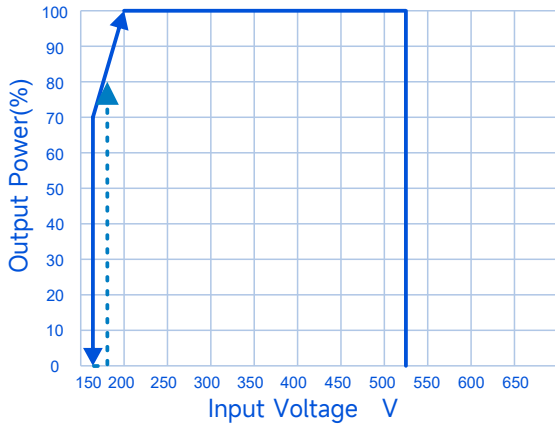


Lifetime Vs. Case Temperature

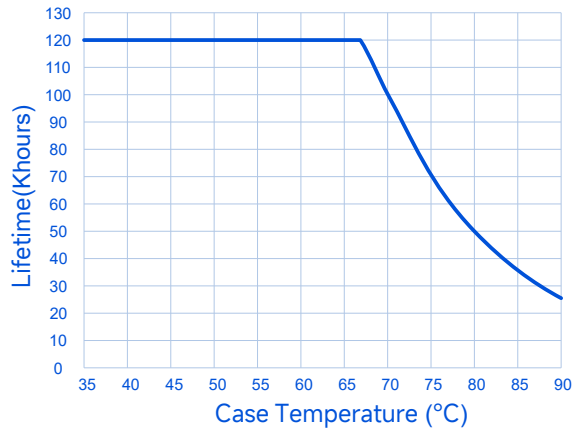


O/P Power Vs. Case Temperature

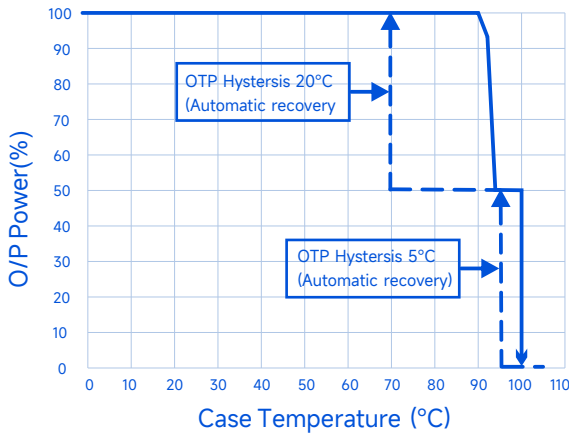


Logarithmic Dimming Curve (DALI-2/DMX model)

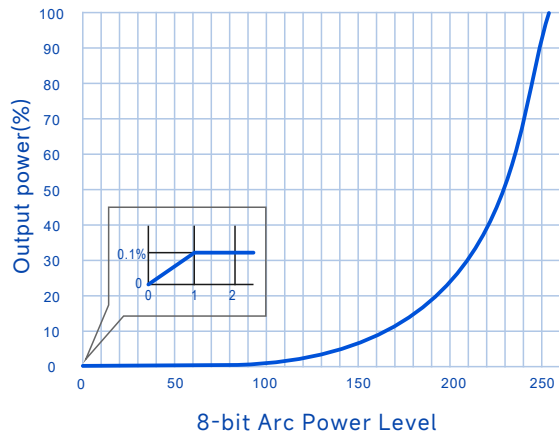

Output Power Vs. Dimming

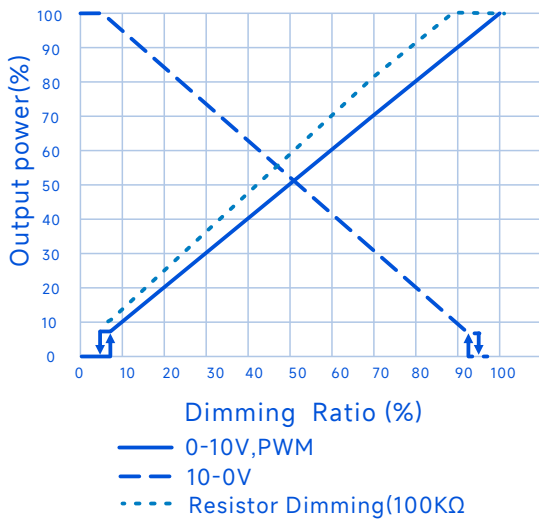


Linear Dimming Curve (DALI-2/DMX model)

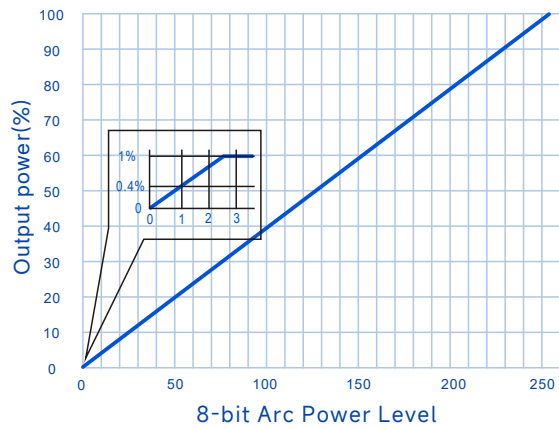

External heat protection

The overheat protection of an LED luminaire shall be implemented by an external circuit installed at the hottest part of the luminaire, so as to protect the entire luminaire when the temperature exceeds the rated value. This protection circuit shall be connected to the V+ and NTC terminals of the LED driver. The default protection temperature threshold is 100°C, which can be adjusted via the Sosen PC Software according to the actual on-site application requirements.

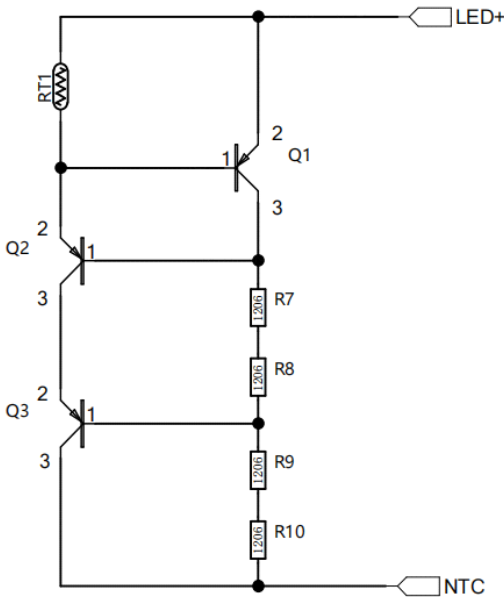


| Reference | Description | Recommendation |
|--------------|----------------------------------|--|
| Q1/Q2/Q3 | 500V PNP high-voltage transistor | FZT560, SOT-223, DIODES |
| RT1 | NTC 10KΩ | 0603 SMD 1% TDK b57371v2103h060 B(25/100)=4480 |
| R7/R8/R9/R10 | 510KΩ Resistor | 510KΩ 1% -55~155°C 1206 |

| | | | | |
|--------------|------|-----|-----|-----|
| TLED(°C) | 70 | 90 | 100 | 105 |
| NTC value(Ω) | 1426 | 685 | 488 | 415 |
| IOUT(%) | 100 | 10 | 10 | 10 |

Note:

This protection is optional, and users can leave the NTC port hanging when they do not use this function.

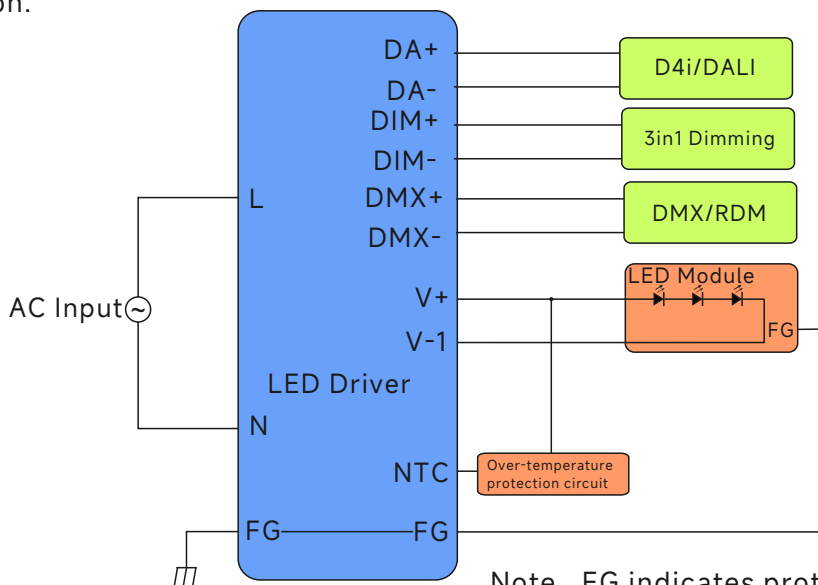

Note FG indicates protective grounding.

SS-900NS-V Series ThinkLink dimming Driver

Strobe function

The LED driver supports the strobe function in DMX/RDM mode. The frequency can be set within the range of 0.1-22 Hz, which corresponds to a maximum adjustable frame rate of 44 fps (frames per second). The dimming level cycles repeatedly between 100% and 0%. To improve the reliability of the output relay, the relay remains in a closed state while the strobe function is activated, and thus will not undergo frequent switching on and off.

Timer Dimming:

Automatic conversion between DST and Standard Time. Traditional Timer Dimming, Self-Adapt-Midnight Timer, Self-Adapt-Percentage Timer. The time dimming percentage can be set by setting 8 curves.

Traditional timer: After power-on, it works according to the set timing curve (Increasing fade time allows for slow changes between different dimming levels, preventing sudden changes in brightness and causing dazzle)

Self Adapting-Midnight: Automatically save power-on times and use 4 valid timers to assume that the center point of the dimming curve is local midnight time.

Self Adapting-Percentage: Runs the initially set dimming curve according to an automatically calculated adaptive cycle time.


CLO Constant Lumen Output:

Light failure compensation function, in the Luminaire life cycle, by gradually increasing the output current, to achieve a constant output of LED luminous flux, the overall luminous effect remains unchanged.

ELA End-of-Life Alert:

By presetting a LED driver life time, such as 50KH, after the luminaire has accumulated 50KH of light-up time, every time the luminaire is powered on, it will blink 4 times to remind the user to replace the LED driver.

Programming connection diagram:

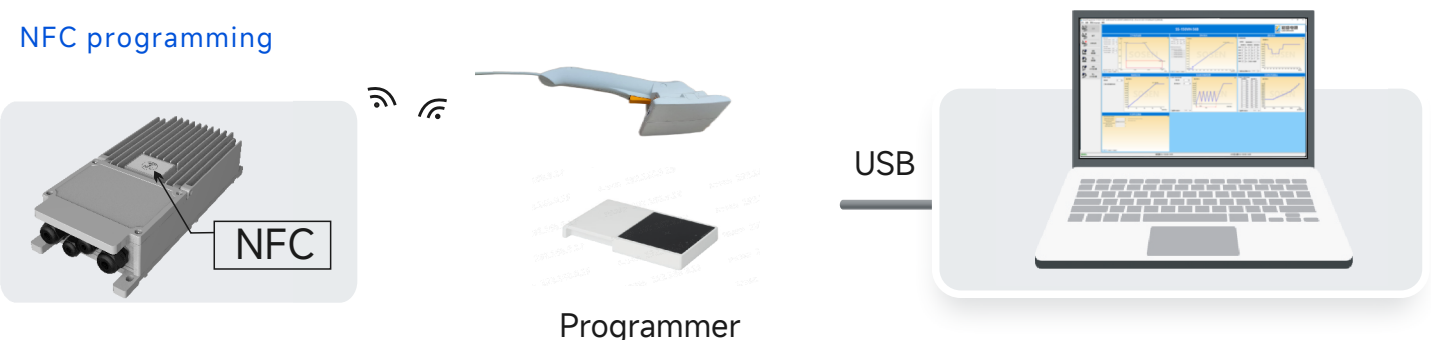


Note

1. Power must be disconnected during NFC programming; otherwise, the programming data cannot be saved.
2. Use a handheld or board-type programmer to program the area directly above the NFC.


SS-900NS-V Series ThinkLink dimming Driver

Mechanical Characteristics

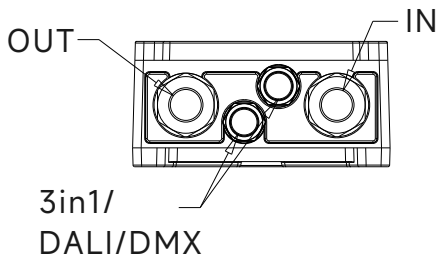

| Function Definition | Cable Gland | Recommended Wire Diameter (mm) | Wire Marking (AWG) | Wire Cross-Sectional Area (mm ²) | Strand Length(mm) |
|---------------------|-------------|--------------------------------|--------------------|--|-------------------|
| AC Input | M20 | 6-11 | 14-17 | 1.0-2.5 | 9-10 |
| DC Output | M20 | 6-11 | 14-17 | 1.0-2.5 | |
| DALI | M16 | 4.5-8.5 | 16-18 | 0.75-1.5 | |
| DMX | | | | | |
| DALI Cascade | M16 | 4.5-8.5 | 16-18 | 0.75-1.5 | |
| DMX Cascade | | | | | |


Terminal diagram

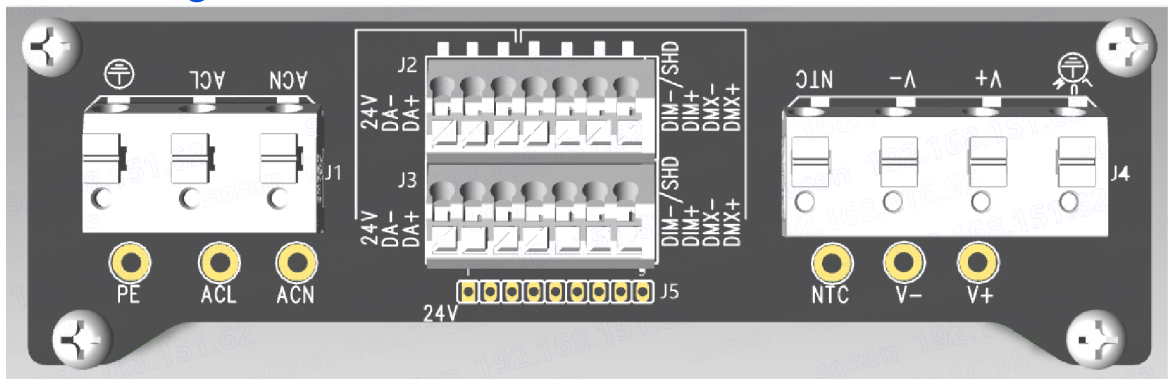

| PIN | LABEL | FUNCTION |
|-----|----------|-------------------------------------|
| 1 | ⊕ | Protective Earth (PE) |
| 2 | ACL | AC Input L/L1 |
| 3 | ACN | AC Input N/L2 |
| 4 | 24V | 24V Output Cable |
| 5 | DA- | DALI Input/Output- |
| 6 | DA+ | DALI Input/Output+ |
| 7 | DIM-/SHD | DIM Input/Output-/DMX Shield Ground |
| 8 | DIM+ | DIM Input/Output+ |
| 9 | DMX- | DMX Input/Output- |
| 10 | DMX+ | DMX Input/Output+ |
| 11 | NTC | LED Thermal Protection Input |
| 12 | V- | LED- Connect |
| 13 | V+ | LED+ Connect |
| 14 | ⊕ | LED Module Grounding Protection |

SS-900NS-V Series ThinkLink dimming Driver

Mechanical Characteristics

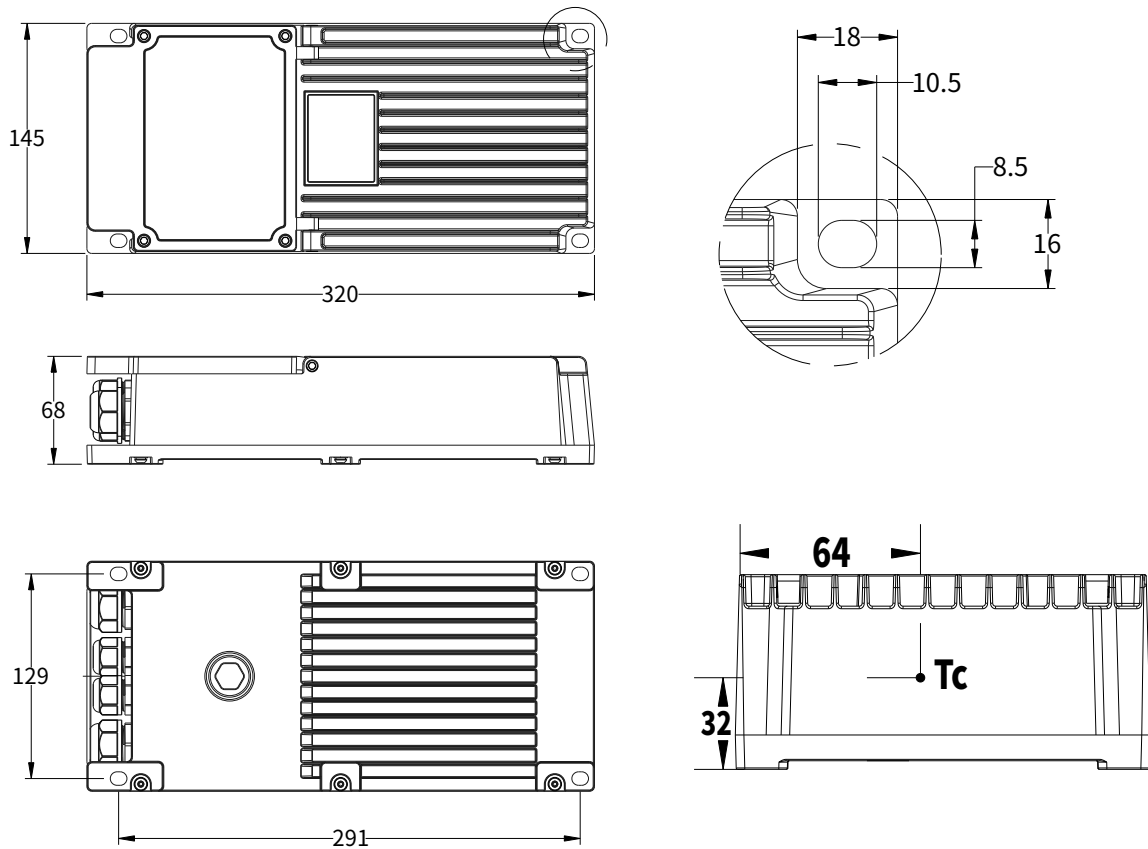

SS-900NS-V Series ThinkLink dimming Driver



Assembly Tips

1. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.
2. The trace routing on aluminum substrates is designed in compliance with creepage distance requirements specified by relevant certification regulations.
3. The creepage distance between LED+ and LED- on the aluminum substrate is designed in compliance with the relevant certification regulations.
4. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
5. It is recommended to design LED beads in parallel first and then in series.
6. The insulation level of LED light panels should meet the reliability design requirements.
7. It's recommended to add resistors or capacitors in parallel with the LED on PCB to reduce the risk of surge when a non isolated LED driver is used for the luminaire
8. For other precautions, please refer to the "LED Driver User Manual" and "SOSEN LED driver Product User Guide NS-V Non-isolated Series 5-in-1 Intelligent LED Driver".

Warning

Insufficient or compromised insulation voltage resistance in LED light panels may cause breakdown and short circuits to earth, resulting in damage to the luminaire and LED driver, and posing significant safety hazards. It is recommended to install a residual current device (RCD) during application.

Package

- Outside carton dimension: L×W×H =577mm×385mm×162mm;
- 3PCS/Carton;
- Net weight/Piece: 3.5kg;Gross weight/Carton:12.1kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873-83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

| Version | Description of Update | Updated Date | Remark |
|---------|-----------------------|--------------|--------|
| V00 | Original Release | 2026/03/27 | |
| | | | |
| | | | |
| | | | |
| | | | |