

SOSEN LED Driver, Your Smart Choice

Specifications

SS-190EP-M54* LED Driver

Model: SS-190EP-M54*

Description: 190W LED Driver

Rev.: V03

Release Date: 2026-05-22


SS-190EP-M54* LED Driver

SOSEN
LED DRIVER



LED DRIVER

EP-M54BH2

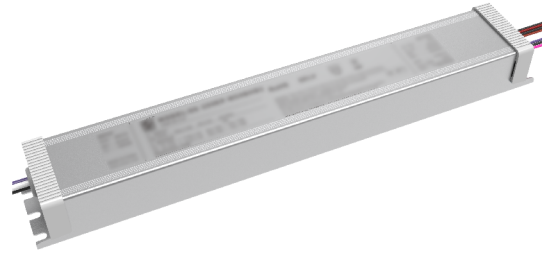

Features:

- Efficiency up to 92.5%
- Isolated dimming: 0-10V, PWM, Resistor
- Protections: SCP/OTP/OVP/OPP
- Dual outputs with programmable outputs
- ULClass 2
- ULClass P
- AUX Power: 12V/0.2A
- Surge protection: CM: 6kV, DM: 6kV
- Warranty: 5 years

Class 2

Class P



RoHS

SELV



Description:

SS-190EP-M54* are 190W constant current LED Driver with wide O/P voltage and adjustable O/P current. It has high efficiency, compact housing, good cooling, all-around protections. LED luminaries manufactures can easily design luminaries and reduce cost.

Applications:

High Pole lighting, Wall washer lighting, Flood lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	Default Current	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-190EP-M54*	108-380Vac	95W (CH1)	18-54V	36-54V	0.35-2.64A	1.76A	6%	0.95	92.5%	90°C
		95W (CH2)	18-54V	36-54V	0.35-2.64A	1.76A				

Note:

- 1.Default Tested: at 277Vac, full load, Ta 25°C.
- 2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module;
- 3.Pout=CH1+CH2 =95W+95W=190W.

SS-190EP-M54* LED Driver

Input Characteristics:

“*” Means Additional Function

“”	AUX 12V (suffix:H)	Dimming off 0-10V/PWM/Resistor	Adjust power (Single DIP)	Optical control	Remark
BH2	✓	✓			
BHB2	✓	✓	✓		

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	120Vac		347Vac	
AC Input Range	108Vac		380Vac	Derating below 120Vac, Ref. derating curve
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			2.1A	120Vac, Full load
Max Input Power			230W	120Vac, Full load
Max Inrush Current(120Vac)			50A	Cold start
Max Inrush Current(277Vac)			110A	Cold start
Max Inrush Current(347Vac)			140A	Cold start
Standby Power			0.5W	277Vac/60Hz, Dim off
Power Factor	0.92	0.95		347Vac/60Hz, Full load
	0.90			120-347Vac/60Hz, 70%-100% load
THD		6%	10%	347Vac/60Hz, Full load
			20%	120-347Vac/60Hz, 70%-100% load

SS-190EP-M54* LED Driver

Po1 Po2 O/P Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	18V		54V	Power derated @18-36V
Rated O/P Voltage	36V		54V	CH1=Vo*Io=95W, Full load CH2=Vo*Io=95W, Full load
Rated O/P Current	1.76A		2.64A	2.64A for 36V, 1.76A for 54V
Adj. O/P Current (AOC) Range	0.35A		2.64A	
No Load Voltage			60V	
Efficiency @120Vac	88.0%	89.0%		O/P 54V/1.76A
Efficiency @277Vac	91.0%	92.0%		O/P 54V/1.76A
Efficiency @347Vac	91.5%	92.5%		O/P 54V/1.76A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)			10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			1.0S	120Vac, Full load
			0.75S	347Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	95°C	100°C	105°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged

SS-190EP-M54* LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
Aux Power	O/P Voltage	10.8V	12V	13.2V	
	O/P Current			200mA	
0-10V Dimming (Optional)	Dim Vmax	0V		12V	DIM+ source current 110uA.
	Dim Range	10%Iomax		100%Ioset	Dimming prohibits reverse connection
	Rec.Dim Range	1V		10V	
PWM Dimming (Optional)	PWM High	9.8V		10.2V	DIM+ source current 110uA.
	PWM Low	0V		0.3V	Dimming prohibits reverse connection
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	Not available with negative logic
	Dim Range	10%Iomax		100%Ioset	DIM+ source current 110uA.
Dim to Off (Optional)	Dim off	7%	8%	9%	By DC voltage, PWM, resistance dimming ratio
	Dim on	9%	10%	11%	By DC voltage, PWM, resistance dimming ratio
Dialing code function (Optional)	Dialing Range	1.3A		2.64A	The user should configure the resistance value themselves, and be sure to pay attention to the length of the wiring to avoid interference.
Lifetime($T_c \leq 85^\circ\text{C}$)		$\geq 50,000$ hours			80% load
MTBF		205,000 hours			220Vac, Full load, $T_a = 25^\circ\text{C}$ (MIL-HDBK-217F)
T_c		90°C			
Warranty		5 years			T_c : 85°C
Net Weight		950g			
Dimension		360mm*45.5mm*31mm			L x W x H

NOTE: All the parameters above are tested $T_a 25^\circ\text{C}$ and LED load, unless specified.

SS-190EP-M54* LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	Criterion	Remark
Conduction Emission	FCC Part15: Subpart A ANSI 63.4:2014	Class A
Radiation Emission	FCC Part15: Subpart A ANSI 63.4:2014	Class A
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	ANSI/C82.77-5-2017	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	ANSI/C82.77-5-2017	DM: 6kV,CM: 6kV,Criterion B

SS-190EP-M54* LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators	Remark
Insulation Requirements	UL Insulation Requirements	
Input-Case	2U+1000	
Input-Dim	2U+1000	
Dim-Case	500Vac	
Insulation Resistance	$\geq 10\text{M}\Omega$	Input-O/P, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$	25A/1min
Leakage Current	$\leq 0.75\text{mA}$	347Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+ and Vaux-) when Hi-pot test.

Performance Curves:

Input Inrush Current

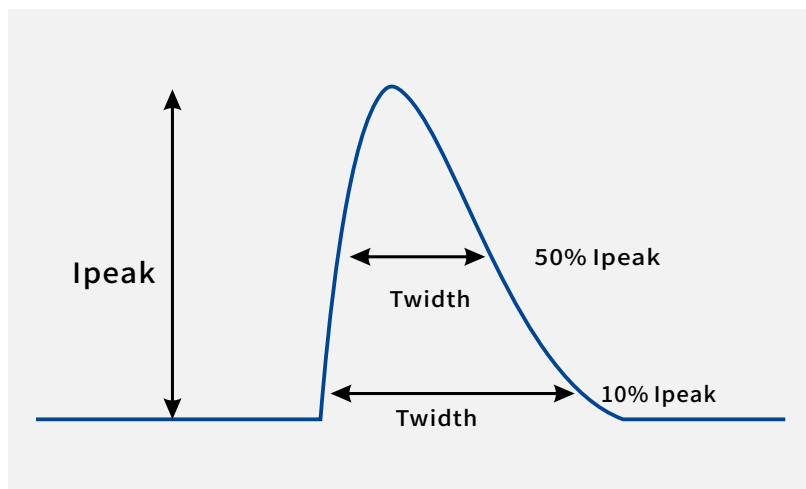


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
120Vac	50A	800uS	550uS
277Vac	110A	700uS	500uS
347Vac	140A	900uS	600uS

注: Driver is compliant per NEMA 410-2015

SS-190EP-M54* LED Driver


Performance Curves:

O/P Voltage Vs. O/P Current(Dim/AOC Window)

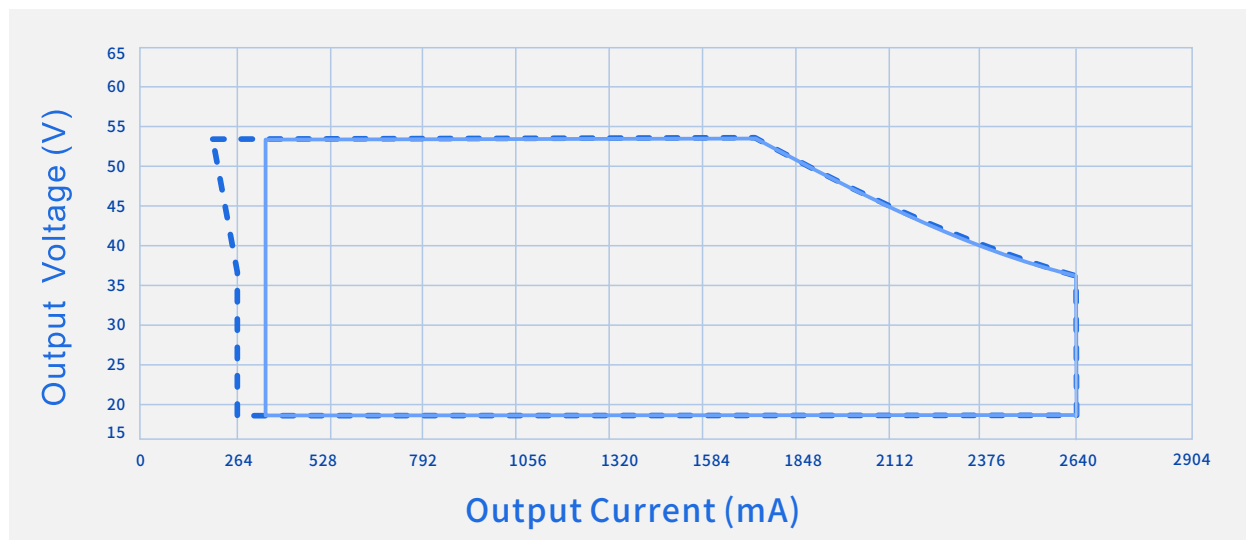

----- Dimming Window ————— AOC Window

Efficiency Vs. O/P Voltage (Vin=120Vac)

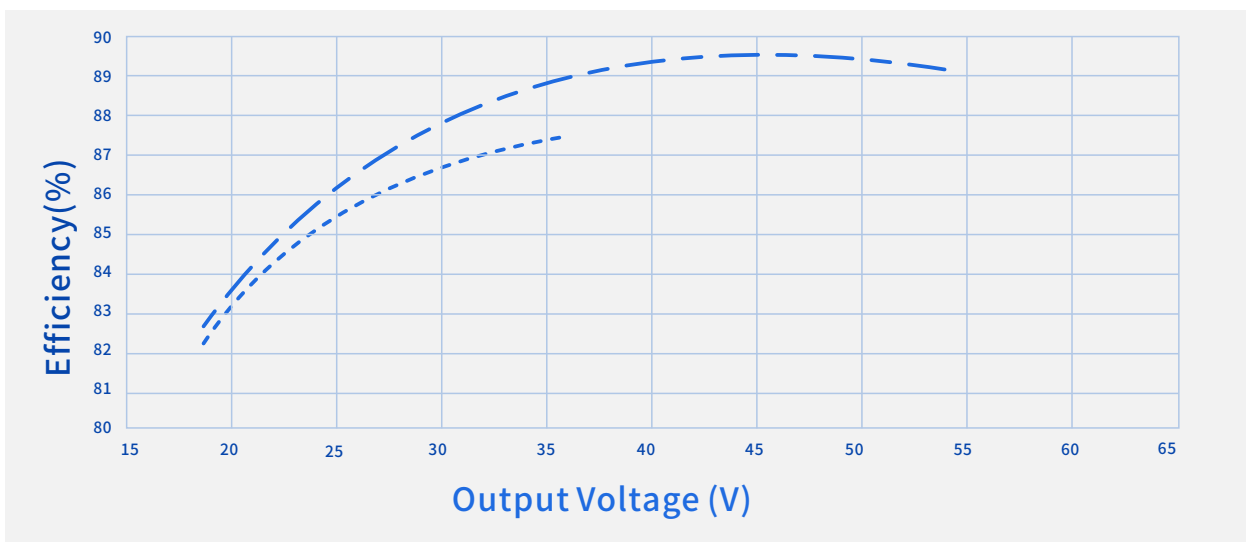


----- Io=2640mA

- . - . Io=1760mA

SS-190EP-M54* LED Driver

Performance Curves:


Efficiency Vs. O/P Voltage ($V_{in}=277V_{ac}$)

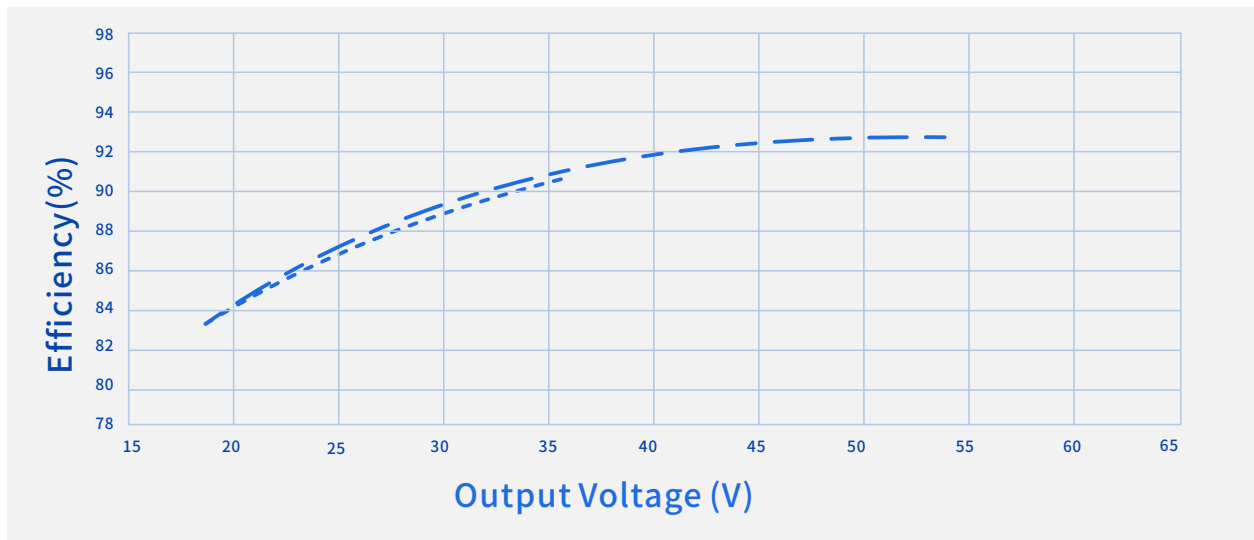

----- $I_o=2640mA$

- . - . $I_o=1760mA$

Efficiency Vs. O/P Voltage ($V_{in}=347V_{ac}$)

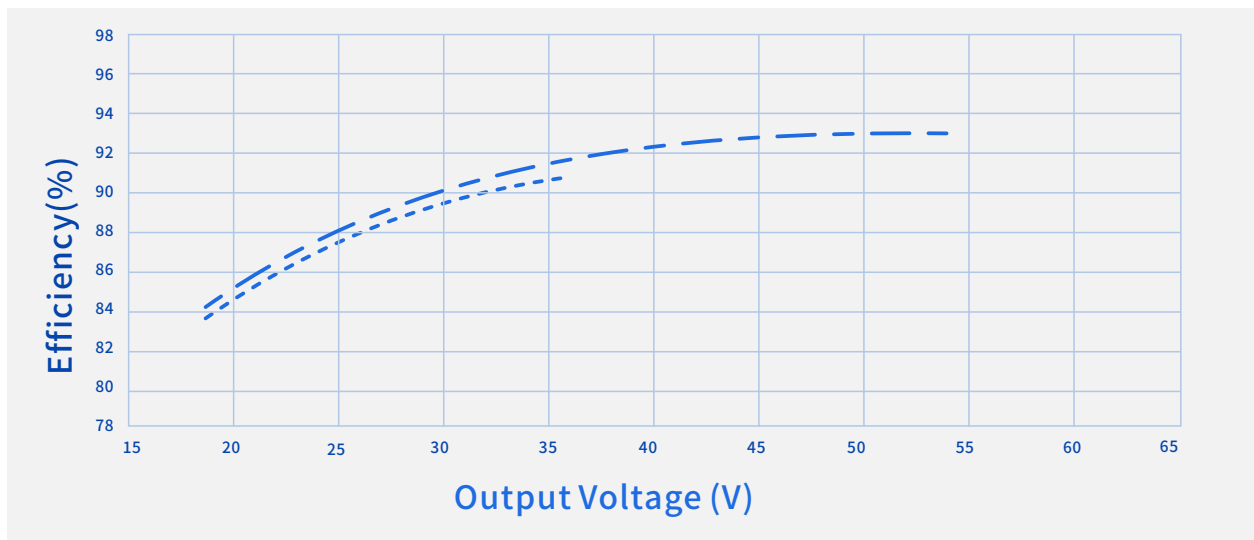


----- $I_o=2640mA$

- . - . $I_o=1760mA$

SS-190EP-M54* LED Driver


Performance Curves:

Power Factor Vs. O/P Power

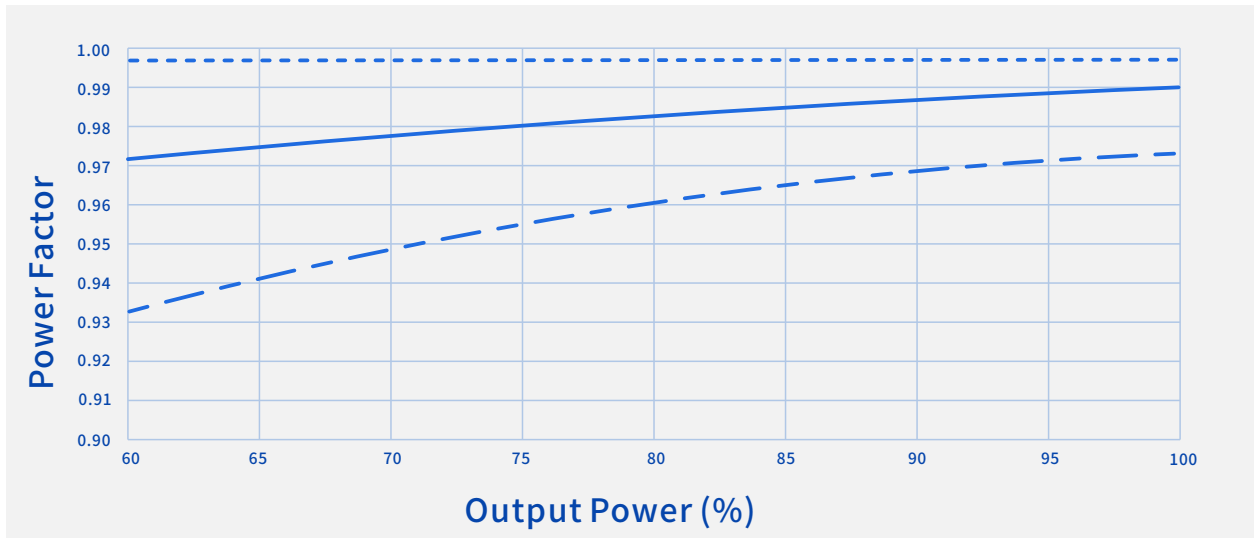

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac

THD Vs. O/P Power

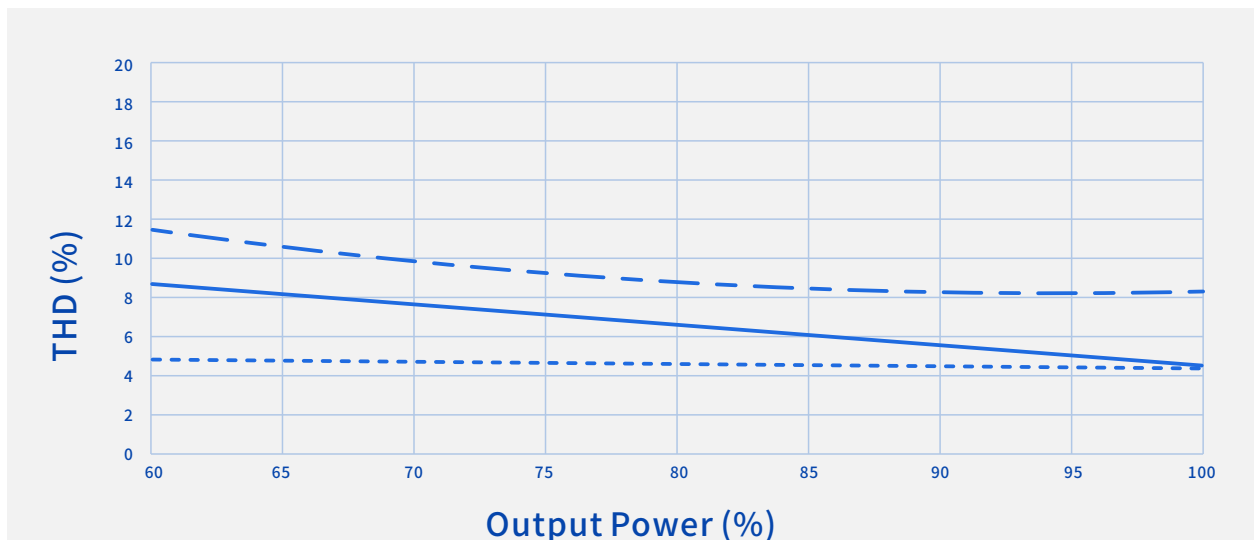


----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac


SS-190EP-M54* LED Driver

Performance Curves:


O/P Power Vs. Input Voltage($T_a=55^{\circ}\text{C}$)

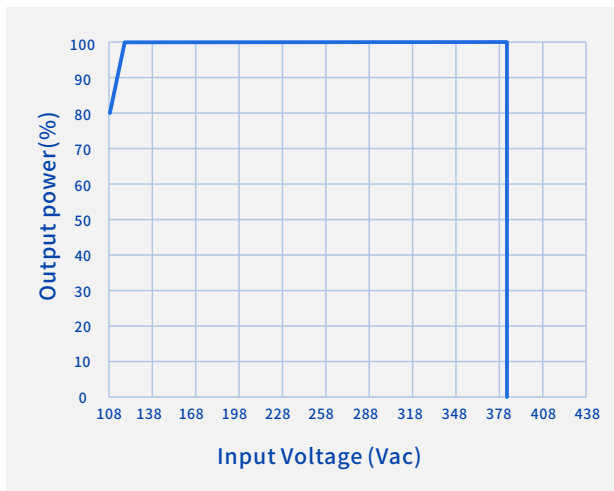


O/P Power Vs. Case Temperature

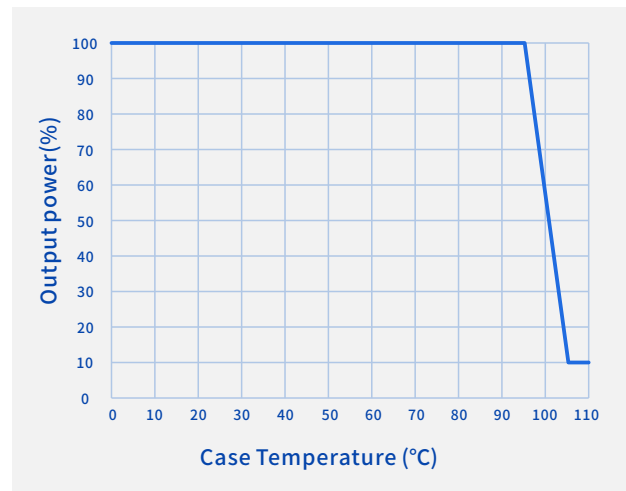

O/P Power Vs. Dimming

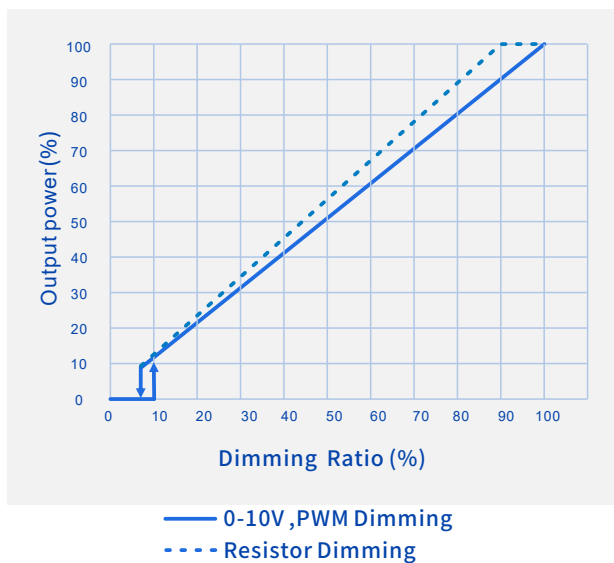

Lifetime Vs. Case Temperature

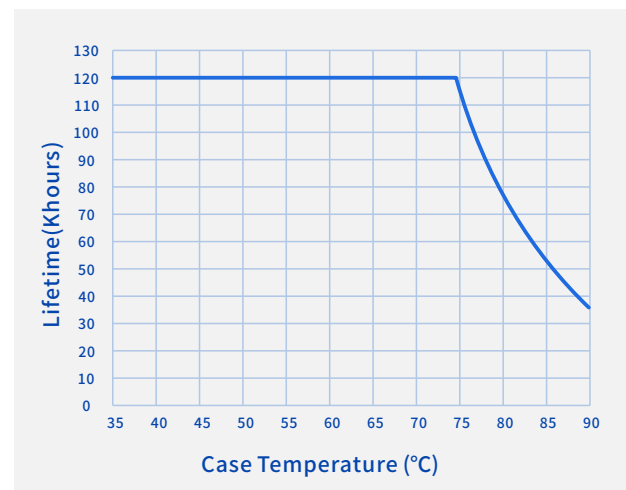


SS-190EP-M54* LED Driver

Programming Connection Diagram:

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

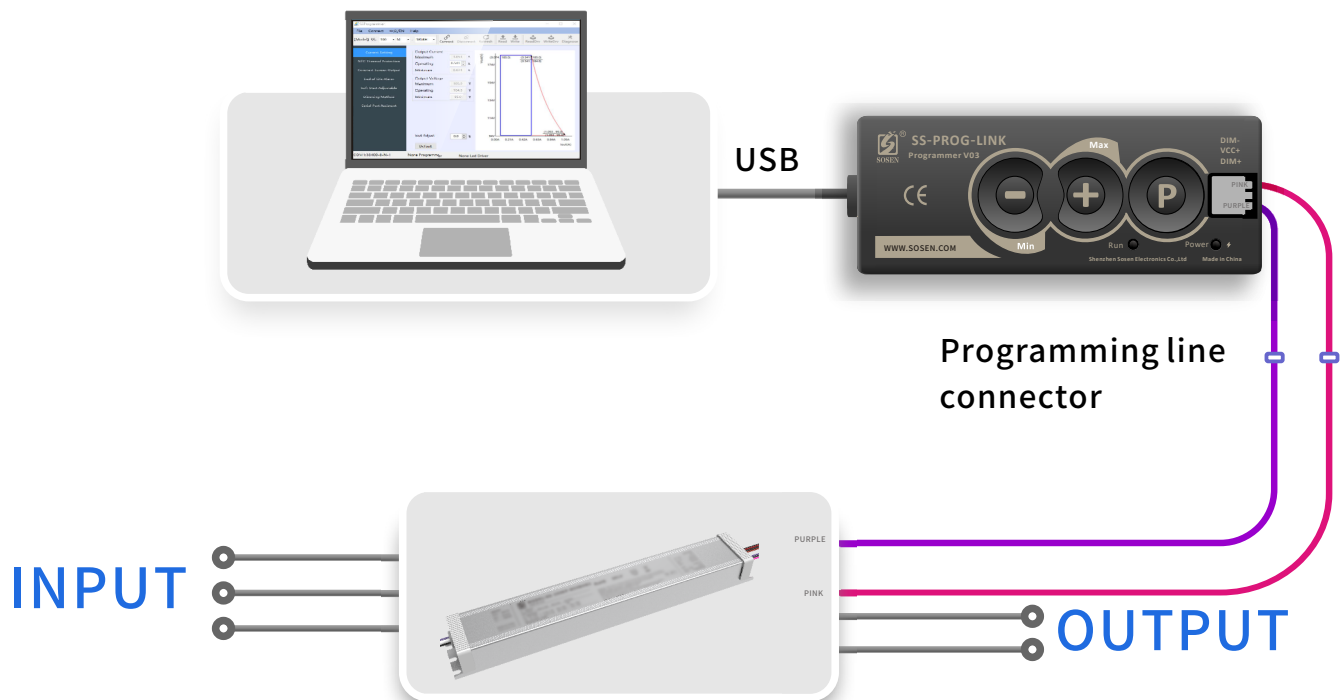


Note:

Programming could be completed by off-line mode either without turn on the Driver nor without PC, other than the traditional on-line mode.

SS-190EP-M54* LED Driver

Mechanical Characteristics

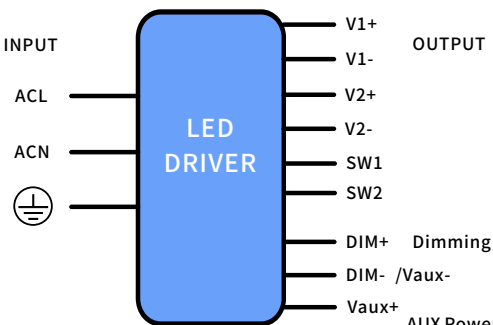

The diagram shows a blue rectangular LED DRIVER component with pins on both sides. On the left, labeled 'INPUT', are three pins: ACL, ACN, and a ground symbol. On the right, labeled 'OUTPUT', are eight pins: V1+, V1-, V2+, V2-, SW1, SW2, DIM+ (labeled 'Dimming'), and DIM- /Vaux- (labeled '/Vaux-'). Below the DIM- pin is a pin labeled 'Vaux+' labeled 'AUX Power'.


AC Input Cable(Twisted wire, Exposed Length 300±10mm):
UL model: UL1050, 18AWG 105°C 600V O.D: 2.77mm,Black:ACL,White:ACN,Green: 

DC Output Cable(Twisted wire, Exposed Length 300±10mm):
UL model: UL1569, 18AWG, Φ1.85-2.05, 300V, 105°C, Red:V1+
UL1569, 18AWG, Φ1.85-2.05, 300V, 105°C, Red:V2+
UL1569, 18AWG, Φ1.85-2.05, 300V, 105°C, Black:V1-
UL1569, 18AWG, Φ1.85-2.05, 300V, 105°C, Black:V2-

DIM/AUX Power Cable(Twisted wire, Exposed Length 220±10mm):
UL model: UL1569, 22AWG, Φ1.42-1.625, 300V, 105°C, Purple: DIM+
UL1569, 22AWG, Φ1.42-1.625, 300V, 105°C, Pink: DIM- /Vaux-
UL1569, 22AWG, Φ1.42-1.625, 300V, 105°C, Black/White: Vaux+

SW dialing Cable(Exposed Length 140±10mm) (sleeved):
UL/EU model: UL1569, Orange: SW1, Orange: SW2.

Name Description	Standard Code	mm(In.)
Case Width	W1	45.5(1.79)
Mounting Hole Width	W2	28(1.1)
Mounting Hole Width	W3	14(0.55)
Overall Length	L1	360(14.17)
Mounting Hole Length	L2	352(13.86)
Case Length	L3	346(13.62)
Case Height	H	31(1.22)
TC Point Position	X	190(7.48)
TC Point Position	Y	20(0.79)

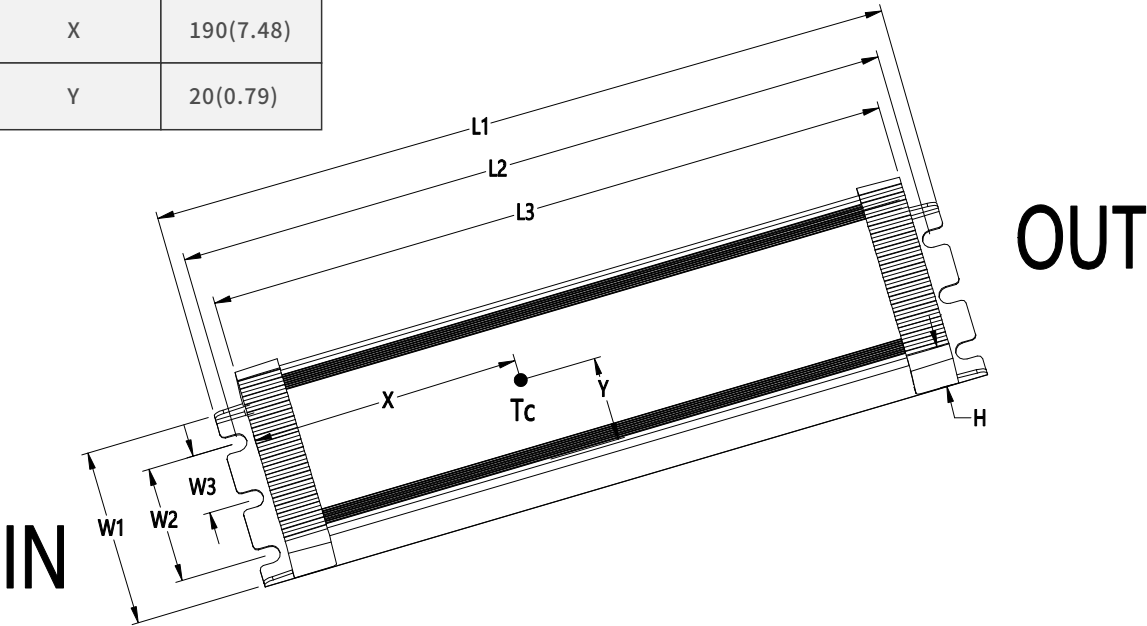

SS-190EP-M54* LED Driver



Assembly Tips

1. Dimming tinned connectors should be capped if not used to avoid dimming parts damage from external signals.

Package

- Outside carton dimension: $L \times W \times H = 495\text{mm} \times 385\text{mm} \times 162\text{mm}$;
- 10PCS/Carton;
- Net weight/Piece: 0.95kg; Gross weight/Carton: 11.2kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873—83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2024/07/17	
V01	Updated standby power consumption and derating curves	2025/01/09	
V02	Updated structural dimensional characteristics	2025/02/27	
V03	Add a model	2026/05/22	