

SOSEN LED Driver, Your Smart Choice

Specifications

SS-1200VP-GL Integrated Series LED Driver

Model: SS-1200VP-GLXXBH*

Description: 1200W Integrated
LED Driver

Rev.: V01

Release Date: 2025-07-10

SS-1200VP-GL Integrated Series LED Driver

SOSEN
LED DRIVER



LED DRIVER

VP-GL Integrated Series



Features:

- Efficiency up to 95.2%
- Dimming: 0-10V,PWM,Resistor,Timing
- Dim-to-Off
- Surge Protection: CM: 10kV, DM: 6kV
- AUX Power: 12V/0.2A
- Constant Lumen, Life Warning
- External NTC to Protect LED Module
- Standby Power<0.5W
- Communication Function With PC
- Type HL, suitable for hazardous locations
- Protections: SCP/OTP/OVP
- Warranty: 5 years



Description:

SS-1200VP-GL Integrated series are 1200W constant current LED Driver with wide O/P voltage range and adjustable O/P current by program.LED luminaries manufactures can easily design luminaries and reduce cost.

Application:

Plant lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vout Range	Iout	Default Current	THD (Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-1200VP-GL56 BH*	180-305Vac	1200W	28-56V	48-56V	2.45-25.0A	25.0A	10%	0.95	95.2%	90°C

Note:

- Default Tested: at 230Vac, full load, Ta 25°C.
- The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module;

SS-1200VP-GL Integrated Series LED Driver

后缀“*”功能可选机型表

“*”	AC INPUT		DC OUTPUT				Dimming		Remark
	Cable	M19-3Pin	Cable	M19-2Pin	M19-3Pin	M19-4Pin	Knob&RJ25	M12-3Pin	
B	✓		✓				✓		
B-M4		✓				✓	✓		
-M4		✓				✓		✓	

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	200Vac		277Vac	
AC Input Range	180Vac		305Vac	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			10A	120Vac, 80% load
Max Input Power			1430W	200Vac, full load
Max Inrush Current(230Vac)			59A	Cold Start
Max Inrush Current(277Vac)			93A	Cold Start
Standby Power			0.5W	230Vac/50Hz, Dim to off
Power Factor	0.95	0.97		230Vac/50Hz, full load
	0.90			200-277Vac/50Hz, 70-100% load
THD		8%	10%	230Vac/50Hz, full load
			20%	200-277Vac/50Hz, 70-100% load

SS-1200VP-GL Integrated Series LED Driver

O/P Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	28V		56V	Power Derated @28-48V
Rated O/P Voltage	48V		56V	$P_o = V_o \cdot I_o = 1200W$, full load
Rated O/P Current	21.4A		25.0A	25.0A for 48V, 21.4A for 56V
Adj. O/P Current (AOC) Range	2.45A		25.0A	By Programming
No Load Voltage			60V	
Efficiency @230Vac	93.0%	94.5%		O/P 56V/21.4A
Efficiency @277Vac	93.5%	95.2%		O/P 56V/21.4A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	230Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient		0.03%/°C		Tc:0°C~90°C
OTP	90°C	95°C	100°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver not be damaged

SS-1200VP-GL Integrated Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
AUX Power	O/P Voltage	11.4V	12V	13.8V	
	O/P Current	0mA	200mA		
0-10V Dimming Positive logic (Optional)	Dim Vcc	0V		12V	Negative dimming by programming Dimming prohibits reverse connection. DIM+ source current 110uA .
	Dim Range	10%loset		100%loset	
	Rec.Dim Range	0V		10V	
0-10V Dimming Negative logic (Optional)	Rec.Dim Range	0V		10V	DIM+ Maximum sink current is 40uA Dimming prohibits reverse connection. 5-0V by programming
PWM Dimming (Optional)	PWM High	9.8V		10.2V	Negative dimming by programming
	PWM Low	0V		0.3V	DIM+ source current 110uA .
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	Negative dimming by programming
	Dim Range	10%		100%	DIM+ source current 110uA .
0-10V Dim to Off	Dim off Voltage	0.7V	0.8V	0.9V	By DC voltage, PWM, resistance dimming ratio
	Dim on Voltage	0.8V	0.9V	1.0V	By DC voltage, PWM, resistance dimming ratio
Timing Curve(Optional)		By programming			
Constant Lumen(Optional)		By programming			
Life Warning(Optional)		By programming			
Life Time(Tc≤75°C)		50,000 hours			80% Load
MTBF		202,300 hours			230Vac,full load, Ta=25°C (MIL-HDBK-217F)
Tc		90°C			
Warranty		5 years			Tc: 75°C
Net Weight		3750g			
Dimension		461mm*89.5mm*49mm			L x W x H

NOTE:

1,All the parameters above are tested Ta 25°C and LED load, unless specified.

SS-1200VP-GL Integrated Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/CUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015	
	FCC Part 15 Subpart B; ANSI C63.4:2014	277Vac: Class A
Radiation Emission	EN55015:2013+A1:2015	
	FCC Part 15 Subpart B; ANSI C63.4:2014	277Vac: Class A
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN 61000-4-5	DM: 6kV,CM: 10kV,Criterion B
	ANSI/C82.77-5-2017	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	DM: 6kV,CM: 6kV,Criterion B

SS-1200VP-GL Integrated Series LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators		Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	
Input-O/P	2U+1000Vac	4U+2000Vac	
Input-Case	2U+1000Vac	2U+1000Vac	
Input-Dim	2U+1000Vac	4U+2000Vac	
Insulation Resistance	$\geq 10\text{M}\Omega$		Input-O/P, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$		25A/1min
Leakage Current	$\leq 0.75\text{mA}$		277Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+ and Vaux-) when Hi-pot test.

Performance Curves:

Input Inrush Current

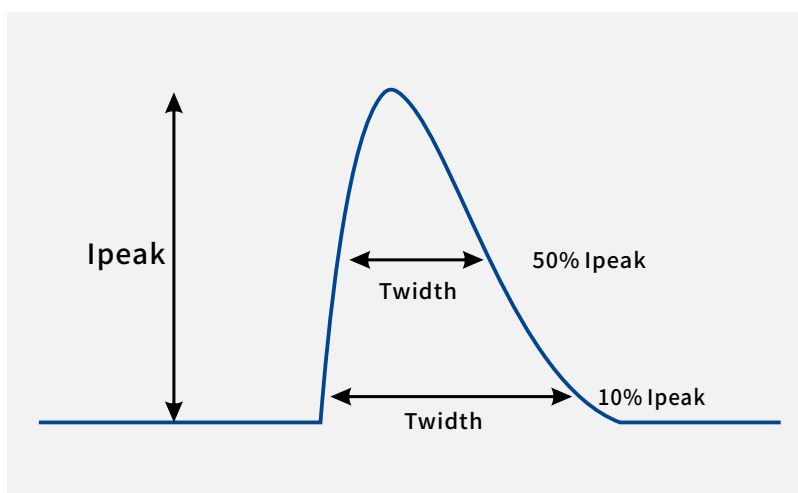


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
230Vac	59A	3mS	2.1mS
277Vac	93A	2.3mS	1.5mS

SS-1200VP-GL Integrated Series LED Driver

Performance Curves(SS-1200VP-GL56BH*):


O/P Voltage Vs. O/P Current(DIM/AOC Window)

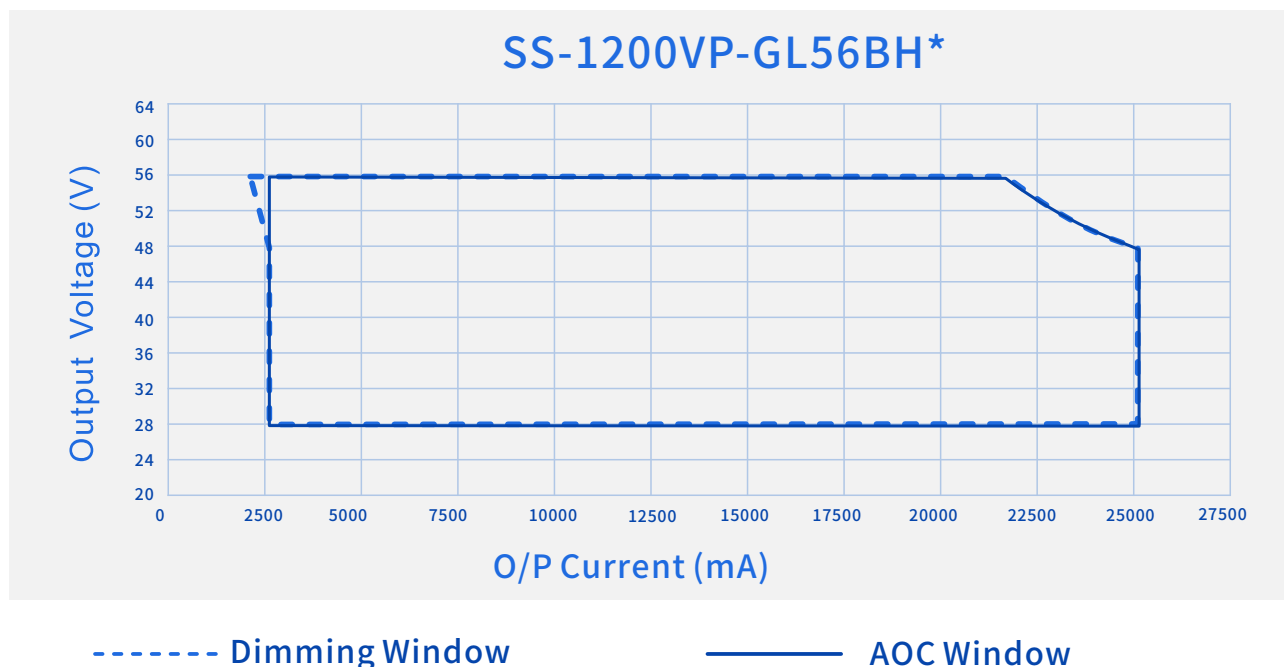

SS-1200VP-GL Integrated Series LED Driver

Performance Curves(SS-1200VP-GL56BH*):


Efficiency Vs. O/P Voltage ($V_{in}=230V_{ac}$)

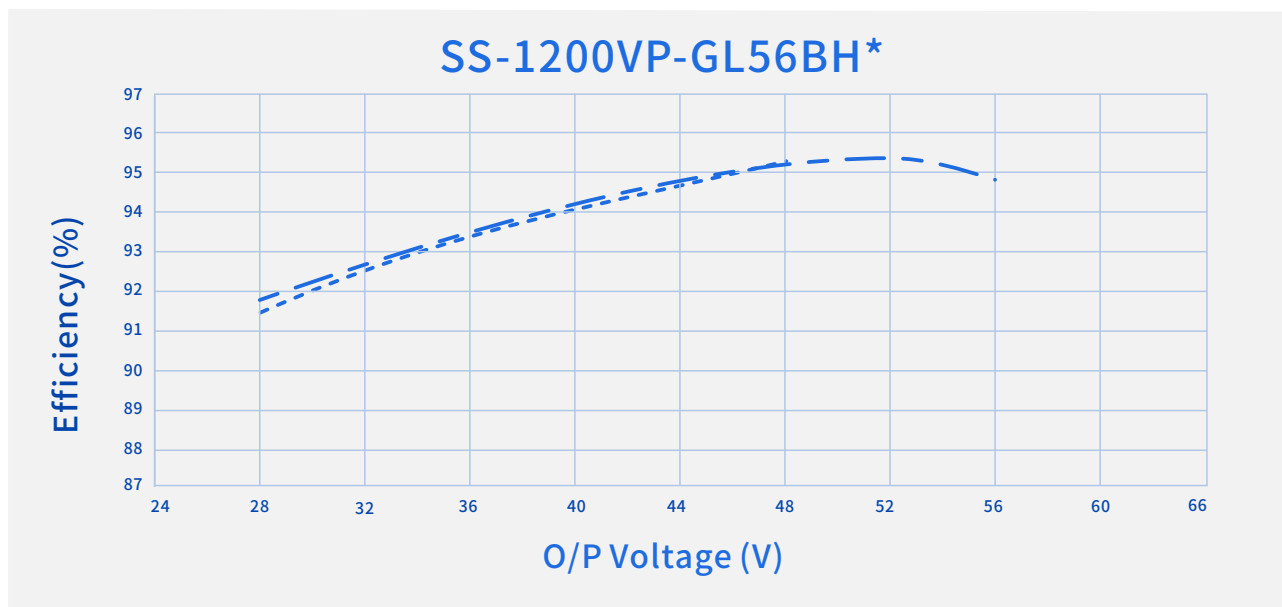

----- $I_o=25000mA$

- . - $I_o=21400mA$

Efficiency Vs. O/P Voltage ($V_{in}=277V_{ac}$)

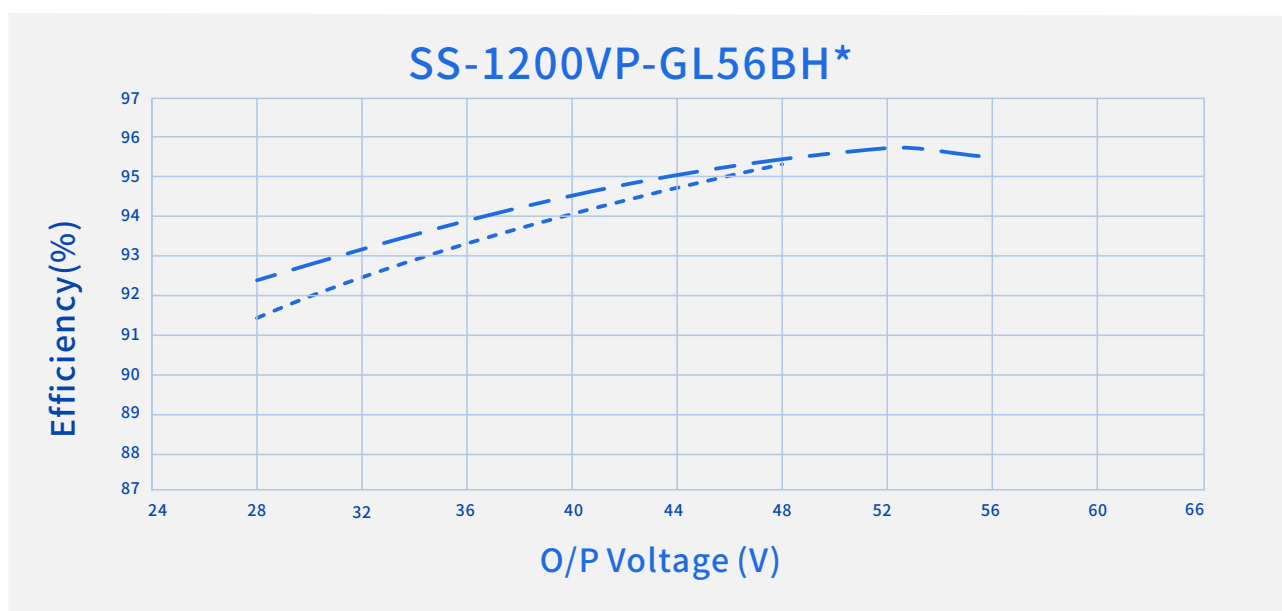


----- $I_o=25000mA$

- . - $I_o=21400mA$


SS-1200VP-GL Integrated Series LED

Performance Curves SS-1200VP-GL56BH

Power Factor Vs. O/P Power

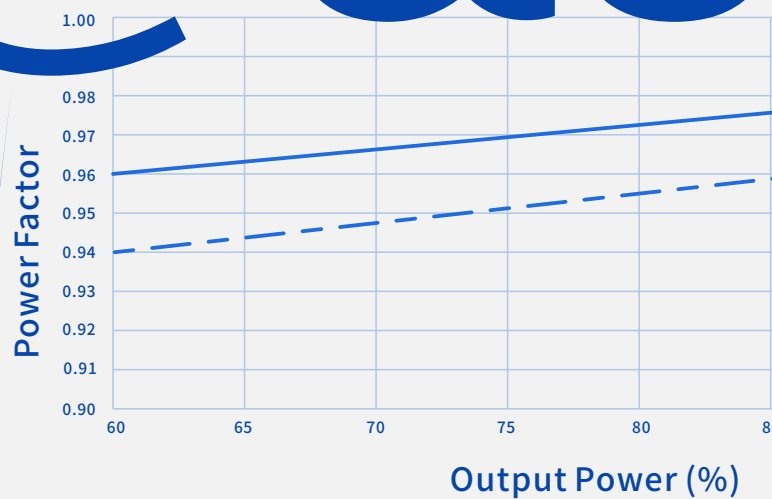


THD Vs. O/P Power

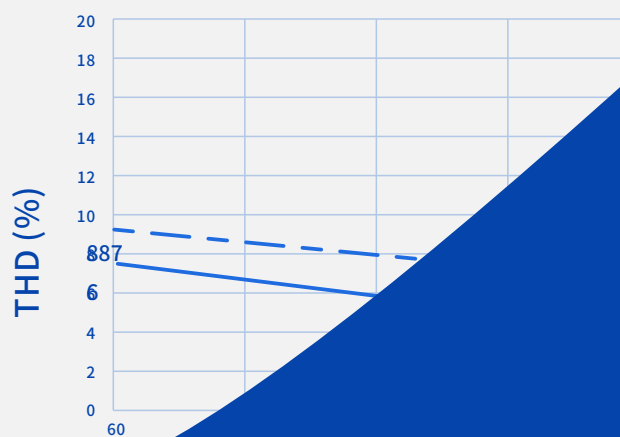


SS-1200VP-GL Integrated Series LED Driver

Performance Curves(SS-1200VP-GL56BH*):


O/P Power Vs. Input Voltage
(Automatic Derating)

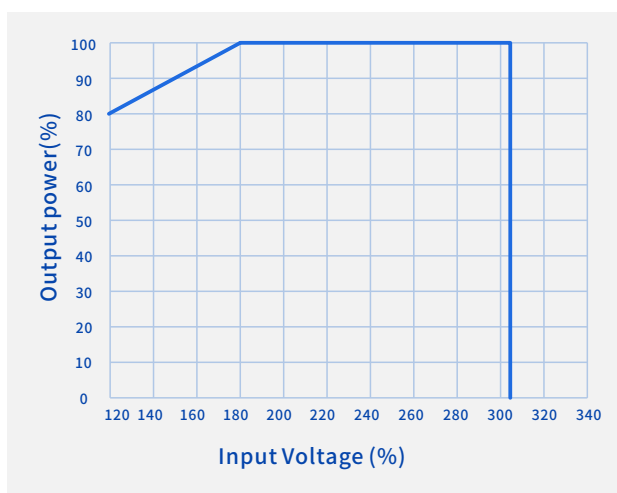


O/P Power Vs. Case Temperature

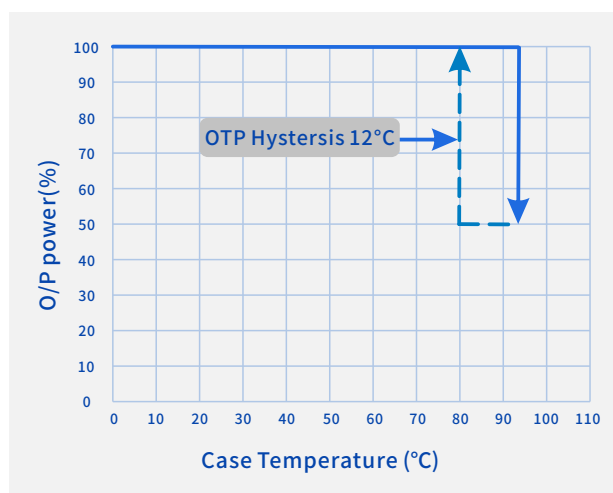

O/P Power Vs. Dimming

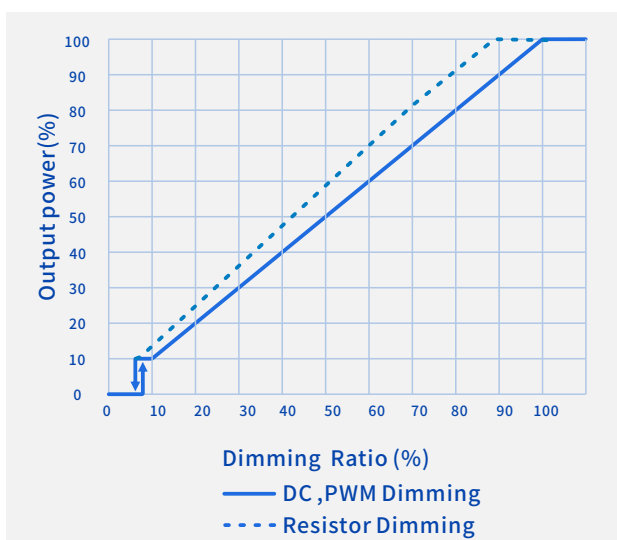

Life Time Vs. Case Temperature

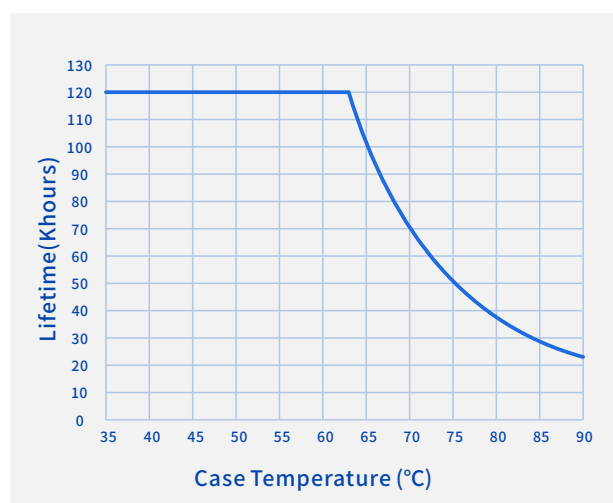

SS-1200VP-GL Integrated Series LED Driver

Constant Lumen Output:


Constant Lumen Output are design to maintain fixture's stable output lumen by increasing driver's output current within driver's life span to counteract LED lumen degradation.

Programming Connection Diagram:

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

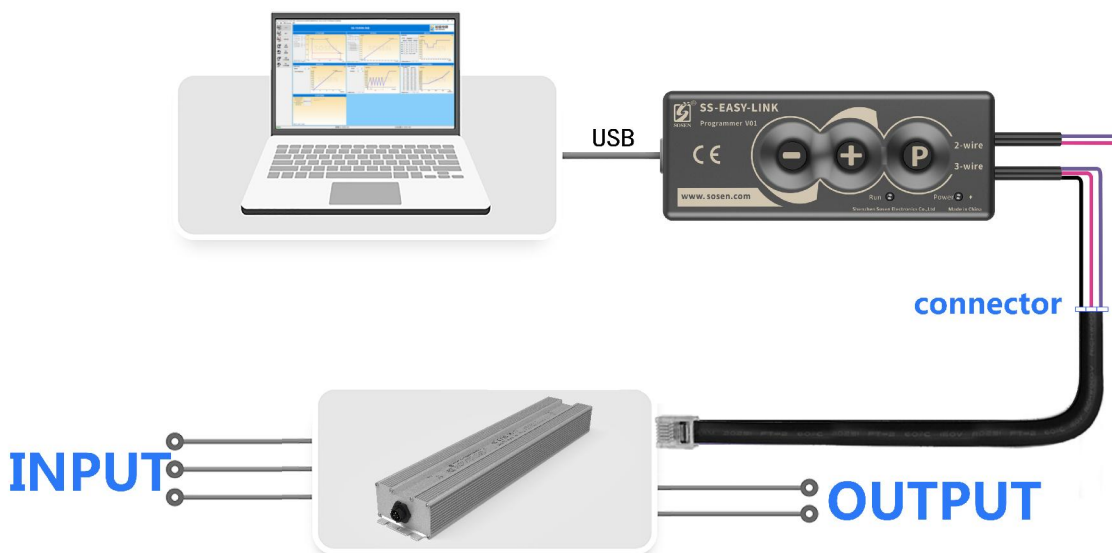

Note:

Programming could be completed by off-line mode either without turn on the Driver nor without PC, other than the traditional on-line mode.


SS-1200VP-GL Integrated Series LED Driver

Parameter			Remark
Default setting	Positive logic dimming (0-10V)	Dimming voltage default 10V (source current)	Factory Default Mode (BH-M4 models)
	Positive logic dimming (0-10V)	Dimming voltage default 0V (sink current)	Factory Default Mode (BHB models)

Note:

Select "Dimming voltage defaults to 10V (source current)" / "Dimming voltage defaults to 0V (sink current)", which needs to be set according to the dimmer used by the end user.

Settings Interface

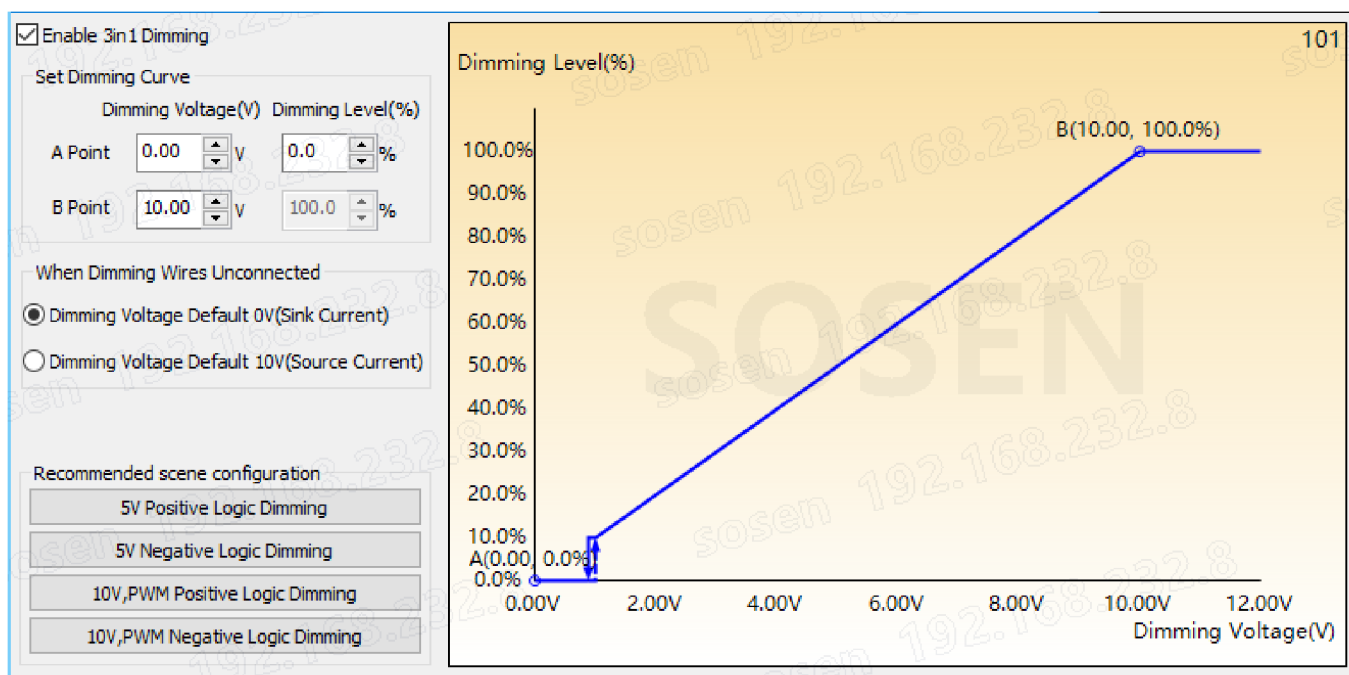

SS-1200VP-GL Integrated Series LED Driver

Mechanical Characteristics (BHB models)

The diagram shows a central blue box labeled "LED DRIVER". On the left, under the heading "INPUT", there are three terminals: "ACL", "ACN", and a ground symbol. On the right, under the heading "OUTPUT", there are six terminals: "V1-/V1+", "V2-/V2+", "Knob Dimmer", "VPP+", "DIM+", and "DIM-/VPP-". The "Knob Dimmer" and "DIM+" terminals are grouped under the heading "Dimming".


AC Input Cable(Exposed Length $450\pm10\text{mm}$):
Global model: SJOW, 3*17AWG, O.D: 8.0mm, Brown: L, Blue: N, Yellow/Green: $\oplus$
UL model: SJTW, 3*16AWG, O.D: 8.5mm, Black:L, White:N, Green: $\oplus$

DC O/P Cable(Exposed Length $250\pm10\text{mm}$):
Global model: SJOW, 2*14AWG, O.D: 8.8mm, Brown: V+, Blue: V-
UL model: SJTW, 2*14AWG, O.D: 9.0mm, Red: V+, Black: V-

DIM/AUX Power/Programming Cable:
Knob Dimmer, RJ25 port

Name Description	Standard Code	mm(In.)
Overall Length	L1	461(18.15)
Mounting Hole Length	L2	447(17.6)
Case Length	L3	436(17.16)
Case Width	W1	89.5(3.52)
Mounting Hole Width	W2	40(1.57)
Case Height	H	49(1.93)
TC Point Position	X	331(13.03)
TC Point Position	Y	50(1.97)

Note:
1, Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

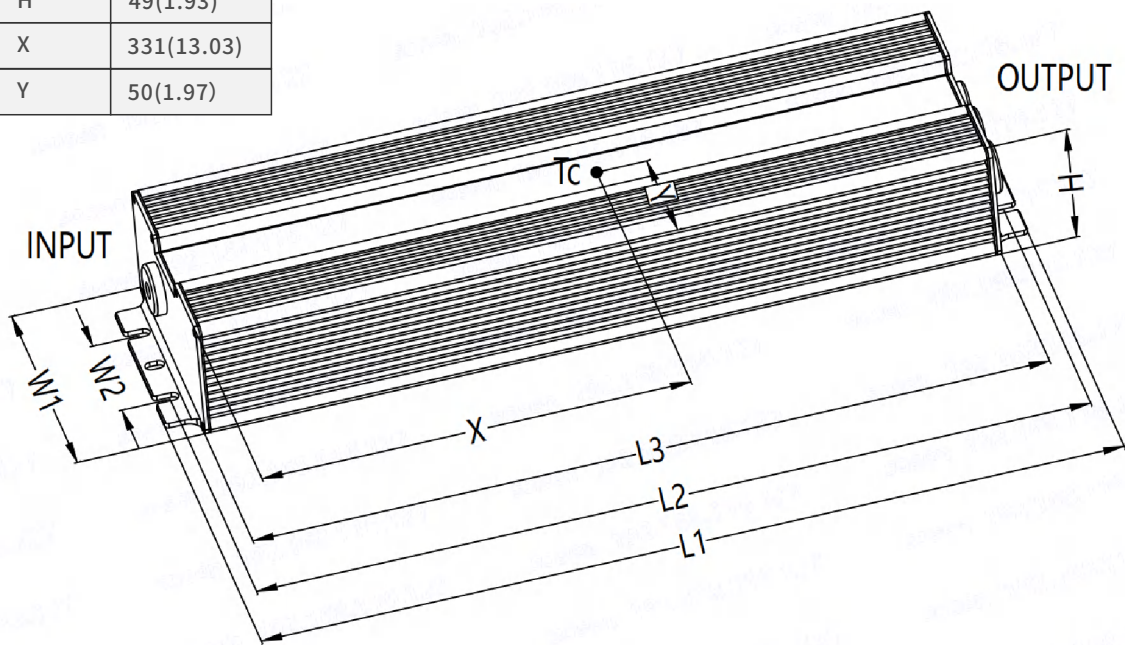

SS-1200VP-GL Integrated Series LED Driver

Mechanical Characteristics (BHB-*models)

INPUT

ACL

ACN

LED DRIVER

OUTPUT

V+

V-

Knob Dimmer

VPP+

DIM+


DIM-/VPP-

Dimming

INPUT	OUTPUT
M19LLT-3Pin	M19LLT-4Pin
M19JNICON-3Pin	M19JNICON-4Pin
	
Dimming : Knob&RJ25	


Name Description	Standard Code	mm(In.)
Overall Length	L1	461(18.15)
Mounting Hole Length	L2	447(17.6)
Case Length	L3	436(17.16)
Case Width	W1	89.5(3.52)
Mounting Hole Width	W2	40(1.57)
Mounting Hole Width	W3	21(0.83)
Case Height	H	49(1.93)
TC Point Position	X	331(13.03)
TC Point Position	Y	50(1.97)

Note:
1,Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

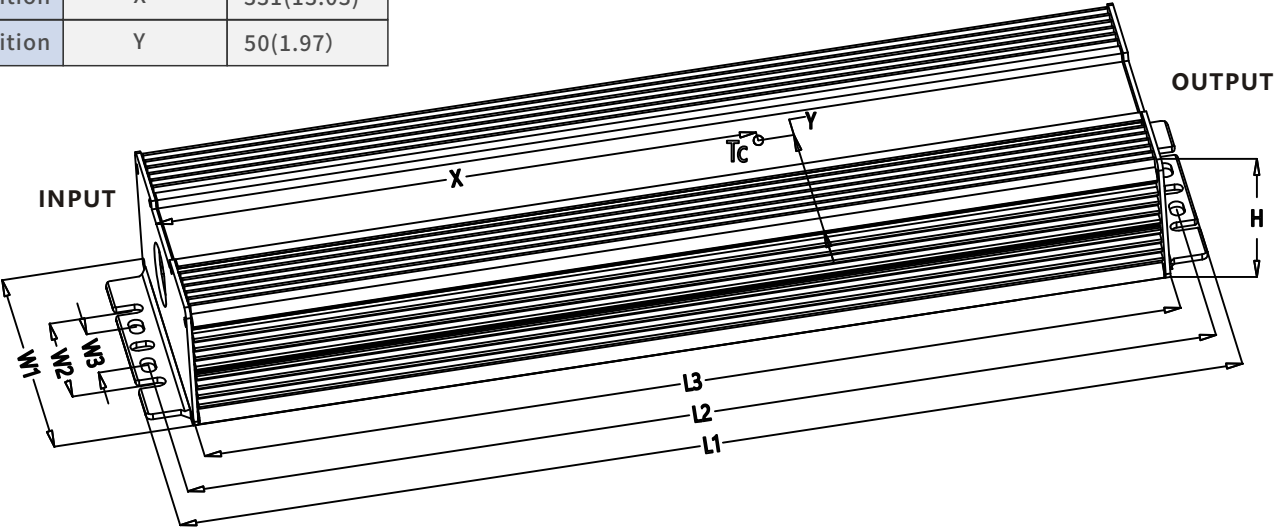


SS-1200VP-GL Integrated Series LED Driver

Knob/RJ25 terminal definition:

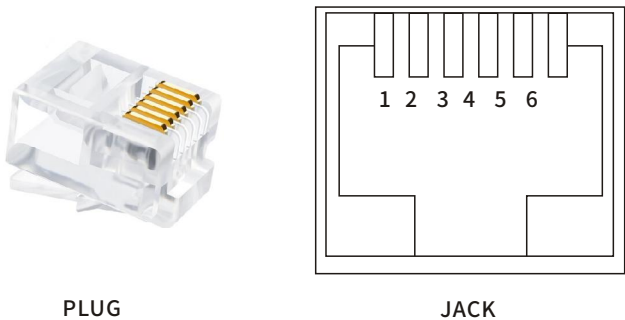

RJ25 PIN	
1&6	VPP+
2&5	DIM+
3&4	DIM-/VPP-

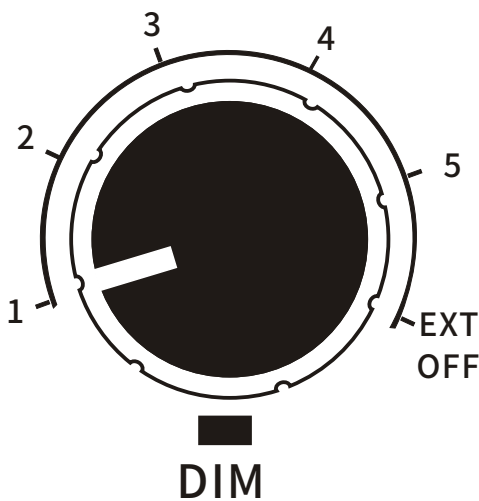

	Definition
1	40%loset
2	50%loset
3	60%loset
4	80%loset
5	100%loset
EXT/OFF	External Dimming /Dim to off

SS-1200VP-GL Integrated Series LED Driver



Assembly Tips

1. When the dimmer line is not in use, please seal the dimmer line connector with an insulating sleeve, so as not to string into the interfering signals resulting in damage to the dimmer line and affecting the normal operation of the power supply.

Package

- Outside carton dimension: $L \times W \times H = 577\text{mm} \times 385\text{mm} \times 162\text{mm}$;
- 5PCS/Carton;
- Net weight/Piece: 3.75kg; Gross weight/Carton: 20kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873—83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2025/04/11	
V01	Update the outer box Dimensions	2025/07/10	