

# **SPECIFICATIONS**

## **SS-1200NP-G360\***


### **CC DRIVER**

Model: SS-1200NP-G360\*

Power: 1200W

Rev.: V00


Release date: 2025-08-13

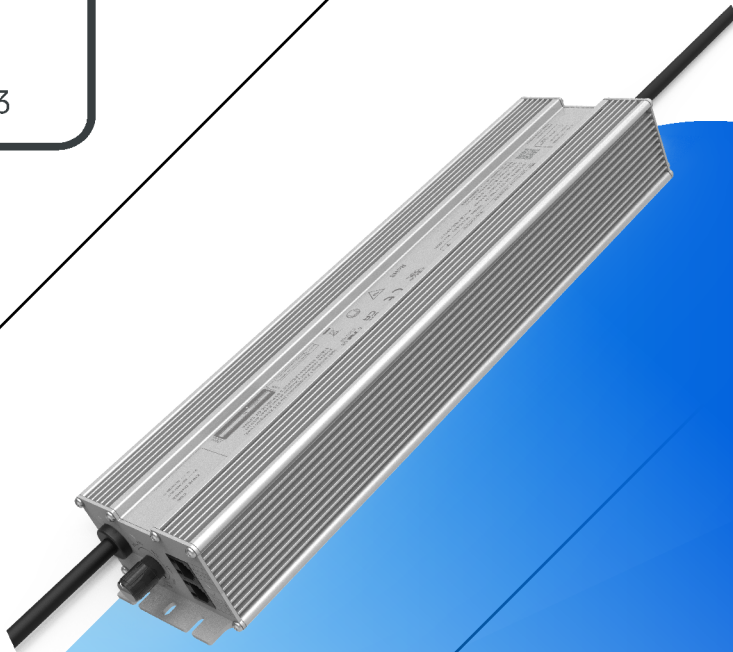

# SS-1200NP-G360XX Series LED Driver

## Features

- Efficiency up to 97%
- Dimming: 0-10V,PWM,Resistor,Timing
- Dim-to-Off
- Dual-live-wire input off without afterglow
- Surge protection: CM: 6kV, DM: 6kV
- AUX Power: 12V/0.25A
- Constant Lumen, Life Warning
- External NTC to Protect LED Module
- Standby Power<0.5W
- Communication with PC
- Protections: SCP/OTP/UVP/OPP
- Warranty: 5 years

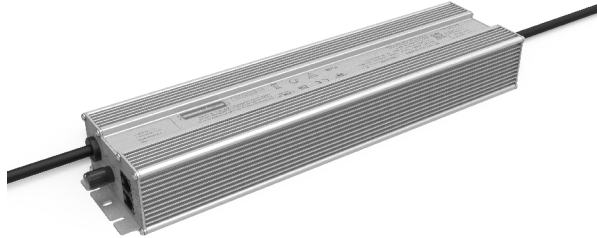

## Description

SS-1200NP-G360XX is 1200W non-isolated constant current LED Driver with 180-305Vac input and wide O/P voltage range and adjustable O/P current by program. LED luminaire manufactures can easily design luminaires and reduce cost.,It has comprehensive protection, including short circuit protection and over-temperature protection.

Applications:

Horticulture lighting, Stadium lighting, Fish lighting

## Model List:

| Model             | AC Input Range | Max. Pout | Vout Range | Full Power Vo Range | Iout     | THD (Typ.) | PF(Typ.) | Eff.(Typ.) | Max.Tc |
|-------------------|----------------|-----------|------------|---------------------|----------|------------|----------|------------|--------|
| SS-1200NP-G360BH* | 180-305Vac     | 1200W     | 210-360V   | 240-360V            | 0.7-5.0A | 10%        | 0.95     | 96%        | 90°C   |

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C;

2. The performance of the LED Driver can be guaranteed within the full power Vo range. The voltage lower than full power Vo range, it is need to test the performance with the LED module ;

# SS-1200NP-G360XX Series LED Driver

## “\*” Means Additional Function

| “*” | AC INPUT |          | DC OUTPUT |          |          |          | Dimming   |          | Remark |
|-----|----------|----------|-----------|----------|----------|----------|-----------|----------|--------|
|     | Cable    | M19-3Pin | Cable     | M19-2Pin | M19-3Pin | M19-4Pin | Knob&RJ25 | M12-3Pin |        |
| BHB | ✓        |          | ✓         |          |          |          | ✓         |          |        |

## Input Characteristics:

| Parameter                  | Min.   | Typ.    | Max.   | Remark                                   |
|----------------------------|--------|---------|--------|--|
| Rated AC Input Range       | 200Vac |         | 277Vac | <Ta:50℃                                  |
| AC Input Range             | 180Vac |         | 305Vac | <180Vac, Automatic Output Power Derating |
| Input Frequency Range      | 47Hz   | 50/60Hz | 63Hz   |  |
| Max Input Current          |        |         | 7.5A   | 200Vac, Full load                        |
| Max Input Power            |        |         | 1300W  | 200Vac, Full load                        |
| Max Inrush Current(200Vac) |        |         | 70A    | Cold start                               |
| Max Inrush Current(277Vac) |        |         | 70A    | Cold start                               |
| Standby Power              |        |         | 0.5W   | 230Vac/50Hz, Dim-off                     |
| Power Factor               | 0.95   | 0.97    |        | 220Vac/50Hz, Full load                   |
|                            | 0.90   |         |        | 200-277Vac, 70-100% load                 |
| THD                        |        | 10%     |        | 220Vac/50Hz, Full load                   |
|                            |        |         | 20%    | 200-277Vac, 70-100% load                 |

# SS-1200NP-G360XX Series LED Driver

## O/P Characteristics:

| Parameter                    | Min.      | Typ.  | Max.      | Remark  |
|------------------------------|-----------|-------|-----------|---|
| O/P Voltage Range            | 210V      |       | 360V      | Power derated @210-240V   |
| Rated O/P Voltage            | 240V      |       | 360V      | $P_o = V_o \cdot I_o = 1200W$ , Full load   |
| Rated O/P Current            | 3.33A     |       | 5.0A      | 5.0A for 240V, 3.33A for 360V   |
| Adj. O/P Current (AOC) Range | 0.7A      |       | 5.0A      | Adjustable by program   |
| No Load Voltage              |           |       | 390V      |   |
| Efficiency @220Vac           | 94.0%     | 96.0% |           | O/P 360V/3.33A  |
| Efficiency @277Vac           | 95.0%     | 97.0% |           | O/P 360V/3.33A  |
| O/P Current Tolerance        | -5%       |       | +5%       |   |
| O/P Current Ripple(PK-AV)    |           | 5%    | 10%       | Full load   |
| Start-up Current Overshoot   |           |       | 10%       | Full load   |
| Start-up Time                |           |       | 0.5S      | 200-277Vac, Full load,  |
| Line Regulation              | -2%       |       | +2%       | Full load   |
| Load Regulation              | -2%       |       | +2%       | -40°C, $\pm 5\%$  |
| Temperature Coefficient      | -0.03%/°C |       | +0.03%/°C | T <sub>c</sub> : 0°C~90°C   |
| OTP                          | 90°C      | 95°C  | 110°C     | Drop current when OTP, and it can be automatically restored after the abnormality is removed. |
| Short Circuit Protection     |           |       |           | Driver will not be damaged, Constant current mode   |

# SS-1200NP-G360XX Series LED Driver

## Other Characteristics:

| Parameter                   |               | Min.                | Typ. | Max.      | Remark  |
|-----------------------------|---------------|---------------------|------|-----------|---|
| AUX Power                   | O/P Voltage   | 10.8V               | 12V  | 13.8V     |   |
|                             | O/P Current   |                     |      | 250mA     |   |
| 0-10V Dimming (Optional)    | Dim Vmax      | 0V                  |      | 12V       | Dimming prohibits reverse connection.<br>DIM+ source current 110uA .  |
|                             | Dim Range     | 10%loset            |      | 100%loset |   |
|                             | Rec.Dim Range | 0V                  |      | 10V       |   |
| PWM Dimming (Optional)      | PWM High      | 9.8V                |      | 10.2V     |   |
|                             | PWM Low       | 0V                  |      | 0.3V      | DIM+ source current 110uA .   |
|                             | Frequency     | 1KHz                |      | 2KHz      | Dimming prohibits reverse connection.   |
|                             | PWM Duty      | 0%                  |      | 100%      |   |
| Resistor Dimming (Optional) | Resistance    | 0Kohm               |      | 100Kohm   |   |
|                             | Dim Range     | 10%loset            |      | 100%loset | DIM+ source current 110uA .   |
| 0-10V Dim to Off            | Dim off       | 7%                  | 8%   | 9%        | By DC voltage, PWM, resistance dimming ratio  |
|                             | Dim on        | 8%                  | 9%   | 10%       | By DC voltage, PWM, resistance dimming ratio  |
| NTC Founction(Optional)     |               | By programming      |      |           | External resistance value 10K $\Omega$ , B value 3950 or 3435 NTC thermistor, set parameters through corresponding programs |
| Timing Curve(Optional)      |               | By programming      |      |           | Set by program  |
| Constant Lumen(Optional)    |               | By programming      |      |           | Set by program  |
| Life Warning(Optional)      |               | By programming      |      |           | Set by program  |
| Life Time(Tc $\leq$ 75°C)   |               | 50,000 hours        |      |           | 80% Load, 230Vac  |
| MTBF                        |               | 198,800 hours       |      |           | 220Vac,Full load, Ta=25°C (MIL-HDBK-217F)   |
| Tc                          |               | 90°C                |      |           |   |
| Warranty                    |               | 5 years             |      |           | Tc 75°C   |
| Net Weight                  |               | 2.95Kg              |      |           |   |
| Dimension                   |               | 365mm*89.5mm*49.0mm |      |           | L x W x H   |

NOTE: 1.All the parameters above are tested Ta 25°C and LED load, unless specified.

2. When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value:  $91\text{K}\Omega/\text{N}$ .

# SS-1200NP-G360XX Series LED Driver

## Environmental Requirements

| Parameter                    | Min.  | Typ. | Max.  | Remark |
|------------------------------|-------|------|-------|--------|
| Operating Temperature(Tcase) | -40℃  | 25℃  | +90℃  |        |
| Storage Temperature          | -40℃  | 25℃  | +90℃  |        |
| Operation Humidity           | 10%RH |      | 90%RH |        |
| Storage Humidity             | 5%RH  |      | 95%RH |        |
| Altitude                     | -65m  |      | 4000m |        |

## Safety and EMI/EMS Standards

| Certification | Standard  | Status | Remark                    |
|---------------|---|--------|---------------------------|
| UL            | UL8750  | ✓      |                           |
| CUL           | CAN/CSA C22.2 No.250.13   | ✓      |                           |
| ENEC          | EN 61347-1<br>EN 61347-2-13<br>EN IEC 62384                                       | ✓      |                           |
| RCM           | AS/NZS61347.2.13  |        |                           |
| CCC           | GB/T 19510.1<br>GB/T 19510.213  |        |                           |
| CE            | EN 61347-1<br>EN 61347-2-13<br>EN 62493   | ✓      |                           |
|               | EN 301 489-1<br>EN 301 489-3<br>EN 300 330<br>EN 62479/EN 50663/EN 50665/EN 50364 |        | For NFC wireless products |

# SS-1200NP-G360XX Series LED Driver

## Safety and EMI/EMS Standards

| EMI/EMS                    | Standard                         | Status | Remark                      |
|----------------------------|----------------------------------|--------|-----------------------------|
| Conduction Emission        | EN IEC 55015                     | ✓      | 230Vac                      |
|                            | GB/T 17743                       |        |                             |
|                            | FCC Part 15 Subpart B;ANSI C63.4 |        |                             |
| Radiation Emission         | EN IEC 55015                     | ✓      | 230Vac                      |
|                            | GB/T 17743                       |        |                             |
|                            | FCC Part 15 Subpart B;ANSI C63.4 |        |                             |
| Harmonic Current Emissions | EN IEC 61000-3-2                 | ✓      | ClassC                      |
|                            | GB 17625.1                       |        | ClassC                      |
| Surge                      | IEC/EN61000-4-5                  | ✓      | DM: 6kV,CM: 6kV,Criterion B |
|                            | ANSI/C82.77-5                    |        |                             |
| Ring Wave                  | IEC/EN 61000-4-12                | ✓      | DM: 6kV,CM: 6kV,Criterion B |
|                            | ANSI/C82.77-5                    |        |                             |

# SS-1200NP-G360XX Series LED Driver

## Safety Test Items:


| Safety Test Items       | Technical Indicators       |                              | Remark                          |
|-------------------------|----------------------------|------------------------------|---------------------------------|
| Insulation Requirements | UL Insulation Requirements | ENEC Insulation Requirements |                                 |
| Input-Case              | 2U+1000                    | 2U+1000                      | Basic insulation                |
| Input-Dim               | 2U+1000                    | 4U+2000                      | Reinforced insulation           |
| Dim-Case                | 500Vac                     | 500Vac                       | Basic insulation                |
| Insulation Resistance   | $\geq 10M\Omega$           |                              | Input-DIM, Test voltage: 500Vdc |
| Ground Resistance       | $\leq 0.1\Omega$           |                              | 25A/1min                        |
| Leakage Current         | $\leq 0.75mA$              |                              | 277Vac                          |

### NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+ ) when Hi-pot test (Turn off ARC) .
3. When applying withstand voltage to ground, the input and output lines need to be short-circuited together.

## Performance Curves:

### Input Inrush Current

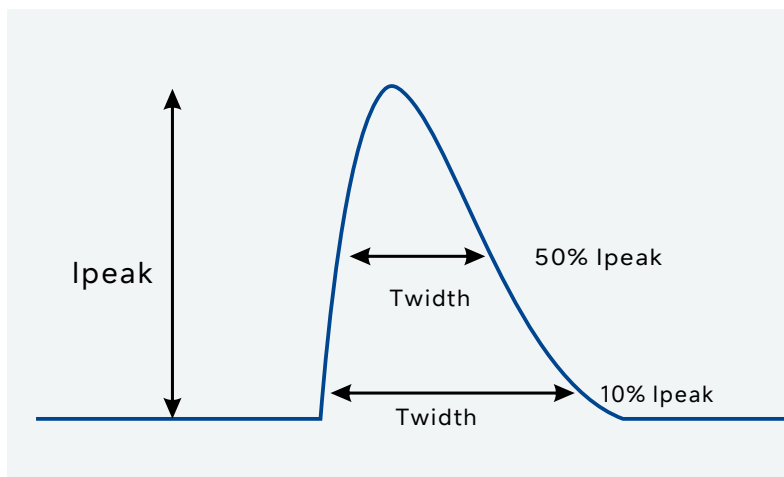

| Vin    | Ipeak | T(@10% of Ipeak) | T(@50% of Ipeak) |
|--------|-------|------------------|------------------|
| 200Vac | 70A   | 10.3ms           | 3.7ms            |
| 277Vac | 70A   | 11.4ms           | 3.5ms            |







# SS-1200NP-G360XX Series LED Driver

## Performance Curves:

Efficiency Vs. O/P Voltage (Vin=200Vac)

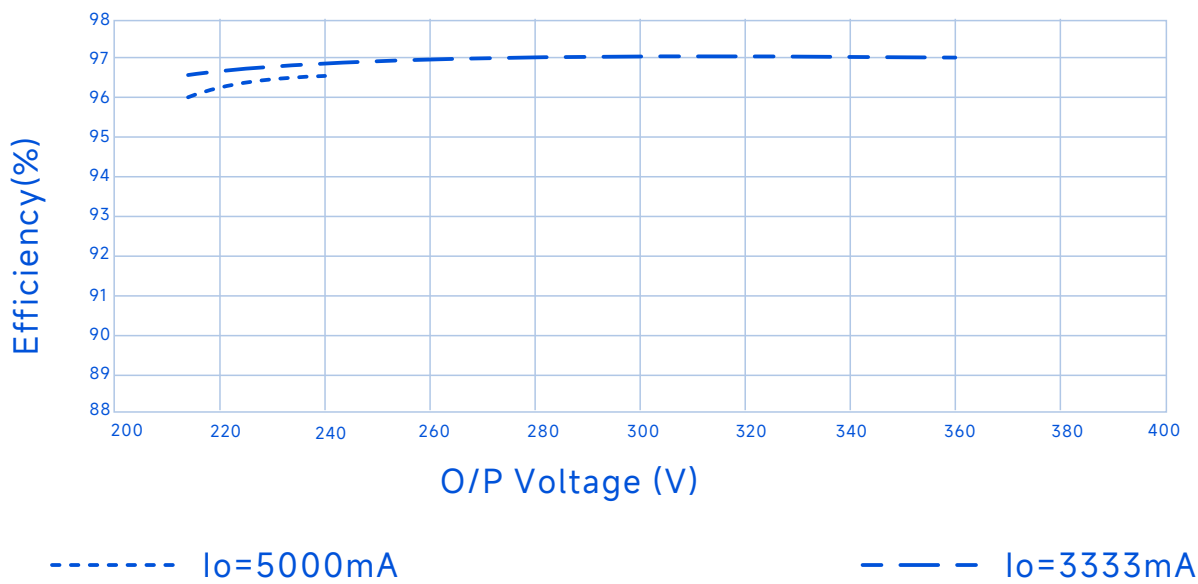


Efficiency Vs. O/P Voltage (Vin=277Vac)

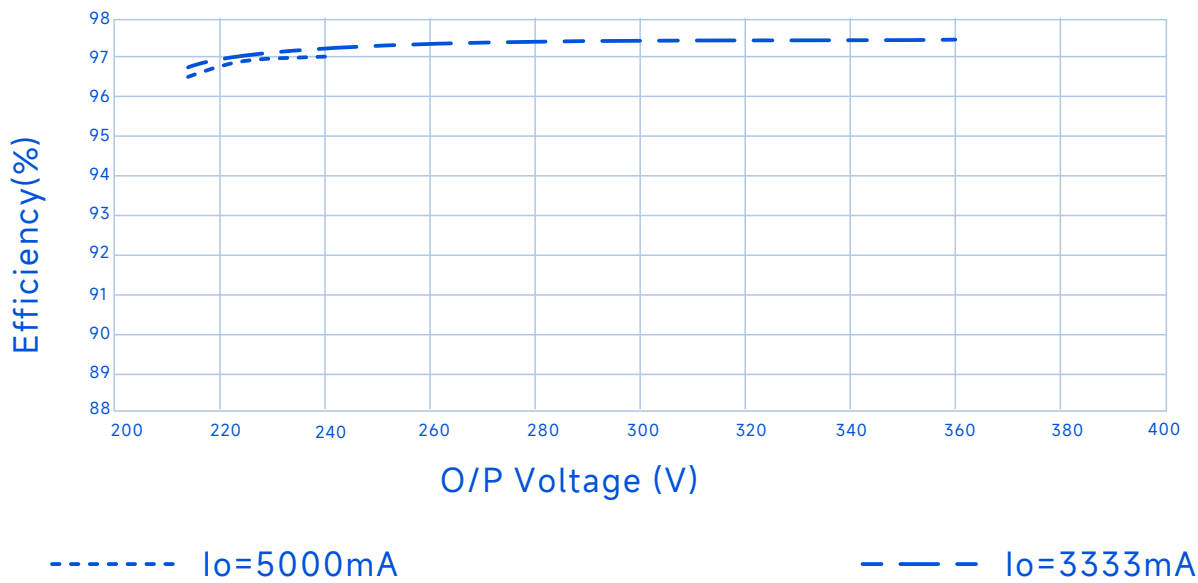


# SS-1200NP-G360XX Series LED Driver

## Performance Curves:

Power Factor Vs. O/P Power

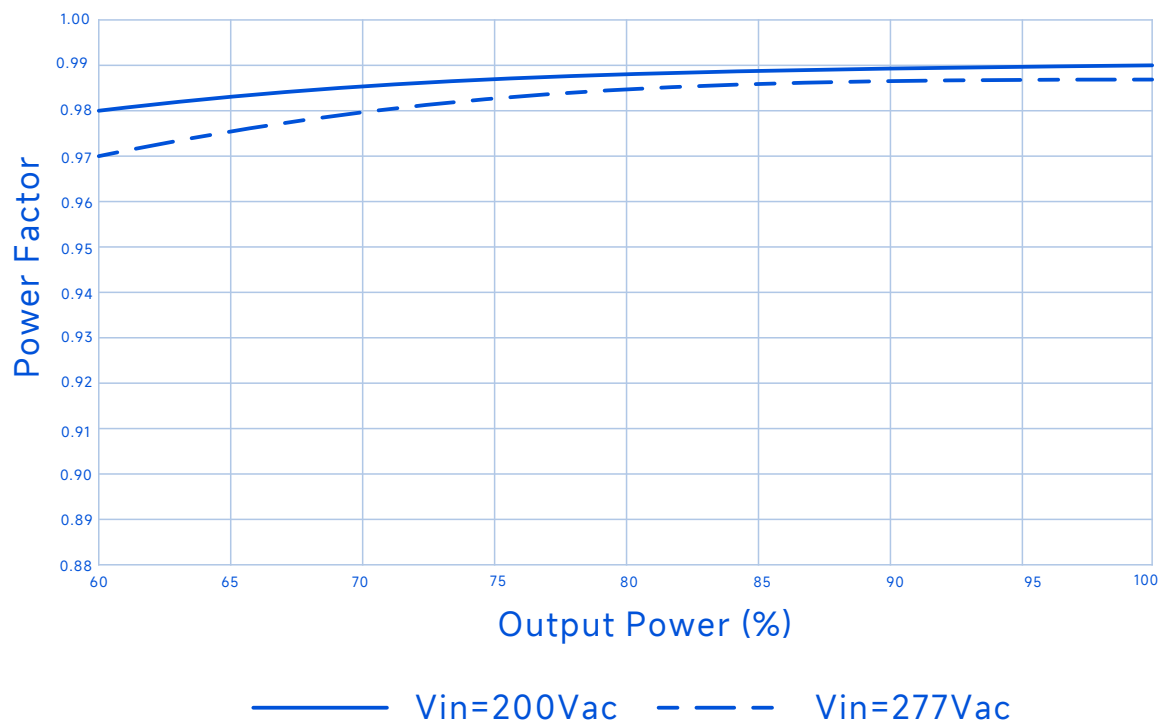


THD Vs. O/P Power

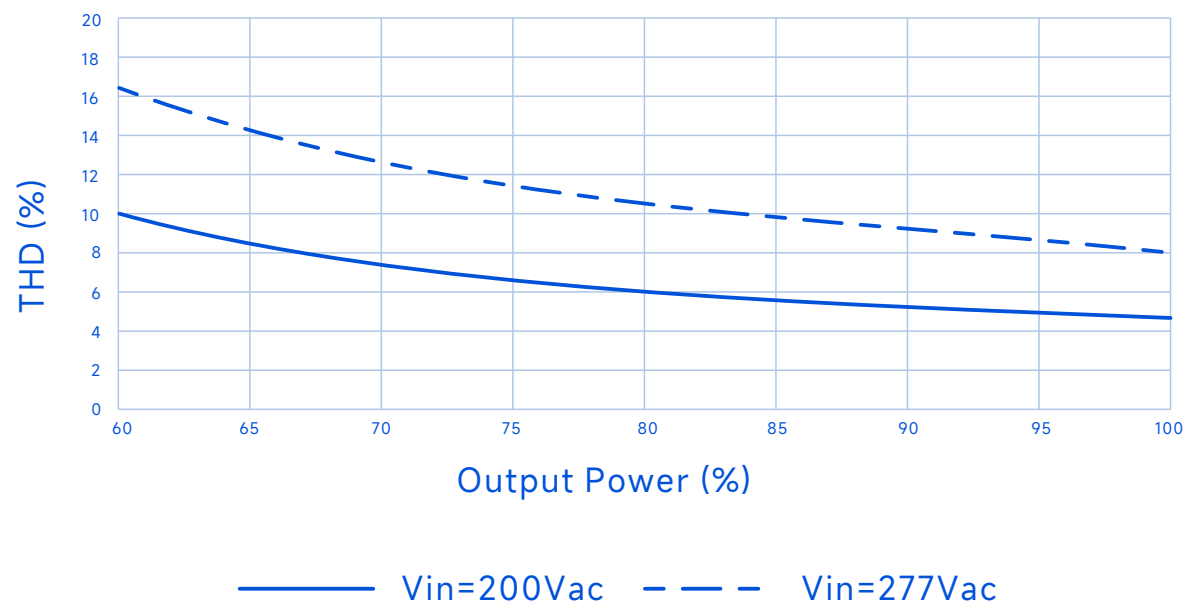


# SS-1200NP-G360XX Series LED Driver

## Performance Curves:


O/P Power Vs. Input Voltage

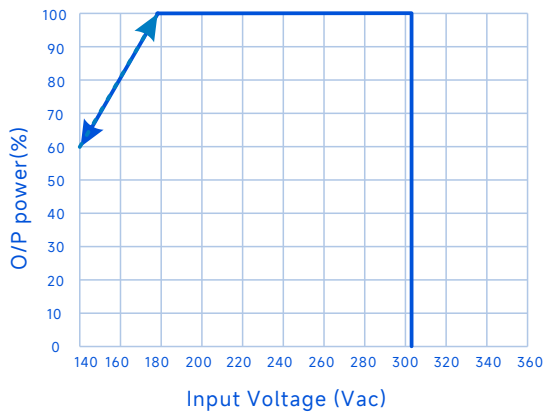


O/P Power Vs. Dimming

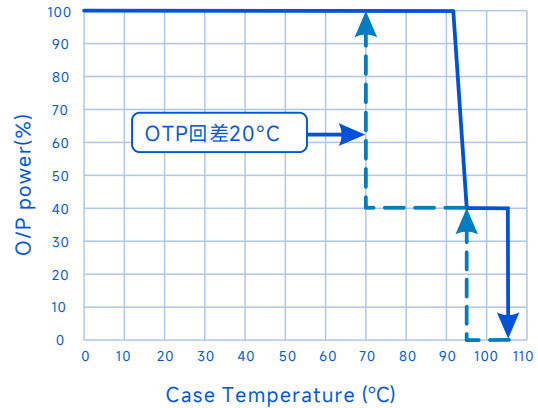

O/P Power Vs. Dimming

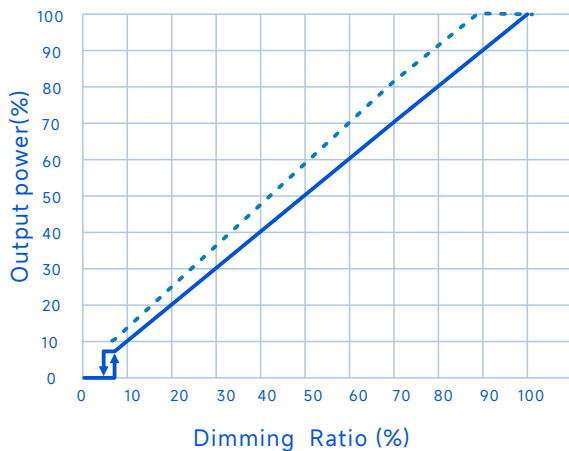

Life Time Vs. Case Temperature

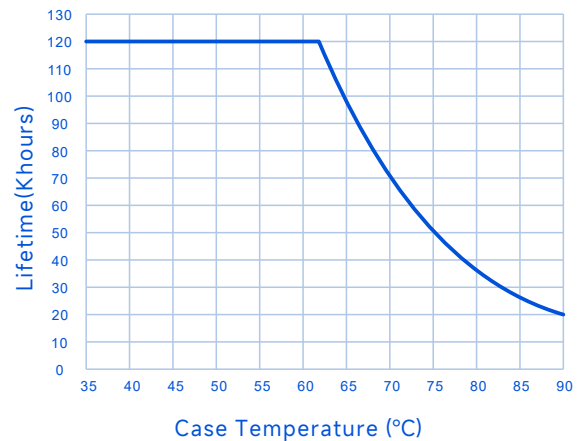


- 0-10V, 0-5V, PWM
- - 10-0V, 5-0V
- .... Resistor Dimming(100KΩ)

## Programming connection diagram

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

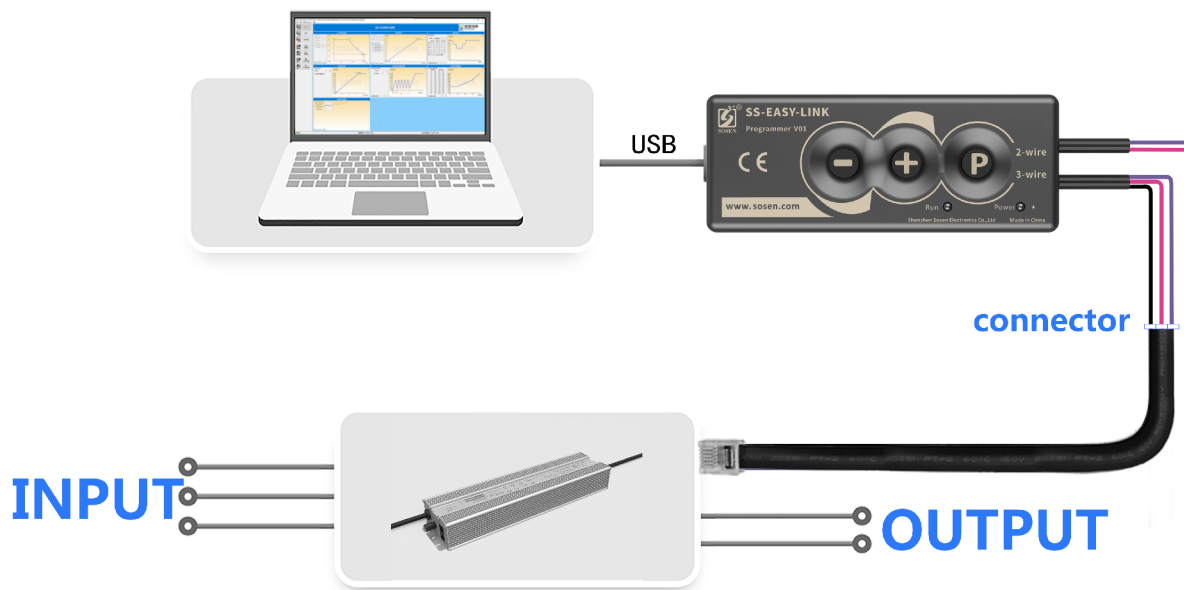

### Note:

1. During the programming process, all programming functions can be realized without powering on the driver.
2. All programming functions can be realized without powering off the drive that is currently in use.
3. It can be disconnected from the PC and offline programming can be implemented.

## Constant Lumen Output

Constant Lumen Output are design to maintain fixture's stable output lumen by increasing driver's output current within driver's life span to counteract LED lumen degradation.


# SS-1200NP-G360XX Series LED Driver

| Parameter                 |                                |  | Remark   |
|---------------------------|--------------------------------|--|--|
| Default setting           | Positive logic dimming (0-10V) | Dimming voltage default 10V (source current) |  |
| Dimming optional function | Positive logic dimming (0-10V) | Dimming voltage default 0V (sink current)    | When the dimming wire is not connected, the LED driver output is the minimum (to be noted in the order)                                |
|                           |                                | Resistance dimming not available             | For parallel dimming applications with multiple LED drivers, it is recommended to use the sink current mode (to be noted in the order) |

Note:

Select "Dimming voltage defaults to 10V (source current)" / "Dimming voltage defaults to 0V (sink current)", which needs to be set according to the dimmer used by the end user.

## Settings Interface

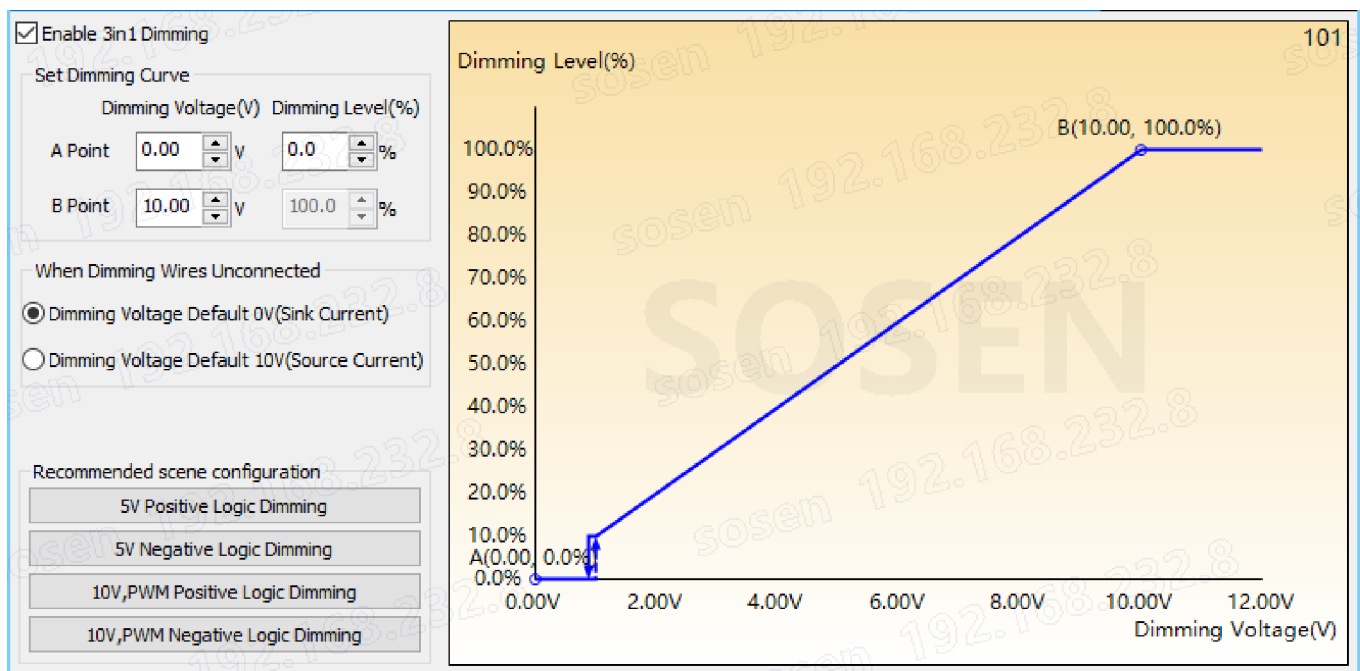

# SS-1200NP-G360XX Series LED Driver

## Mechanical Characteristics

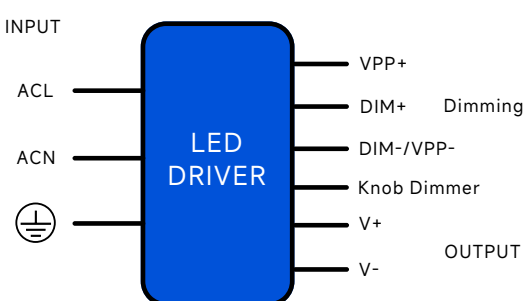


Diagram of the LED DRIVER showing input and output pins. INPUT pins: ACL, ACN, and a ground symbol. OUTPUT pins: VPP+, DIM+ (Dimming), DIM-/VPP-, Knob Dimmer, V+, and V-.

**AC Input Cable(Exposed Length 450±10mm):**  
Global model: SJOW,3\*17AWG,O.D: 9.8mm,Brown:L,Blue:N,Yellow/Green: ⊕

**DC O/P Cable(Exposed Length 250±10mm):**  
Global model: SJOW,2\*17AWG,O.D: 9.3mm,Brown:V+ Blue:V-


**DIM/AUX Power/Programming/NTC Cable:**  
Knob&RJ25

| Name Description     | Standard Code | mm(In.)    |
|----------------------|---------------|------------|
| Overall Length       | L1            | 365(14.37) |
| Mounting Hole Length | L2            | 349(13.74) |
| Case Length          | L3            | 339(13.34) |
| Case Width           | W1            | 89.5(3.52) |
| Mounting Hole Width  | W2            | 40(1.57)   |
| Case Height          | H             | 49(1.93)   |
| TC Point Position    | X             | 125(4.92)  |
| TC Point Position    | Y             | 18(0.71)   |

Note

1.Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

2.AC Input Cable,DC O/P Cable Peeled length of cable:43±5mm  
Tinned length of wire:10±2mm.

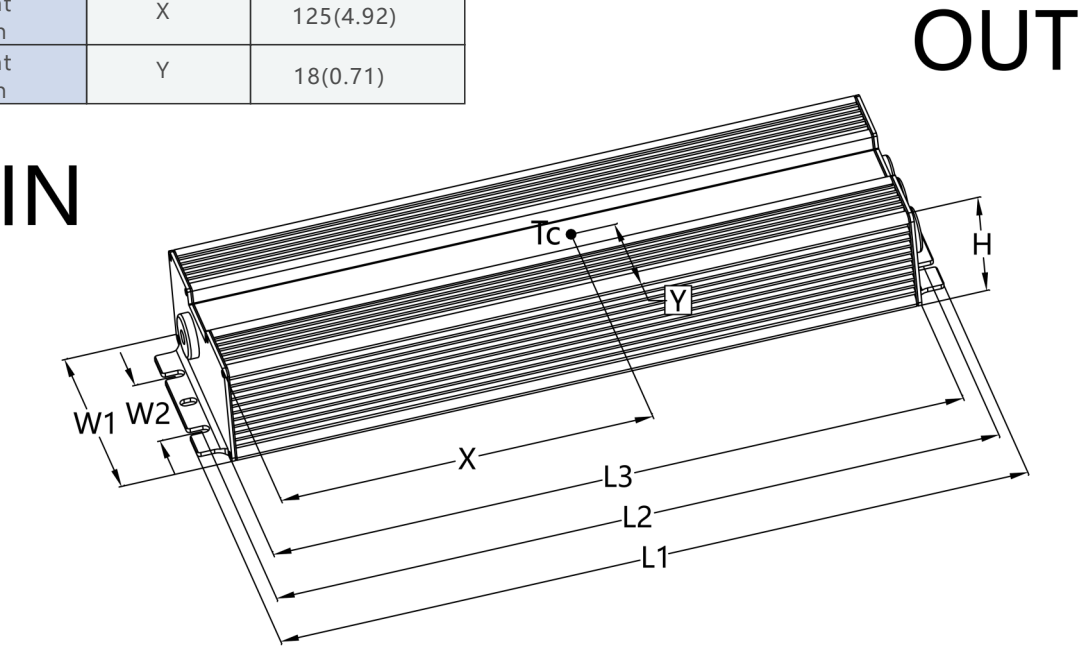


# SS-1200NP-G360XX Series LED Driver

## Knob/RJ25 terminal definition:




PLUG



JACK

| RJ25 PIN | 定义        |
|----------|-----------|
| 1&6      | VPP+      |
| 2&5      | DIM+      |
| 3&4      | DIM-/VPP- |

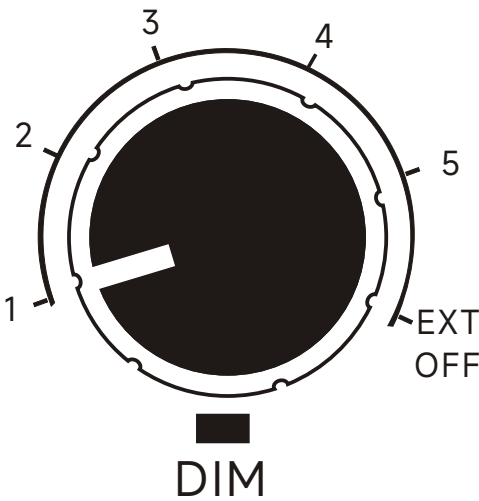

| 开关      | 定义                           |
|---------|------------------------------|
| 1       | 40%loset                     |
| 2       | 50%loset                     |
| 3       | 60%loset                     |
| 4       | 80%loset                     |
| 5       | 100%loset                    |
| EXT/OFF | External Dimming /Dim to off |



# SS-1200NP-G360XX Series LED Driver



## Assembly Tips

1. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.
2. Safety space between aluminum base and LED coppers  $>5.6\text{mm}$ .
3. Safety space/coppers between LED+ and LED-  $\geq 3.6\text{mm}$ .
4. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
5. It is recommended to design LED beads in parallel first and then in series.
6. The insulation level of LED light panels should meet the reliability design requirements.
7. It's recommended to add resistors or capacitors in parallel with the LED on PCB to reduce the risk of surge when a non isolated LED driver is used for the luminaire
8. For other precautions, please refer to the "LED Driver User Manual".

## Package

- Outside carton dimension:  $L \times W \times H = 495\text{mm} \times 385\text{mm} \times 162\text{mm}$ ;
- 5 PCS/Carton;
- Net weight/Piece: 2.95kg; Gross weight/Carton: 16.12kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873—83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

| Version | Description of Update | Updated Date | Remark |
|---------|-----------------------|--------------|--------|
| V00     | Original Release      | 2025/08/13   |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |