

SOSEN LED Driver, Your Smart Choice

Specifications

SS-75GA-E Series LED Driver

Model: SS-75GA-EXXX*

Description: 75W LED Driver

Rev.: V03

Release Date: 2024-12-23

SS-75GA-E Series LED Driver

SOSEN
LED DRIVER



LED DRIVER

GA-E Series



RoHS IP66 IP67

Features:

- Efficiency up to 90%
- Output current adjustment method:
 - NFC programming (D/DE models)
 - Dimmer line programming (B/BE models)
- Isolated dimming: DALI-2, 0-10V, PWM, Resistor
- DALI-2 certification (Part 251, 252, 253)
- TIM, ELA, CLO
- Suitable for Class I / II lamps
- Protections: SCP/OTP/OVP/OPP
- Surge protection: CM: 10kV, DM: 6kV
- IP66/IP67
- Warranty: 5 years

Description:

GA-E Series are constant current LED Driver with wide O/P voltage range and adjustable O/P current by program. LED luminaries manufactures can easily design luminaries and reduce cost.

Applications:

High Pole lighting, High bay lighting, Stadium lighting, Plant lighting, Fish lighting, Street lighting, Tunnel lighting, Stage lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	Default Current	THD (Typ.)	PF (Typ.)	Eff. (Typ.)	Max.Tc
SS-75GA-E62*	100-305Vac	75W	30-62V	35-62V	0.35-2.1A	1.56A	8%	0.97	88%	90°C
SS-75GA-E108*	100-305Vac	75W	54-108V	71-108V	0.1-1.05A	0.7A	8%	0.97	89%	90°C
SS-75GA-E143*	100-305Vac	75W	72-143V	108-143V	0.1-0.7A	0.53A	8%	0.97	89%	90°C

Note:

- 1.Default Tested: at 220Vac, full load, Ta 25°C.
- 2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module.

SS-75GA-E Series LED Driver

“★” Means Additional Function

Suffix	0-10V/PWM /Resistor Or 10-0V (suffix:B)	DALI (suffix:D)	NFC	Class I	Class II	Remark
B	✓			✓		
BE	✓				✓	
D		✓	✓	✓		
DE		✓	✓		✓	

Model	Suffix:B	Suffix:BE	Suffix:D	Suffix:DE
SS-75GA-E62★	✓	✓	✓	✓
SS-75GA-E108★	✓	✓	✓	✓
SS-75GA-E143★	✓	✓		

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
AC Input Range	100Vac	220-240Vac	305Vac	Reference Derating Curve
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			0.5A	220Vac, Full load
Max Input Power			90W	220Vac, Full load
Max Inrush Current(220Vac)			45A	Cold start
No Load Power			7.5W	220Vac/50Hz, No load
Standby input Power			0.5W	D/DE models 220Vac/50Hz , Dimmer off
Power Factor	0.95	0.97		220Vac/50Hz, Full load
	0.90			220-277Vac, 70-100% load
THD		8%	12%	220Vac/50Hz, Full load
			20%	220-277Vac, 70-100% load

SS-75GA-E Series LED Driver

Output Characteristics(SS-75GA-E62*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	30V		62V	Power derated @30-35V
Rated O/P Voltage	35V		62V	$P_o = V_o \cdot I_o = 75W$, Full load
Rated O/P Current	1.2A		2.1A	2.1A for 35V, 1.2A for 62V
Adj. O/P Current (AOC) Range	0.35A		2.1A	
No Load Voltage			80V	
Efficiency @220Vac	86.0%	88.0%		Output 62V/1.2A, Test after burn-in
Efficiency @277Vac	86.5%	88.5%		Output 62V/1.2A, Test after burn-in
O/P Current Tolerance	-5%		+5%	Full load
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	B/BE model, 220Vac, Full load
			0.8S	D/DE model, 220Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-5%		+5%	
Temperature Coefficient		0.05%/°C		Tc:0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged

SS-75GA-E Series LED Driver

Output Characteristics(SS-75GA-E108*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	54V		108V	Power derated @54-71V
Rated O/P Voltage	71V		108V	$P_o = V_o \cdot I_o = 75W$, Full load
Rated O/P Current	0.7A		1.05A	1.05A for 71V, 0.7A for 108V
Adj. O/P Current (AOC) Range	0.1A		1.05A	
No Load Voltage			140V	
Efficiency @220Vac	87.0%	89.0%		Output 108V/0.7A, Test after burn-in
Efficiency @277Vac	88.0%	90.0%		Output 108V/0.7A, Test after burn-in
O/P Current Tolerance	-5%		+5%	Full load
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	B/BE models 220Vac, Full load
			0.8S	D/DE models 220Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-5%		+5%	
Temperature Coefficient		0.05%/°C		Tc:0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged

SS-75GA-E Series LED Driver

Output Characteristics(SS-75GA-E143*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	72V		143V	Power derated @72-108V
Rated O/P Voltage	108V		143V	$P_o = V_o \cdot I_o = 75W$, Full load
Rated O/P Current	0.53A		0.7A	0.7A for 108V, 0.53A for 143V
Adj. O/P Current (AOC) Range	0.1A		0.7A	
No Load Voltage			180V	
Efficiency @220Vac	87.0%	89.0%		Output 143V/0.53A, Test after burn-in
Efficiency @277Vac	88.0%	90.0%		Output 143V/0.53A, Test after burn-in
O/P Current Tolerance	-5%		+5%	Full load
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	220Vac, Full load
			0.8S	220Vac, Full load, DALI-2
Line Regulation	-2%		+2%	Full load
Load Regulation	-5%		+5%	
Temperature Coefficient		0.05%/°C		Tc: 0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged

SS-75GA-E Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
0-10V Positive Dimming (Configurable)	Dim Vmax	0V		12V	DIM+ source current 110uA. Dimming prohibits reverse connection Configurable to 0-5V
	Dim Range	10%Iomax		100%loset	
	Rec.Dim Range	0V		10V	
10-0V Negative Dimming (Configurable)	Rec.Dim Range	0V		10V	DIM+ sink current I _{max} 40uA. Dimming prohibits reverse connection Configurable to 5-0V
PWM Dimming (Optional)	PWM High	9.8V		10.2V	DIM+ source current 110uA. Dimming prohibits reverse connection
	PWM Low	0V		0.3V	
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	Not available with negative logic
	Dim Range	10%Iomax		100%loset	DIM+ source current 110uA.
0-10V Dim to Off	Dim off	0.6V	0.8V	1.0V	If the led is less than maximum rated output voltage of 75%,the luminaries may possibly have slight light when dim-to-off. Thus the whole lighting system needs to be tested
	Dim on	0.7V	0.9V	1.1V	
10-0V Dim to Off	Dim off	9.0V	9.2V	9.4V	
	Dim on	8.8V	9.0V	9.2V	
DALI-2	DA+, DA- High Level	9.5V	16V	22.5V	
	DA+, DA- Low Level	-6.5V	0V	6.5V	
	DA+, DA- Current	0mA		2mA	
Lifetime(Tc≤80°C)		≥50,000 hours			80% load
MTBF		205,560 hours			220Vac,Full load, Ta=25°C (MIL-HDBK-217F)
IP Grade		IP66/IP67			
Tc		90°C			
Warranty		5 years			Tc: 80°C
Net Weight		560g			
Dimension		138mm*66mm*34.75mm			L x W x H

Note:

- 1.All the parameters above are tested Ta 25°C and LED load, unless specified.
- 2.When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value: 91KΩ/N.

SS-75GA-E Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
EAC	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 TP TC 004/2011 TP TC 020/2011	✓	
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	
DALI-2 Certification	Standard	Status	Remark
DALI-2 ⁽¹⁾	IEC62386-101,102 & 207	✓	D/DE models

NOTE: (1) DALI Parts: 101, 102, 207, 251, 252, 253

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015 GB/T 17743	
Radiation Emission	EN55015:2013+A1:2015 GB/T 17743	
Harmonic Current Emissions	IEC/EN 61000-3-2 GB/T 17625.1	Class C
Surge	IEC/EN61000-4-5	DM: 6kV,CM: 8kV,Criterion B
	EN61547	DM: 6kV,CM: 10kV,Criterion B

Note: For BE/DE models, to ensure surge protection performance, the casing must be reliably grounded.

SS-75GA-E Series LED Driver

Safety Test Items

B/D Model

Safety Test Items	Technical Indicators		Remark
Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Case	2U+1000Vac	2U+1000Vac	Basic insulation
Input-Dim	4U+2000Vac	4U+2750Vac	Reinforced insulation, B model
	2U+1000Vac	2U+1000Vac	Basic insulation, D model
Insulation Resistance	$\geq 10M\Omega$		Test voltage:500Vdc
Ground Resistance	$\leq 0.1\Omega$		25A/1min
Leakage Current	$\leq 0.75mA$		240Vac

BE/DE Model


Safety Test Items	Technical Indicators		Remark
Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Case	4U+2000Vac	4U+2750Vac	Reinforced insulation
Input-Dim	4U+2000Vac	4U+2750Vac	Reinforced insulation, BE model
	2U+1000Vac	2U+1000Vac	Basic insulation, DE model
Insulation Resistance	$\geq 10M\Omega$		Test voltage:500Vdc
Ground Resistance	$\leq 0.1\Omega$		25A/1min
Leakage Current	$\leq 0.75mA$		240Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim -)when Hi-pot test.

Performance Curves:

Input Inrush Current

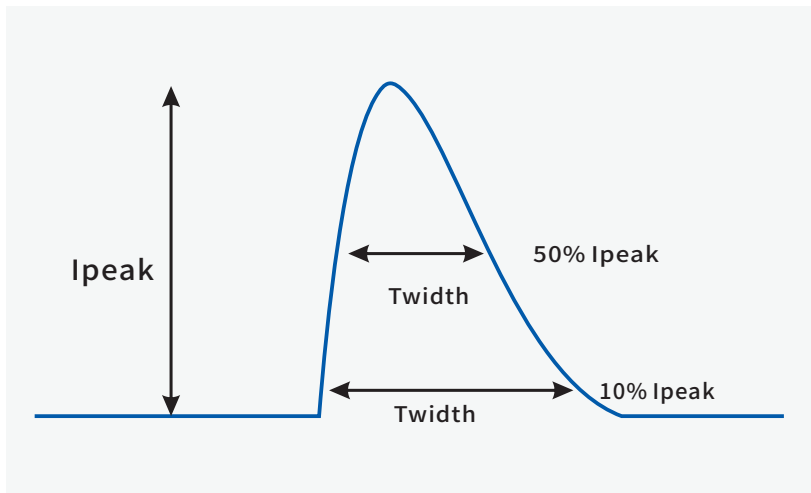


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
220Vac	45A	512uS	300uS

SS-75GA-E Series LED Driver


Performance Curves:

Output Voltage Vs. Output Current(Dim/AOC Window)

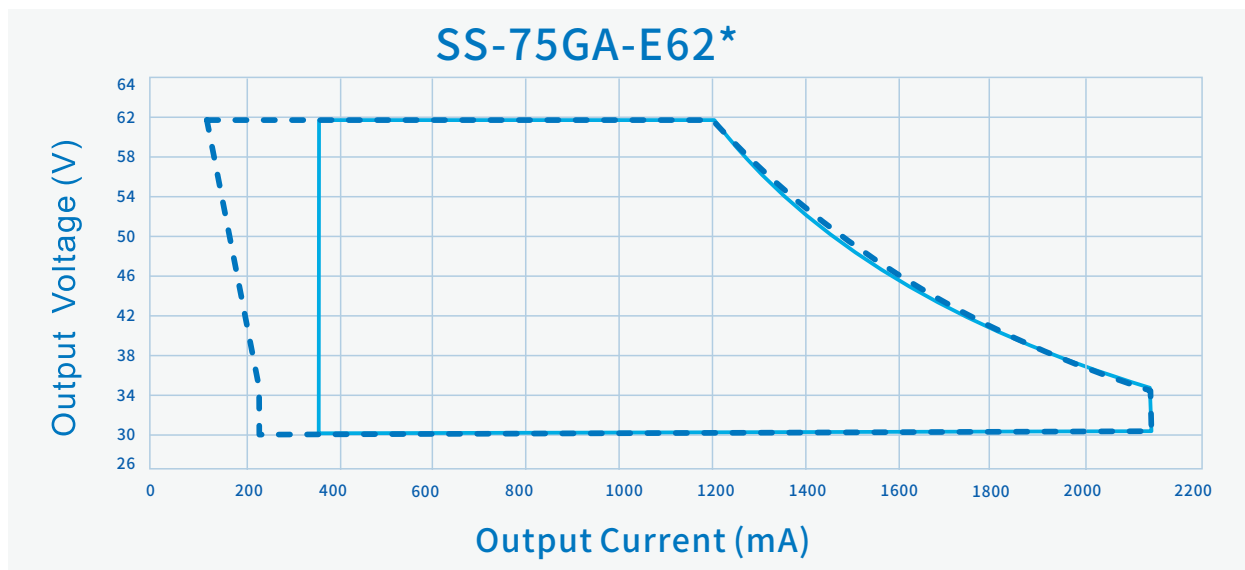

----- Dimming Window ————— AOC Window

Efficiency Vs. Output Voltage (Vin=220Vac)

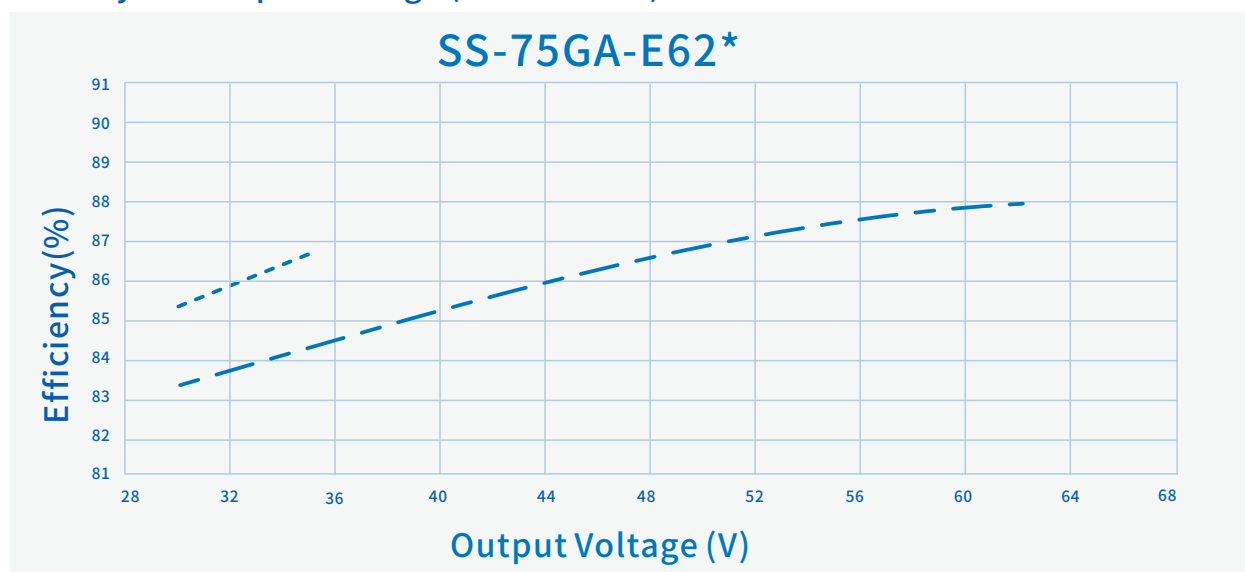


----- Io=2100mA - . - . Io=1200mA

SS-75GA-E Series LED Driver


Performance Curves:

Output Voltage Vs. Output Current(Dim/AOC Window)

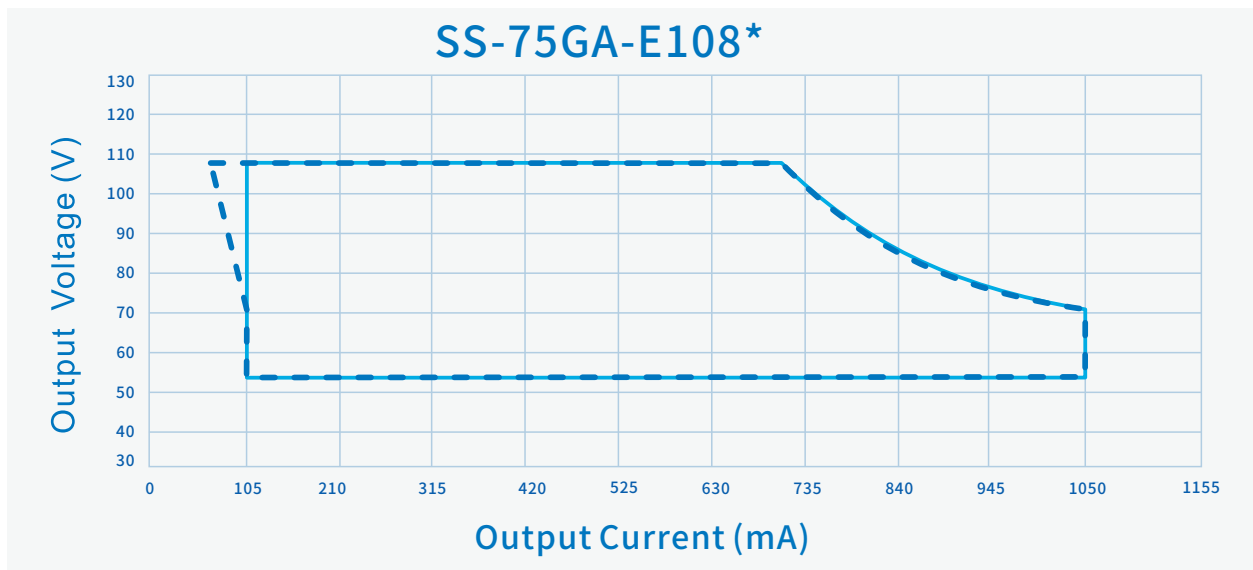

----- Dimming Window ————— AOC Window

Efficiency Vs. Output Voltage (Vin=220Vac)

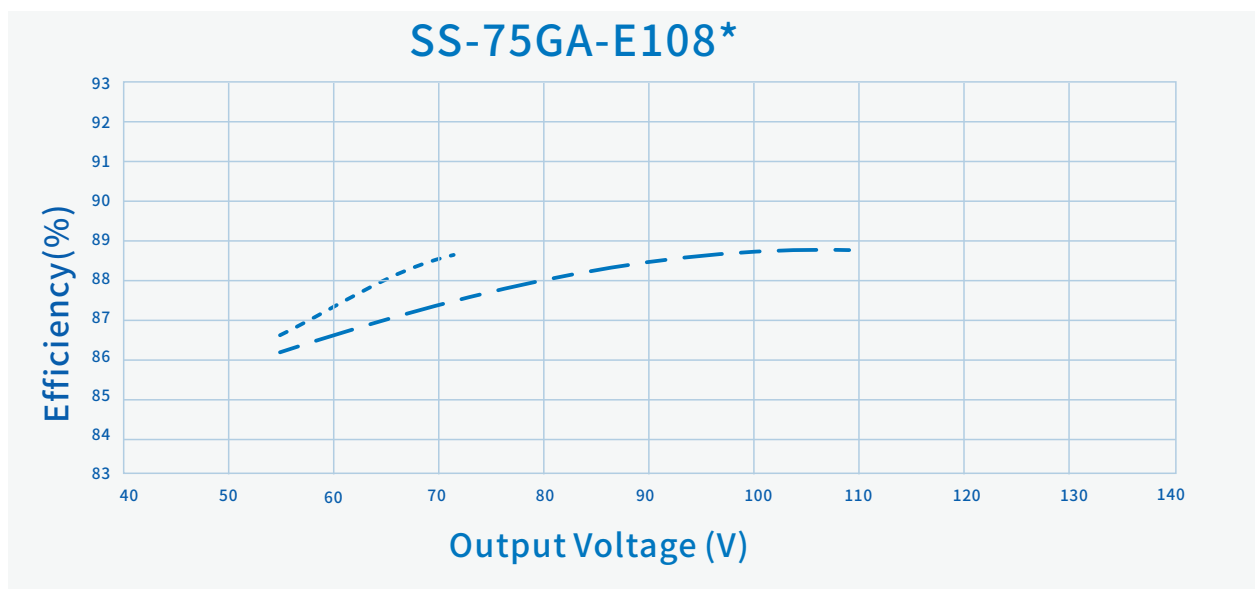


----- Io=1050mA

- . - . Io=700mA

SS-75GA-E Series LED Driver


Performance Curves:

Output Voltage Vs. Output Current(Dim/AOC Window)

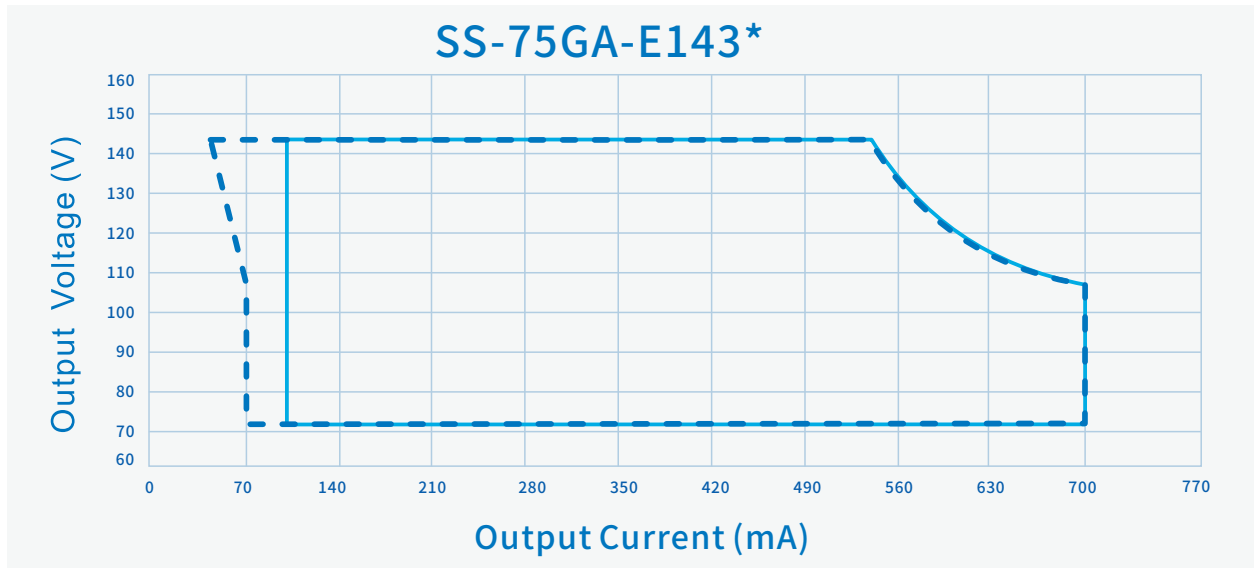

----- Dimming Window ————— AOC Window

Efficiency Vs. Output Voltage (Vin=220Vac)

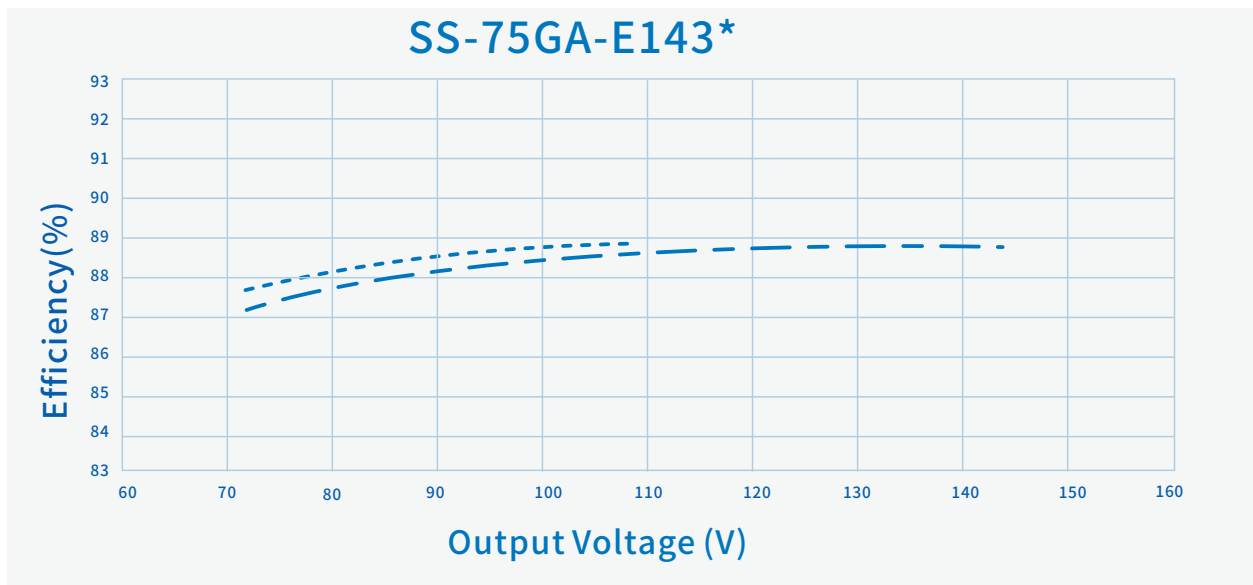


----- Io=700mA

- - - Io=530mA


SS-250GA-E Series LED Driver

Performance Curves:

Power Factor Vs. Output Power

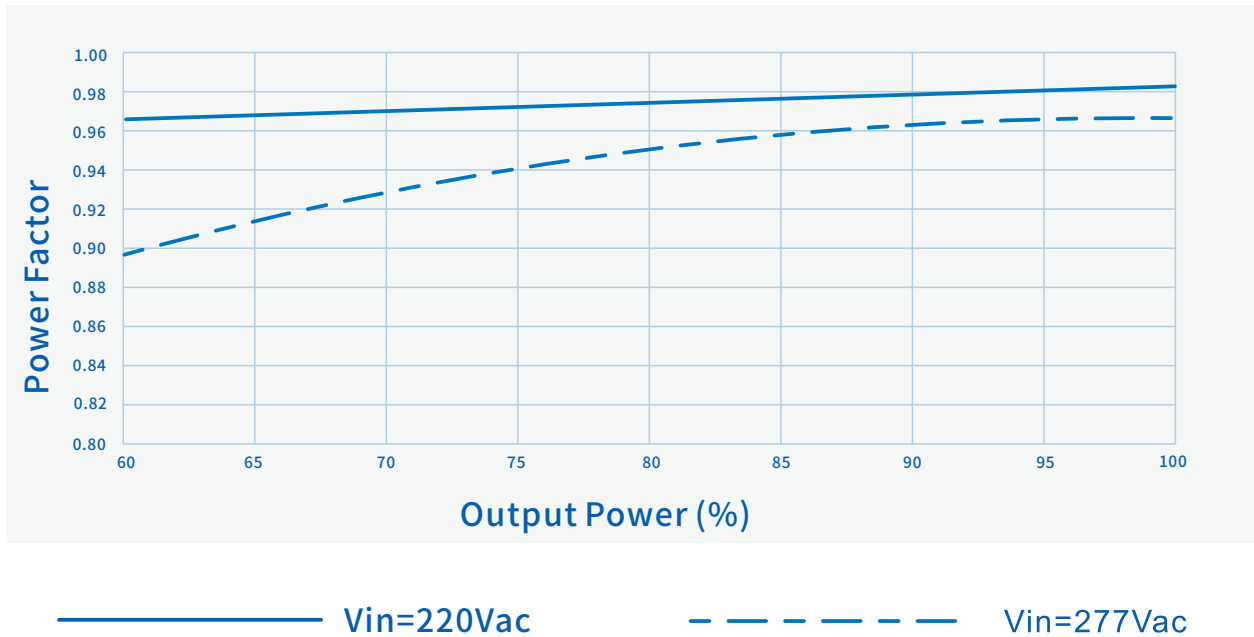

THD Vs. Output Power

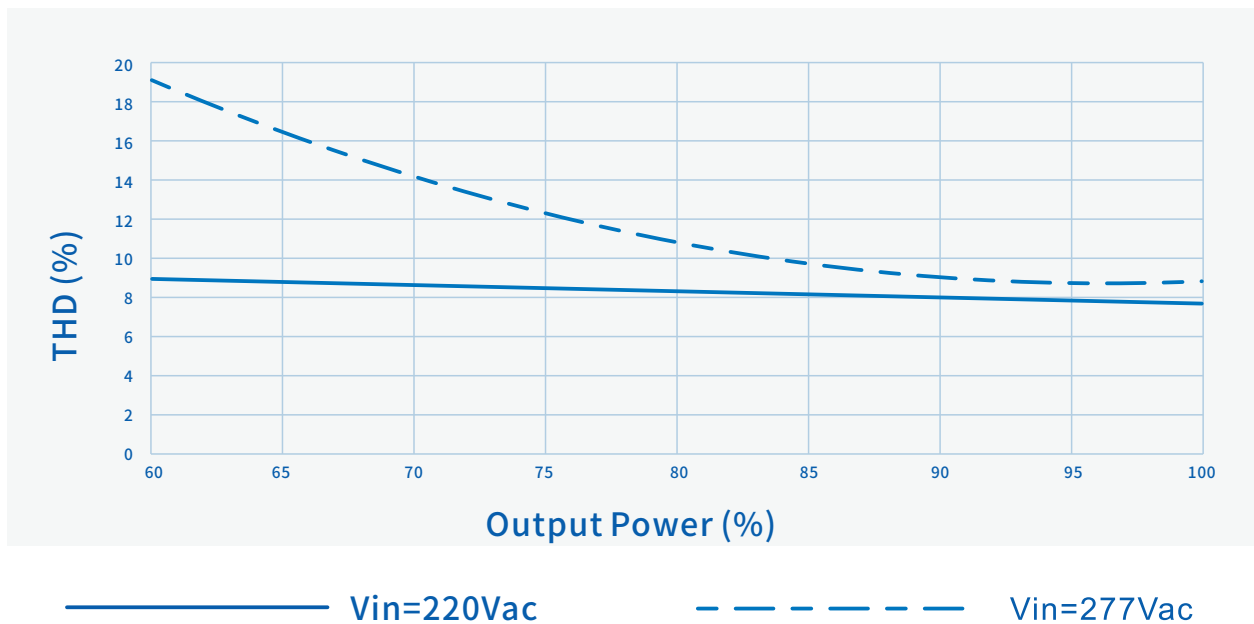


SS-75GA-E Series LED Driver


Performance Curves:

Derating Curve

(Output power Vs. Input Voltage)

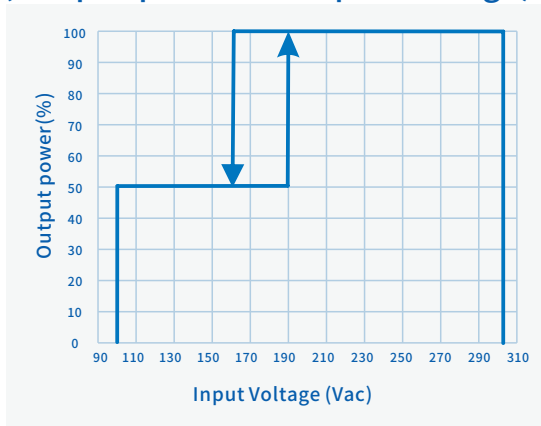


Output power Vs. Case Temperature

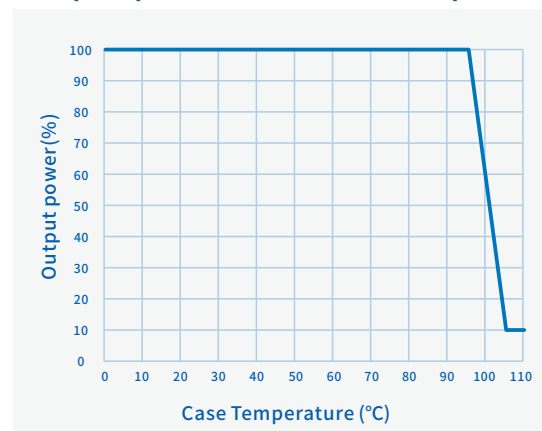

O/P Power Vs. Dimming(B/BE)




Lifetime Vs. Case Temperature

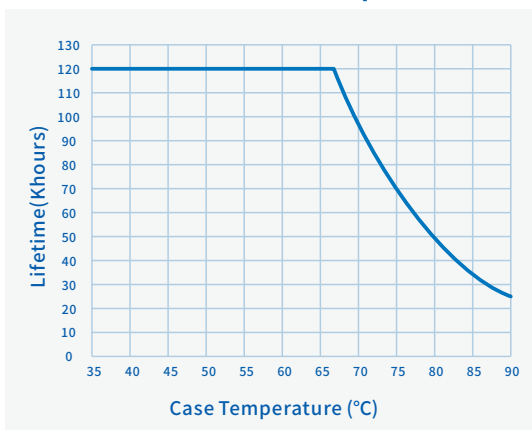


- 0-10V,0-5V,PWM
- - 10-0V,5-0V,PWM
- ... Resistor Dimming(100KΩ)

O/P Power Vs. Dimming(D/DE models)

Linear Dimming Curve

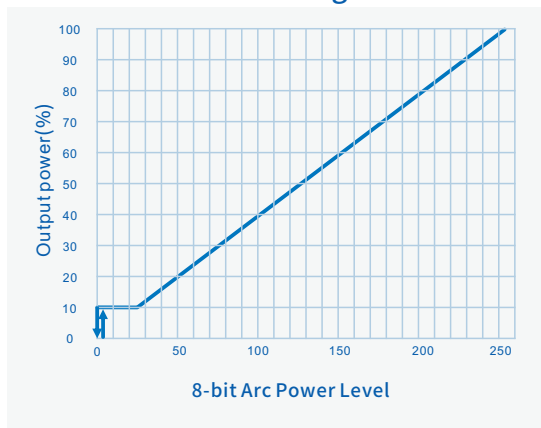

Logarithmic Dimming Curve

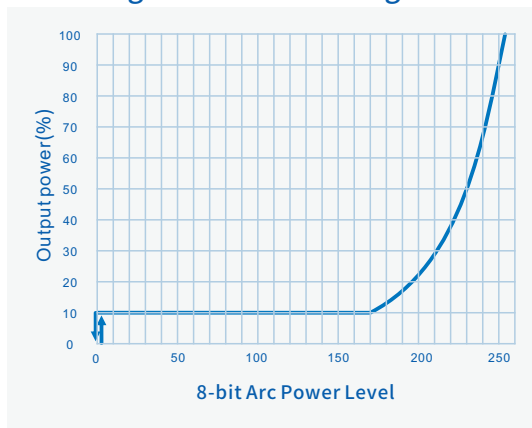


Programming connection diagram(B/BE Model):

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.


Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

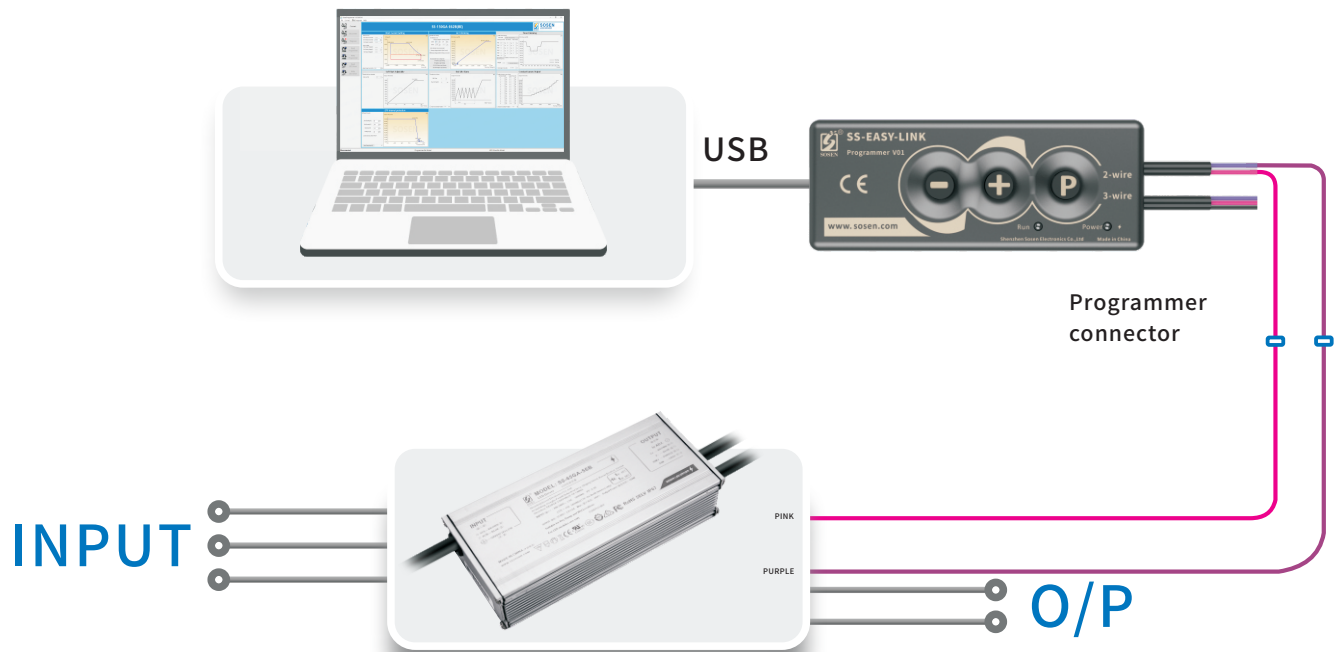

NFC Programming connection diagram(D/DE Model):

1. The driver does not need to be powered on during NFC programming.
2. The driver needs to be powered on during DALI dimming line programming.
3. Please refer to “SosenProgrammer-Help-Quick Operation Guide” for specific operation instructions.

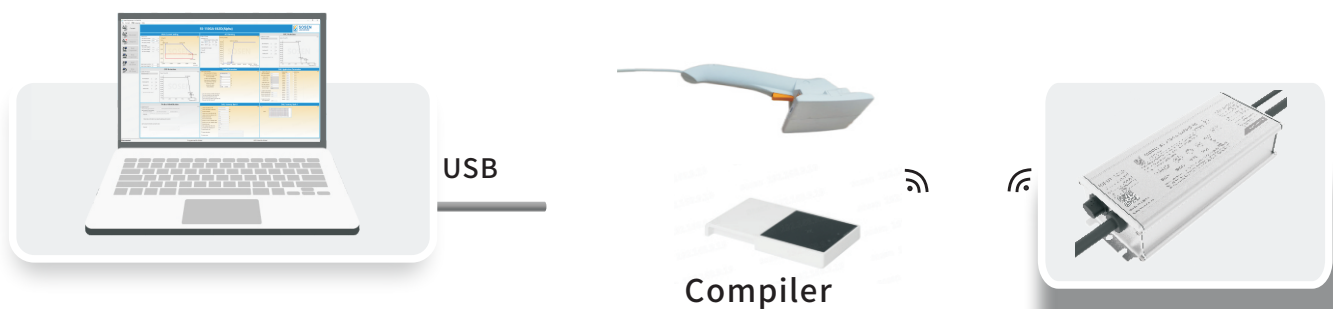


SS-75GA-E Series LED Driver

Parameter			Remark
Default setting	Positive logic dimming (0-10V)	Dimming voltage default 10V (source current)	
	Negative logic dimming (10-0V)	Dimming voltage default 0V (sink current)	
Dimming optional function	Positive logic dimming (0-10V)	Dimming voltage default 0V (sink current)	When the dimming wire is not connected, the LED driver output is the minimum (to be noted in the order)
		Resistance dimming not available	For parallel dimming applications with multiple LED drivers, it is recommended to use the sink current mode (to be noted in the order)

Note:

Select "Dimming voltage defaults to 10V (source current)" / "Dimming voltage defaults to 0V (sink current)", which needs to be set according to the dimmer used by the end user.


Settings Interface

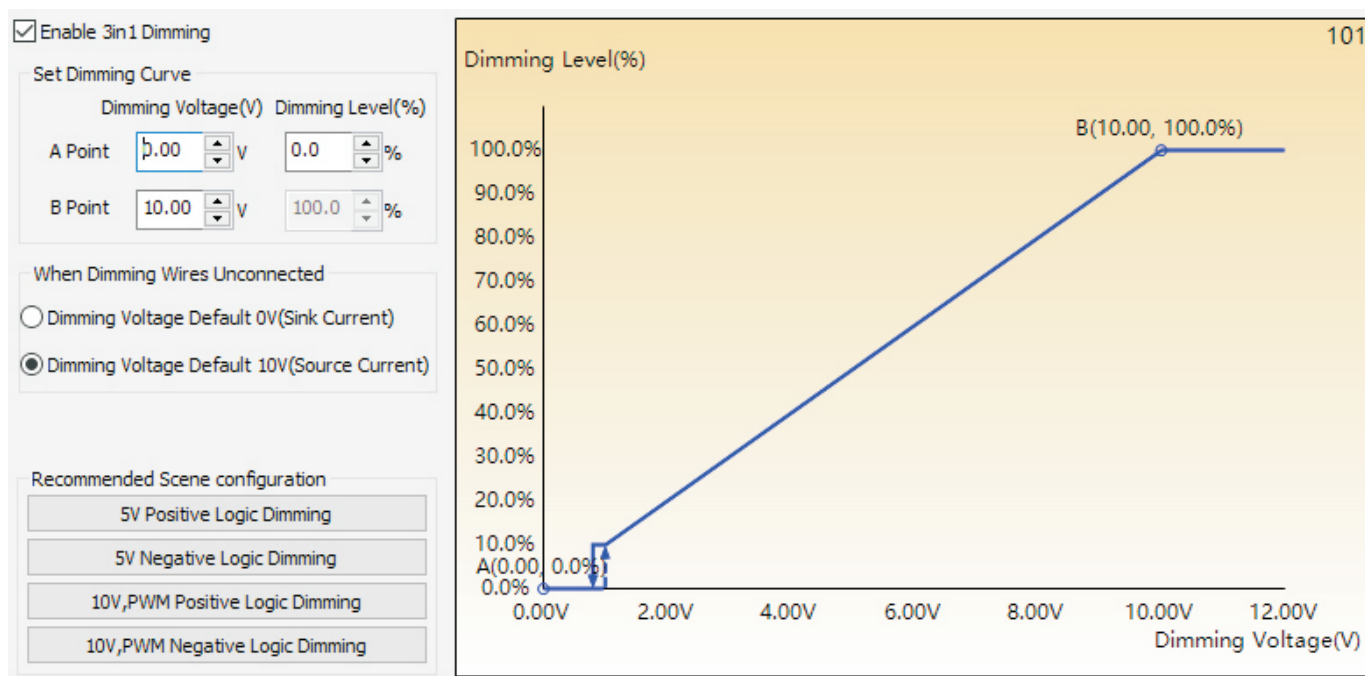

SS-75GA-E Series LED Driver

Mechanical Characteristics

Wire gauge (B/D models)

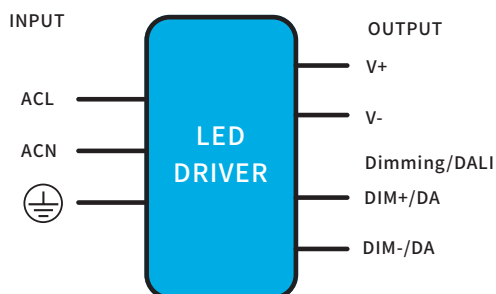

AC Input Cable(Exposed Length $450\pm 10\text{mm}$):

EU model: H05RN-F, $3\times 1.0\text{mm}^2$, O.D: 7.3mm, Brown: L, Blue: N, Yellow/Green: $\oplus$


DC Output Cable(Exposed Length $250\pm 10\text{mm}$):

EU model: H05RN-F, $2\times 1.0\text{mm}^2$, O.D: 7.0mm, Brown: V+, Blue: V-

DIM Cable(Exposed Length $220\pm 10\text{mm}$):

UL model: STYLE 21996, $2\times 22\text{AWG}$, O.D: 4.9mm, Purple: DIM+/DA, Pink: DIM-/DA

Wire gauge (BE/DE models)

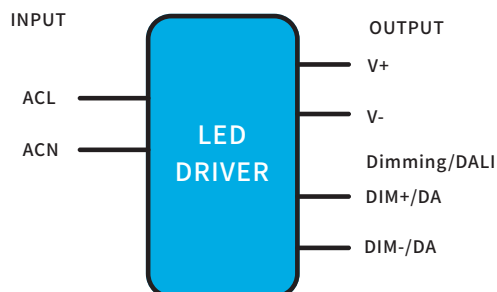

AC Input Cable(Exposed Length $450\pm 10\text{mm}$):

EU model: H05RN-F, $2\times 1.0\text{mm}^2$, O.D: 7.0mm, Brown: L, Blue: N

DC Output Cable(Exposed Length $250\pm 10\text{mm}$):

EU model: H05RN-F, $2\times 1.0\text{mm}^2$, O.D: 7.0mm, Brown: V+, Blue: V-

DIM Cable(Exposed Length $220\pm 10\text{mm}$):

UL model: STYLE 21996, $2\times 22\text{AWG}$, O.D: 4.9mm, Purple: DIM+/DA, Pink: DIM-/DA

Note:


AC Input Cable, DC O/P Cable, DIM/AUX Power/Programming Cable: Peeled length of cable: $43\pm 5\text{mm}$,
Tinned length of wire: $10\pm 2\text{mm}$

SS-75GA-E Series LED Driver

Outline and mounting dimensions (B/BE models)

Name Description	Standard Code	mm(In.)
Case Length	L3	121(4.76)
Case Width	W1	66(2.6)
Case Height	H	34.75(1.37)
Overall Length	L1	138(5.43)
Mounting Hole Length	L2	129.1(5.08)
Mounting Hole Width	W2	32(1.26)
TC Point Position	X	90(3.54)
TC Point Position	Y	25(0.98)
Screw hole width	W3	16(0.63)
Screw hole width	D1	4.1(0.16)

Note:
Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

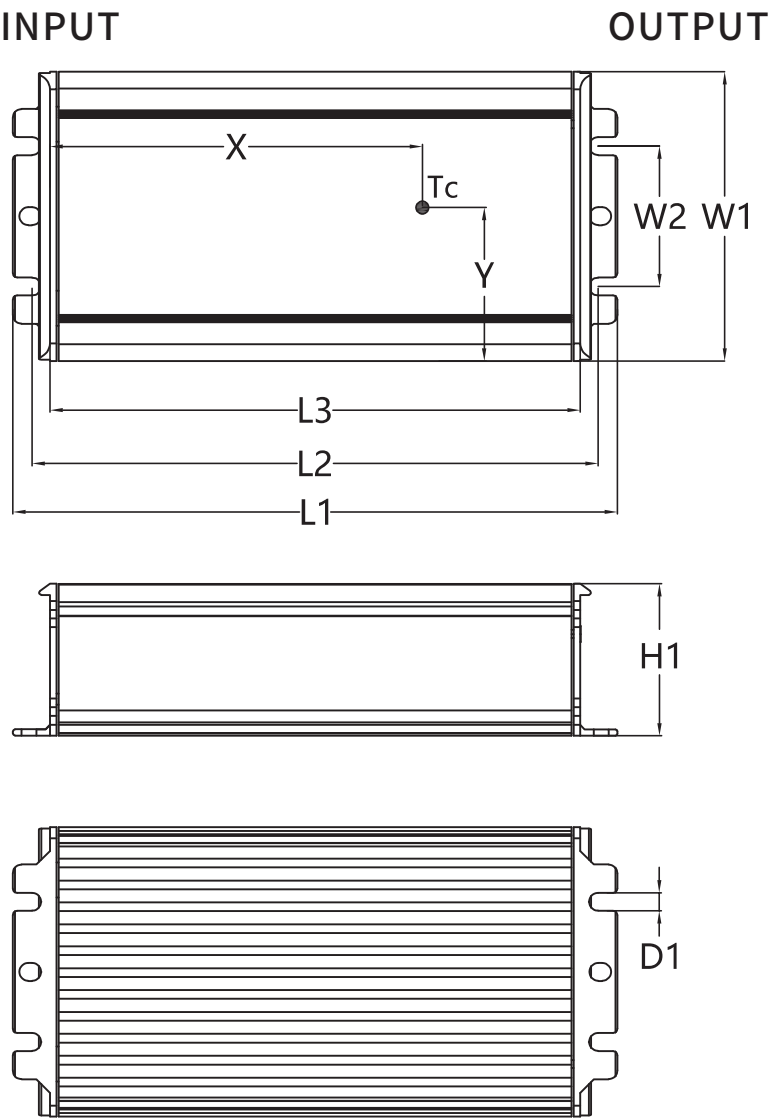

SS-75GA-E Series LED Driver

Outline and mounting dimensions (D/DE models)




Name Description	Standard Code	mm(In.)
Case Length	L3	121(4.76)
Case Width	W1	66(2.6)
Case Height	H1	34.75(1.37)
Overall Length	L1	138(5.43)
Mounting Hole Length	L2	129.1(5.08)
Mounting Hole Width	W2	32(1.26)
TC Point Position	D1	4.1(0.16)
TC Point Position	L4	10.5(0.41)
Screw hole width	W3	14.4(0.56)
Screw hole width	H2	10.3(0.4)
TC Point Position	X	90(3.54)
TC Point Position	Y	25(0.98)

Note:

- 1, Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.
- 2, AC Input Cable, DC O/P Cable, DIM/AUX Power/Programming Cable:
Peeled length of cable: 43 ± 5 mm, Tinned length of wire: 10 ± 2 mm

INPUT

OUTPUT

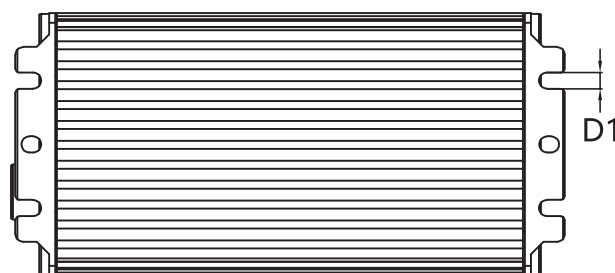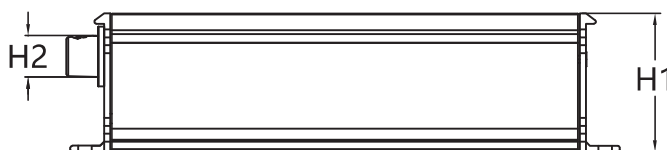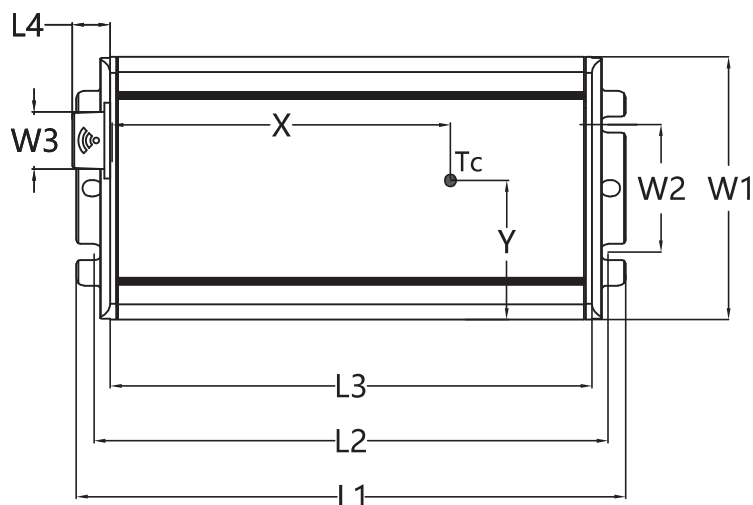

SS-75GA-E Series LED Driver



Assembly Tips

Please take isolation and waterproof measures if the dimming cable is not in use.

Package

- Outside carton dimension: $L \times W \times H = 495\text{mm} \times 385\text{mm} \times 162\text{mm}$;
- 14PCS/Carton;
- Net weight/Piece: 0.56kg; Gross weight/Carton: 9.1kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873—83.
Products should be rechecked if stored for over 1 year before installation.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2023/11/13	
V01	Add Models	2024/02/29	
V02	Update Model List	2024/11/27	
V03	Update Input Characteristics Data	2024/12/23	