



# SPECIFICATIONS


## SS-320VH-E AUX CC DRIVER

Model: SS-320VH-E AUX

Power: 320W

Rev.: V00

Release date: 2025-07-22

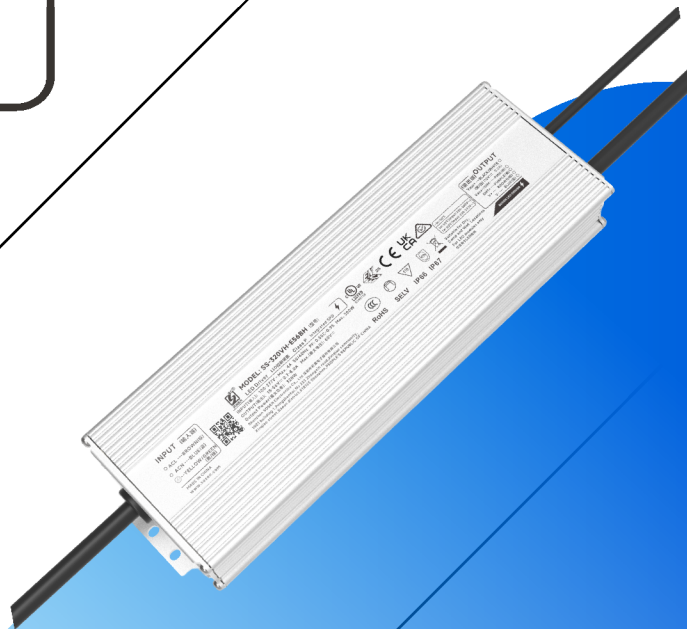

## Features

- UL**  
**LISTED**  
E360758



# EAC

UK  
CA

CE

## Class P

## IP66

**IP67**

## RoHS

## Description

Applications:

Street lighting, Tunnel lighting , High Pole lighting, High bay lighting, Stadium lighting, Plant lighting, Fish lighting, Stage lighting.

## Model List

| Model         | AC Input Range | Max. Pout | Vout Range | Recommended Volttage | Iout   | Default Current | THD (Typ.) | PF (Typ.) | Eff. (Typ.) | Max.Tc |
|---------------|----------------|-----------|------------|----------------------|--------|-----------------|------------|-----------|-------------|--------|
| SS-320VH-E56* | 90-305Vac      | 320W      | 18-56V     | 40-56V               | 0.7-8A | 6.7A            | 8%         | 0.97      | 94%         | 90°C   |

1.Default Tested:220Vac,fullload, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power  $V_o$  range.The voltage lower than full power  $V_o$  range, it is need to test the performance with the LED module.

# SS-320VH-E AUX LED DRIVER

## “\*” Means Additional Function

| “*” | 0-10V/PWM /Resistor<br>Or 10-0V (suffix:B) | Auxiliary power<br>12V(suffix:H) | Class I | Class II | Remark |
|-----|--------------------------------------------|----------------------------------|---------|----------|--------|
| BH  | ✓                                          | ✓                                | ✓       |          |        |

## Input Characteristics

| Parameter                  | Min.   | Typ.       | Max.   | Remark                    |
|----------------------------|--------|------------|--------|---------------------------|
| AC Input Range             | 90Vac  | 100-277Vac | 305Vac | Reference Derating Curve  |
| DC Input Range             | 127Vdc |            | 300Vdc |                           |
| Input Frequency Range      | 47Hz   | 50/60Hz    | 63Hz   |                           |
| Max Input Current          |        |            | 4.0A   | 100Vac, Full load         |
| Max Input Power            |        |            | 380W   | 100Vac, Full load         |
| Max Inrush Current(120Vac) |        |            | 13A    | Cold start                |
| Max Inrush Current(220Vac) |        |            | 20A    | Cold start                |
| Max Inrush Current(277Vac) |        |            | 32A    | Cold start                |
| Standby Power              |        |            | 0.5W   | 220Vac/50Hz, Dim-to-off   |
| Power Factor               | 0.95   | 0.97       |        | 220Vac/50Hz, Full load    |
|                            | 0.90   |            |        | 120-277Vac, 60%-100% load |
| THD                        |        | 8%         | 10%    | 220Vac/50Hz, Full load    |
|                            |        |            | 20%    | 120-277Vac,60%-100% load  |

# SS-320VH-E AUX LED DRIVER

## Output Characteristics

| Parameter                    | Min.  | Typ.     | Max.  | Remark                                                                                        |
|------------------------------|-------|----------|-------|-----------------------------------------------------------------------------------------------|
| O/P Voltage Range            | 18V   |          | 56V   | Power derated @18-40V                                                                         |
| Rated O/P Voltage            | 40V   |          | 56V   | $P_o = V_o \cdot I_o = 320W$ , Full load                                                      |
| Rated O/P Current            | 5.7A  |          | 8A    | 8A for 40V, 5.7A for 56V                                                                      |
| Adj. O/P Current (AOC) Range | 0.7A  |          | 8A    |                                                                                               |
| No Load Voltage              |       |          | 60V   |                                                                                               |
| Efficiency @120Vac           | 90.0% | 92.0%    |       | Output 48V/6.7A, Test after burn-in                                                           |
| Efficiency @220Vac           | 92.0% | 94.0%    |       | Output 48V/6.7A, Test after burn-in                                                           |
| Efficiency @277Vac           | 92.5% | 94.5%    |       | Output 48V/6.7A, Test after burn-in                                                           |
| O/P Current Tolerance        | -5%   |          | +5%   | Full load                                                                                     |
| O/P Current Ripple(PK-AV)    |       | 5%       | 10%   | Full load                                                                                     |
| Start-up Current Overshoot   |       |          | 10%   | Full load                                                                                     |
| Start-up Time                |       |          | 0.5S  | 120-277Vac, Full load                                                                         |
| Line Regulation              | -2%   |          | +2%   | Full load                                                                                     |
| Load Regulation              | -2%   |          | +2%   |                                                                                               |
| Temperature Coefficient      |       | 0.03%/°C |       | $T_c: 0^{\circ}C \sim 90^{\circ}C$                                                            |
| OTP                          | 90°C  | 100°C    | 110°C | Drop current when OTP, and it can be automatically restored after the abnormality is removed. |
| Short Circuit Protection     |       |          |       | Driver will not be damaged                                                                    |

# SS-320VH-E AUX LED DRIVER

## Other Characteristics

| Parameter                             |                               | Min.                | Typ. | Max.      | Remark                                                                                                               |
|---------------------------------------|-------------------------------|---------------------|------|-----------|----------------------------------------------------------------------------------------------------------------------|
| Auxiliary Power                       | O/P Voltage                   | 10.8V               | 12V  | 13.2V     |                                                                                                                      |
|                                       | O/P Current                   | 0mA                 |      | 200mA     |                                                                                                                      |
|                                       | Output Transient Peak Current |                     |      | 500mA     | 500mA peak for a maximum duration of 2.2 ms in a 6.0ms period during which time the average should not exceed 250mA. |
| 0-10V Dimming (Configurable)          | Dim Vmax                      | 0V                  |      | 12V       | DIM+ source current 110uA.<br>Dimming prohibits reverse connection<br>Configurable to 0-5V                           |
|                                       | Dim Range                     | 10%Iomax            |      | 100%Iolet |                                                                                                                      |
|                                       | Rec.Dim Range                 | 0V                  |      | 10V       |                                                                                                                      |
| 10-0V Negative Dimming (Configurable) | Rec.Dim Range                 | 0V                  |      | 10V       | DIM+ sink current I <sub>max</sub> 40uA.<br>Dimming prohibits reverse connection<br>Configurable to 5-0V             |
| PWM Dimming (Optional)                | PWM High                      | 9.8V                |      | 10.2V     | DIM+ source current 110uA.<br>Dimming prohibits reverse connection.                                                  |
|                                       | PWM Low                       | 0V                  |      | 0.3V      |                                                                                                                      |
|                                       | Frequency                     | 1KHz                |      | 2KHz      |                                                                                                                      |
|                                       | PWM Duty                      | 0%                  |      | 100%      |                                                                                                                      |
| Resistor Dimming (Optional)           | Resistance                    | 0Kohm               |      | 100Kohm   | DIM+ source current 110uA<br>Not available with negative logic.                                                      |
|                                       | Dim Range                     | 10%Iomax            |      | 100%Iolet |                                                                                                                      |
| 0-10V Dim to Off                      | Dim off                       | 0.7V                | 0.8V | 0.9V      | According to the voltage,PWM, resistance dimming ratio.                                                              |
|                                       | Dim on                        | 0.8V                | 0.9V | 1.0V      |                                                                                                                      |
| 10-0V Dim to Off                      | Dim off                       | 9.0V                | 9.2V | 9.4V      |                                                                                                                      |
|                                       | Dim on                        | 8.8V                | 9.0V | 9.2V      |                                                                                                                      |
| Timing Curve(Optional)                |                               | By programming      |      |           | Set by program.                                                                                                      |
| Lifetime(T <sub>c</sub> ≤80°C)        |                               | ≥50,000 hours       |      |           | Full load.                                                                                                           |
| MTBF                                  |                               | 256,000 hours       |      |           | 220Vac,Full load, Ta=25°C (MIL-HDBK-217F)                                                                            |
| Protection class                      |                               | IP66/IP67           |      |           |                                                                                                                      |
| T <sub>c</sub>                        |                               | 90°C                |      |           |                                                                                                                      |
| Warranty                              |                               | 5 years             |      |           | T <sub>c</sub> 80°C                                                                                                  |
| Net Weight                            |                               | 1350g               |      |           |                                                                                                                      |
| Dimension                             |                               | 243mm*76.5mm*38.5mm |      |           | LxWxH                                                                                                                |

NOTE: All the parameters above are tested Ta 25°C and LED load, unless specified.

# SS-320VH-E AUX LED DRIVER

## Environmental Requirements

| Parameter                    | Min.  | Typ. | Max.  | Remark |
|------------------------------|-------|------|-------|--------|
| Operating Temperature(Tcase) | -40℃  | 25℃  | +90℃  |        |
| Storage Temperature          | -40℃  | 25℃  | +90℃  |        |
| Operation Humidity           | 10%RH |      | 90%RH |        |
| Storage Humidity             | 5%RH  |      | 95%RH |        |
| Altitude                     | -65m  |      | 4000m |        |

## Safety and EMI/EMS Standards

| Certification | Standard                                                                                    | Status | Remark |
|---------------|---------------------------------------------------------------------------------------------|--------|--------|
| UL            | UL8750                                                                                      | ✓      |        |
| CUL           | CAN/CSA C22.2 No.250.13                                                                     | ✓      |        |
| ENEC          | EN 61347-1<br>EN 61347-2-13<br>EN IEC 62384                                                 | ✓      |        |
| RCM           | AS/NZS61347.2.13                                                                            |        |        |
| CCC           | GB/T 19510.1<br>GB/T 19510.213                                                              |        |        |
| CE            | EN 61347-1<br>EN 61347-2-13<br>EN 62493                                                     | ✓      |        |
|               | EN 301 489-1<br>EN 301 489-3<br>EN 300 330<br>EN 62479/EN 50663/EN 50665/EN 50364           |        |        |
| UKCA          | EN 61347-1<br>EN 61347-2-13<br>EN 62493<br>BS EN 61347-1<br>BS EN 61347-2-13<br>BS EN 62493 | ✓      |        |
| EAC           | EN 61347-2-13<br>EN 61347-1<br>TP TC 004/2011<br>TP TC 020/2011                             | ✓      |        |

# SS-320VH-E AUX LED DRIVER

## Safety and EMI/EMS Standards

| EMI/EMS                    | Criterion                        | Status | Remark                       |
|----------------------------|----------------------------------|--------|------------------------------|
| Conduction Emission        | EN IEC 55015                     | ✓      | 230Vac                       |
|                            | GB/T 17743                       |        |                              |
|                            | FCC Part 15 Subpart B;ANSI C63.4 | ✓      | 120/277Vac;ClassB            |
| Radiation Emission         | EN IEC 55015                     | ✓      | 230Vac                       |
|                            | GB/T 17743                       |        |                              |
|                            | FCC Part 15 Subpart B;ANSI C63.4 | ✓      | 120/277Vac;ClassB            |
| Harmonic Current Emissions | EN IEC 61000-3-2                 | ✓      | ClassC                       |
|                            | GB 17625.1                       |        | ClassC                       |
| Surge                      | IEC EN61000-4-5                  | ✓      | DM: 6kV,CM: 8kV,Criterion B  |
|                            | EN 61547                         | ✓      | DM: 6kV,CM: 10kV,Criterion B |
|                            | ANSI/C82.77-5                    | ✓      | DM: 6kV,CM: 6kV,Criterion B  |
| Ring Wave                  | IEC EN 61000-4-12                | ✓      | DM: 6kV,CM: 6kV,Criterion B  |
|                            | ANSI/C82.77-5                    | ✓      | DM: 6kV,CM: 6kV,Criterion B  |

# SS-320VH-E AUX LED DRIVER

## Safety Test Items


| Safety Test Items       | Technical Indicators       |                              |                             | Remark              |
|-------------------------|----------------------------|------------------------------|-----------------------------|---------------------|
| Insulation Requirements | UL Insulation Requirements | ENEC Insulation Requirements | CCC Insulation Requirements |                     |
| Input-Output            | 2U+1000Vac                 | 4U+2000Vac                   | 4U+2000Vac                  |                     |
| Input-Case              | 2U+1000Vac                 | 2U+1000Vac                   | 2U+1000Vac                  | Basic insulation    |
| Input-Dim               | 2U+1000Vac                 | 4U+2000Vac                   | 4U+2000Vac                  |                     |
| Dim-Case                | 500Vac                     |                              |                             | Basic insulation    |
| Insulation Resistance   | $\geq 10\text{M}\Omega$    |                              |                             | Test voltage:500Vdc |
| Ground Resistance       | $\leq 0.1\Omega$           |                              |                             | 25A/1min            |
| Leakage Current         | $\leq 0.75\text{mA}$       |                              |                             | 277Vac              |

Note:

1. The power supply complies with the relevant EMC standards. The power supply, as part of the terminal equipment system, needs to be combined with the whole system to reconfirm EMC.
2. During voltage withstand test, please short-circuit between L/N, short-circuit between positive/negative output line, and short-circuit between positive/negative dimmer line and auxiliary power supply.

## Performance Curves

### Input Inrush Current

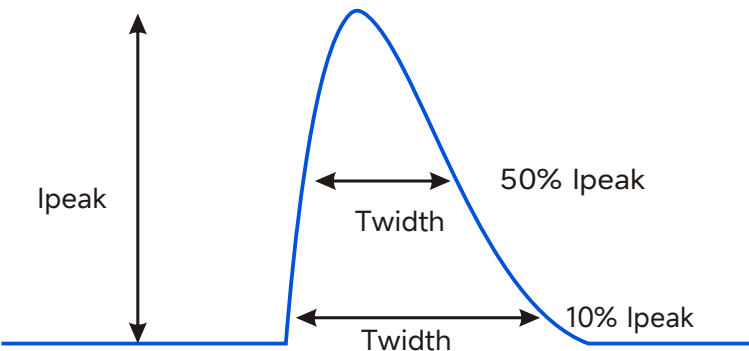


| $V_{in}$ | $I_{peak}$ | $T(@10\% \text{ of } I_{peak})$ | $T(@50\% \text{ of } I_{peak})$ |
|----------|------------|---------------------------------|---------------------------------|
| 120Vac   | 13A        | 4.5mS                           | /                               |
| 220Vac   | 20A        | /                               | 1.3mS                           |
| 277Vac   | 32A        | 4.5mS                           | /                               |


# SS-320VH-E AUX LED DRIVER

## Performance Curves

Output Voltage Vs. Output Current(Dim/AOC Window)

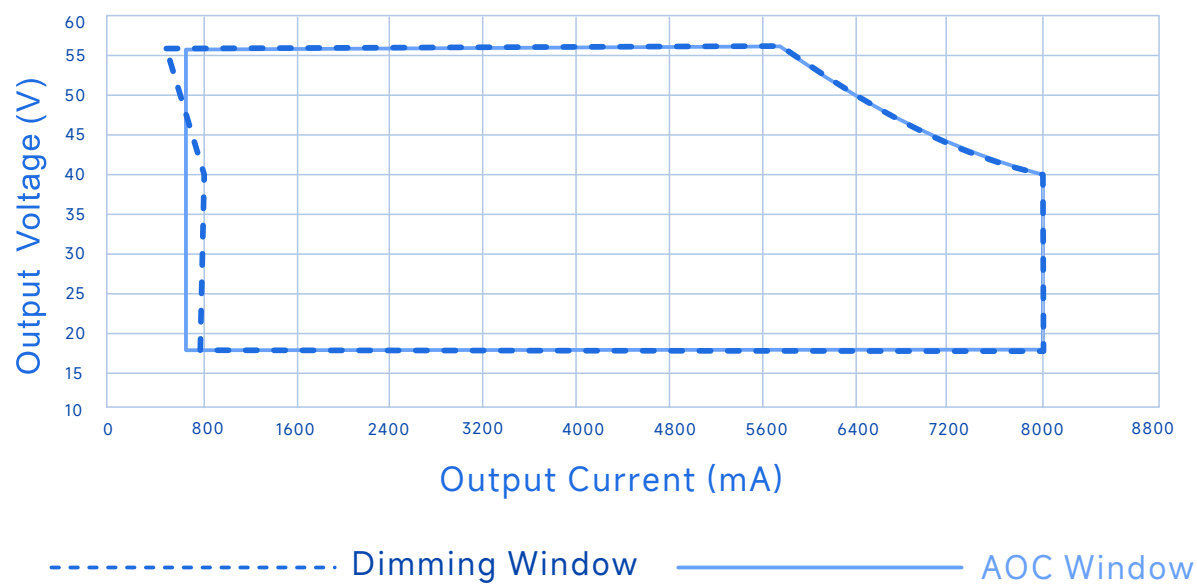


Efficiency Vs. Output Voltage(Vin=120Vac)

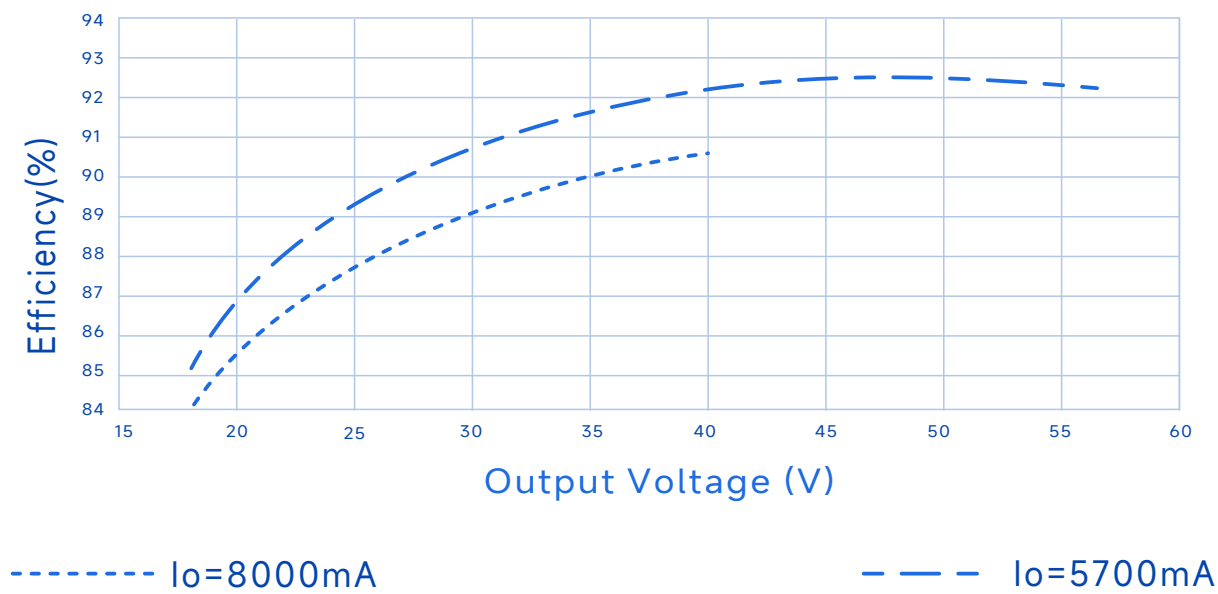


# SS-320VH-E AUX LED DRIVER

## Performance Curves

Efficiency Vs. Output Voltage (Vin=220Vac)

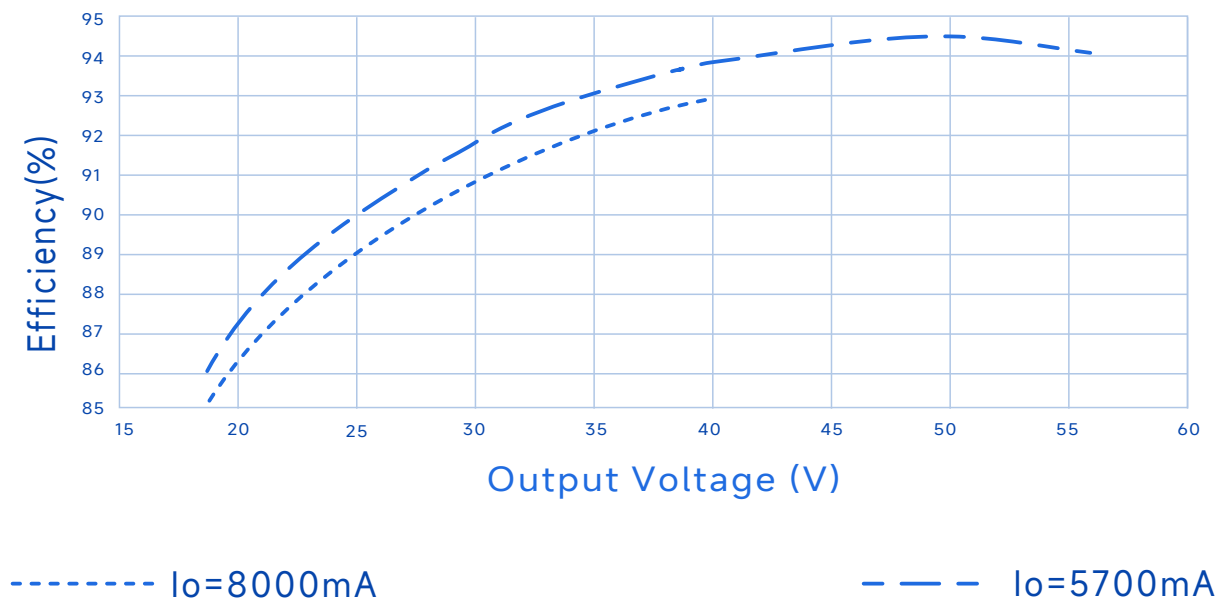


Efficiency Vs. Output Voltage (Vin=277Vac)

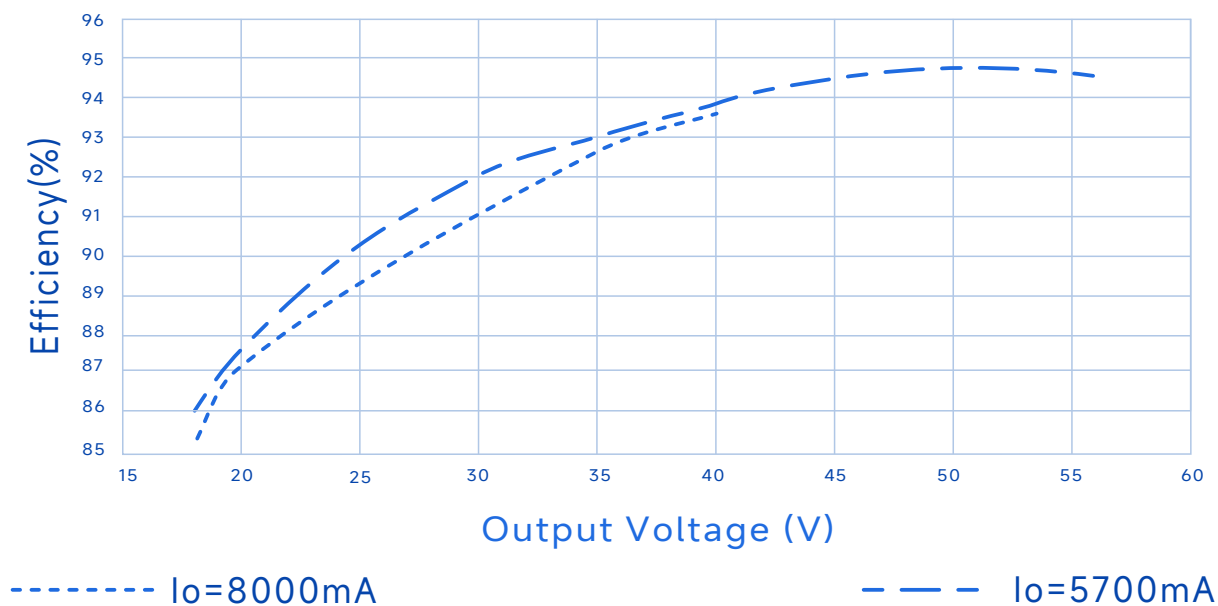

# SS-320VH-E AUX LED DRIVER


## Performance Curves

Power Factor Vs. Output Power

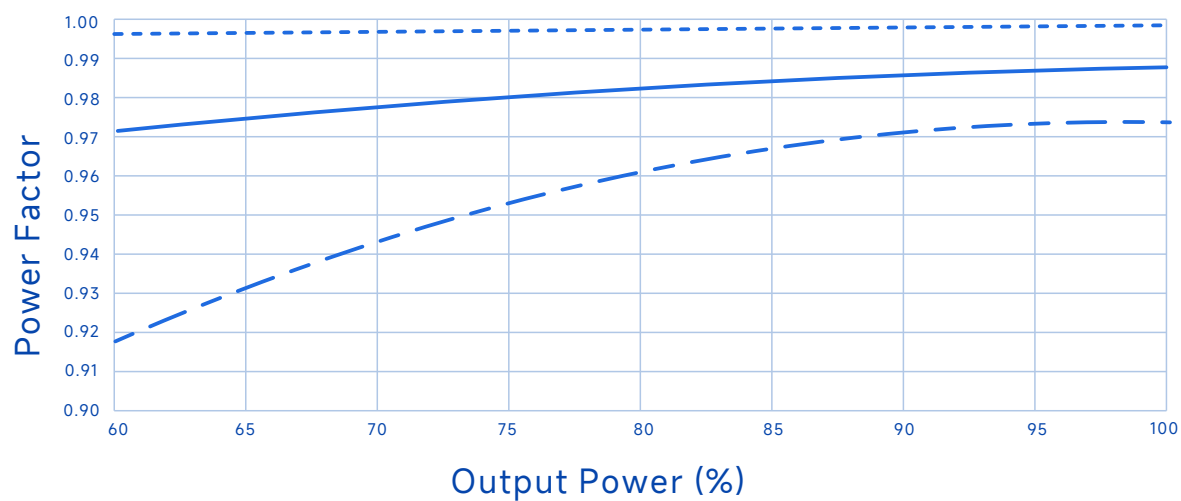

----- Vin=120Vac      ————— Vin=220Vac      - - - - Vin=277Vac

THD Vs. Output Power

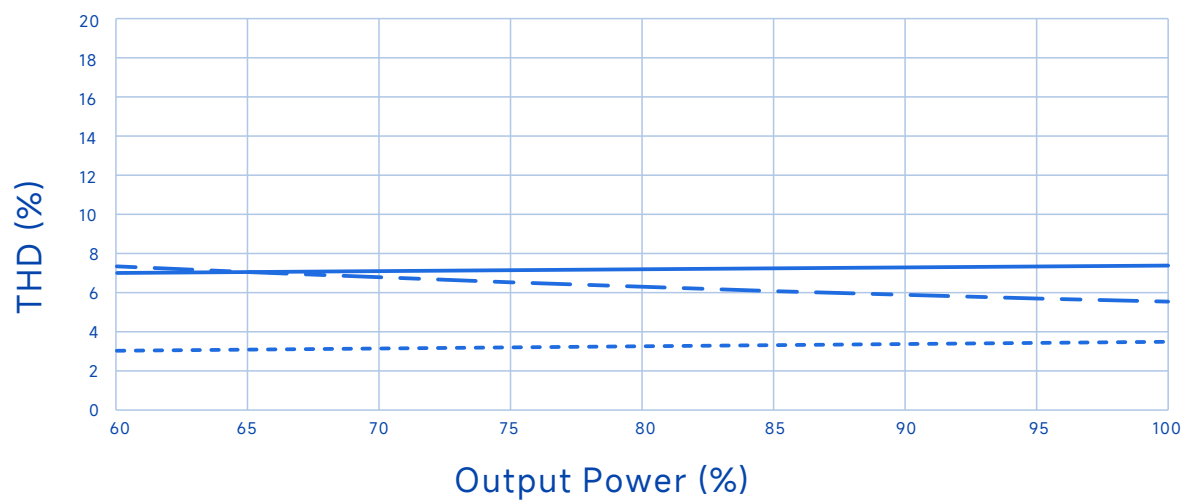


----- Vin=120Vac      ————— Vin=220Vac      - - - - Vin=277Vac


# SS-320VH-E AUX LED DRIVER

## Performance Curves


Output Power Vs. Input Voltage

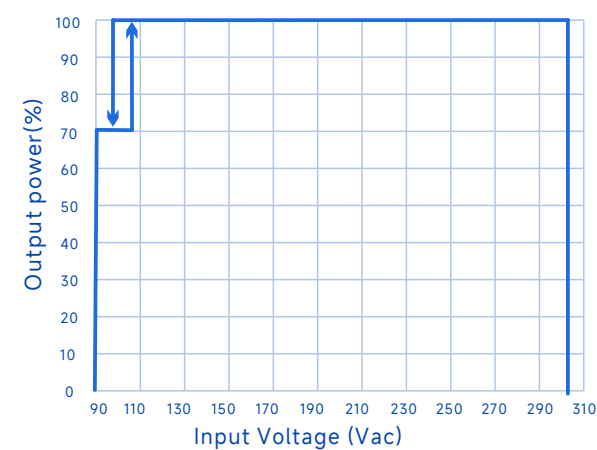


Output Power Vs. Case Temperature

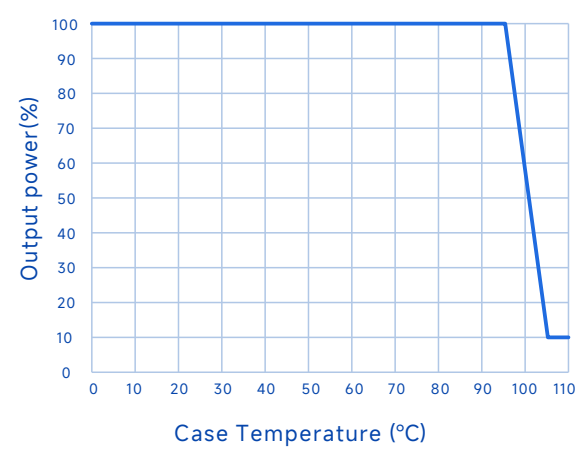

Output Power Vs. Dimming

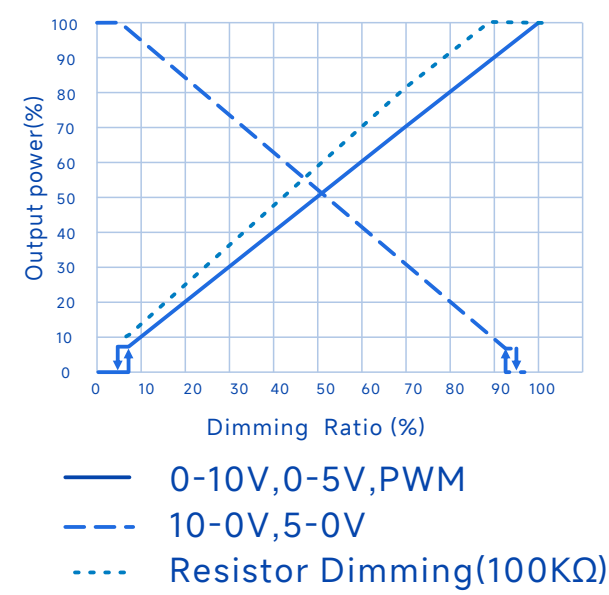


Lifetime Vs. Case Temperature

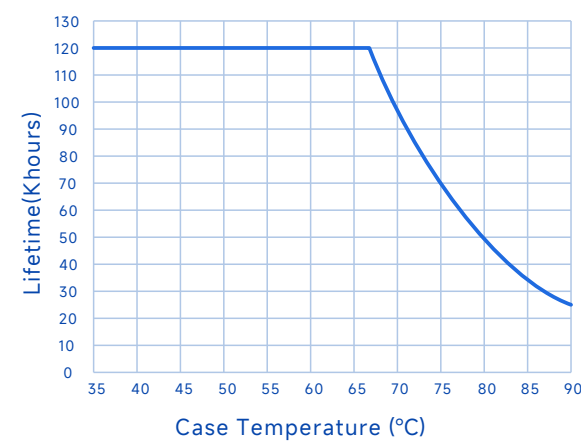

# SS-320VH-E AUX LED DRIVER

## Programming connection diagram

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.  
Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.  
Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

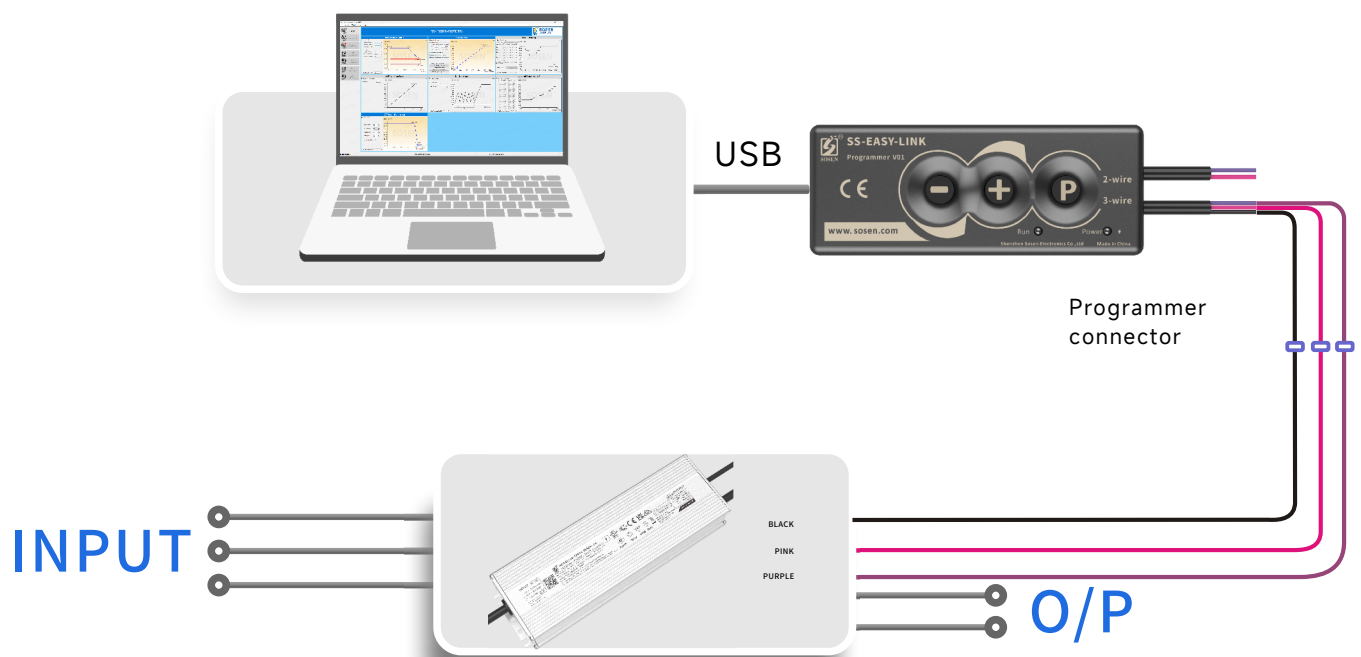



# SS-320VH-E AUX LED DRIVER

## Mechanical Characteristic

### Wire gauge

INPUT

ACL

ACN



LED DRIVER

OUTPUT

V+

V-

Dimming

DIM+

DIM-

Vaux+

**AC Input Cable(Exposed Length 450±10mm):**  
Global model:SJOW,3\*17AWG,O.D:8.0mm,Brown:L,Blue:N,Yellow/Green:  
UL model:SJTW,3\*18AWG,O.D:7.8mm,Black:L,White:N,Green:


**DC Output Cable(Exposed Length 250±10mm):**  
Global model:SJOW,2\*17AWG,O.D:7.7mm,Brown:V+,Blue:V-  
UL model:SJTW,2\*18AWG,O.D:7.3mm,Red:V+,Black:V-

**DIM Cable(Exposed Length 220±10mm):**  
UL model:STYLE 21996,3\*22AWG.O.D:4.9mm,Purple:DIM+,Pink:DIM-,  
Black/White:Vaux+

NOTE:  
AC Input Cable,DC O/P Cable,DIM/AUX Power/Programming Cable:Peeled length of cable:43±5mm,  
Tinned length of wire:10±2mm

### Outline and mounting dimensions

| Name<br>Description  | Standard<br>Code | mm(In.)    |
|----------------------|------------------|------------|
| Overall Length       | L1               | 243(9.56)  |
| Mounting Hole Length | L2               | 235(9.25)  |
| Case Length          | L3               | 226(8.89)  |
| Overall Width        | W1               | 76.5(3.01) |
| Mounting Hole Width  | W2               | 50(1.96)   |
| Mounting Hole Width  | W3               | 27(1.06)   |
| Mounting Hole Width  | H1               | 38.5(1.51) |
| Screw Hole Width     | D1               | 4(0.15)    |
| Screw Hole Width     | D2               | 5(0.19)    |
| TC Point Position    | X                | 166(5.53)  |
| TC Point Position    | Y                | 42(1.65)   |

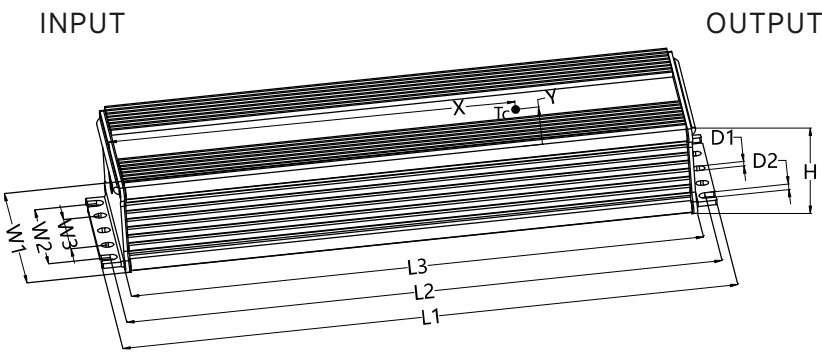

Note  
Please follow the "LED Driver User Manual" obtained  
from SOSEN's official website for assembly.

# SS-320VH-E AUX LED DRIVER

---



## Assembly Tips

When the dimmer line is not in use, please seal the connector of the dimmer line with insulating sleeve.

## Package

- Outside carton dimension: L×W×H =493mm×385mm×116mm;
- 7PCS/Carton;
- Net weight/Piece: 1.35kg;Gross weight/Carton: 10.8kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation


Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873-83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

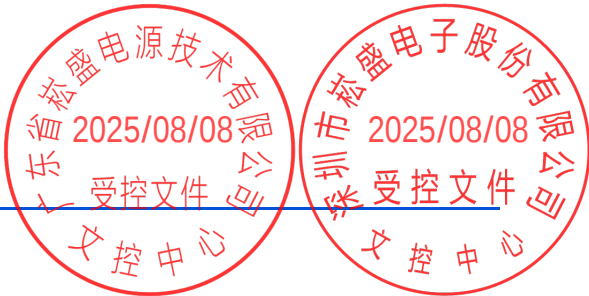

Revision History

| Version | Description of Update | Updated Date | Remark |
|---------|-----------------------|--------------|--------|
| V00     | Original Release      | 2025/07/22   |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |
|         |                       |              |        |