



# SOSEN LED Driver, Your Smart Choice

## Specifications

### SS-75NL-E Series LED Driver

Model: SS-75NL-E260\*

Description: 75W LED Driver

Rev.: V06

Release Date: 2026-01-12

# SS-75NL-E Series LED Driver

**SOSEN**  
LED DRIVER



**LED DRIVER**

**NL-E Series**



## Features:

- Efficiency up to 92%
- Dimming: 0-10V,PWM,Resistor
- Protections: SCP/OTP/OVP
- Surge protection: CM: 6kV, DM: 6kV
- Warranty: 5 years



**CE RoHS Class P**

## Description:

SS-75NL-E series are 75W non-isolated constant current LED Driver with 90-305VAC. It has high efficiency, compact housing, fully potted, high reliability, high cost performance and other advantages.

### Applications:

Wall washers, Linear high bay light, Flood lighting, Wall lamp

## Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-75NL-E260*	90-305Vac	75W	180-260V	200V-260V	0.22-0.38A	10%	0.97	92%	90°C

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module;

# SS-75NL-E Series LED Driver

## “\*” Means Additional Function

“*”	AUX 12V (suffix:H)	0-10V/PWM/Resistor (suffix:B)	Adjust power (Single DIP)	Optical control	Remark
No Suffix					
B		✓			
BB		✓	✓		
BP		✓		✓	
BBP		✓	✓	✓	

## Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		277Vac	Ref. derating curve
AC Input Range	90Vac		305Vac	Ref. derating curve
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			0.9A	100Vac, Full load
Max Input Power			85W	100Vac, Full load
Max Inrush Current(120Vac)			70A	Cold start
Max Inrush Current(220Vac)			90A	Cold start
Max Inrush Current(277Vac)			120A	Cold start
Standby Power			3.5W	220Vac/50Hz, Dim-to-off
Power Factor	0.95	0.97		220Vac/50Hz, Full load
	0.90			100-277Vac/50Hz, 70%-100% load
THD		8%	10%	220Vac/50Hz, Full load
			20%	100-277Vac/50Hz, 70%-100% load

# SS-75NL-E Series LED Driver

## Output Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	180V		260V	Power derated @180-200V
Rated O/P Voltage	200V		260V	$P_o=V_o \cdot I_o=75W$ , Full load
Rated O/P Current	0.29A		0.38A	0.38A for 200V, 0.29A for 260V
Adj. O/P Current (AOC) Range	0.22A		0.38A	
No Load Voltage			310V	
Efficiency @120Vac	89.0%	90.0%		Output 260V/0.29A
Efficiency @220Vac	91.0%	92.0%		Output 260V/0.29A
Efficiency @277Vac	90.0%	92.0%		Output 260V/0.29A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			1.5S	120Vac, Full load
			1.0S	220Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-6%		+6%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	>Tc Typ., Current derating <Tc Min., Current recovery
Short Circuit Protection				Driver will not be damaged

# SS-75NL-E Series LED Driver

## Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
0-10V Dimming	Dim Vmax	0V		12V	DIM+ source current 100uA.
	Dim Range	10%Iomax		100%Ioset	Dimming prohibits reverse connection
	Rec.Dim Range	0V		10V	
PWM Dimming	PWM High	9.8V		10.2V	DIM+ source current 100uA.
	PWM Low	0V		0.3V	Dimming prohibits reverse connection
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming	Resistance	0Kohm		100Kohm	DIM+ source current 100uA.
	Dim Range	10%Iomax		100%Ioset	
Dim-to-Off	Dim off	0.6V	0.7V	0.8V	Afterglow
	Dim on	0.8V	0.9V	1.0V	
Lifetime(Tc≤85°C)		≥50,000 hours			
MTBF		200,150 hours			220Vac,Full load, Ta=25°C (MIL-HDBK-217F)
Tc		90°C			
Warranty		5 years			Tc: 85°C
Net Weight		355g			
Dimension		164mm*45mm*31mm			L x W x H

NOTE: All the parameters above are tested Ta 25°C and LED load, unless specified.

# SS-75NL-E Series LED Driver

## Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

## Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN IEC 55015:2019+A11:2020	
Radiation Emission	EN IEC 55015:2019+A11:2020	
Harmonic Current Emissions	IEC/EN 61000-3-2:2019+A1:2021	Class C
Surge	IEC/EN61000-4-5	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	DM: 6kV,CM: 6kV,Criterion B

# SS-75NL-E Series LED Driver

## Safety Test Items:


Safety Test Items	Technical Indicators		Remark
	UL Insulation Requirements	TUV Insulation Requirements	
Insulation Requirements	UL Insulation Requirements	TUV Insulation Requirements	
Input-Case	1600Vac	1500Vac	Basic insulation
Input-Dim	1600Vac	3000Vac	Reinforced insulation
Dim-Case	500Vac	250Vac	Basic insulation
Insulation Resistance	$\geq 10M\Omega$		Input-Dim, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$		25A/1min
Leakage Current	$\leq 0.75mA$		277Vac

### NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim -) when Hi-pot test.
3. During the HI-POT, the built-in GDT and the ground connection terminal wire shall be disconnected.

## Performance Curves:


### Input Inrush Current

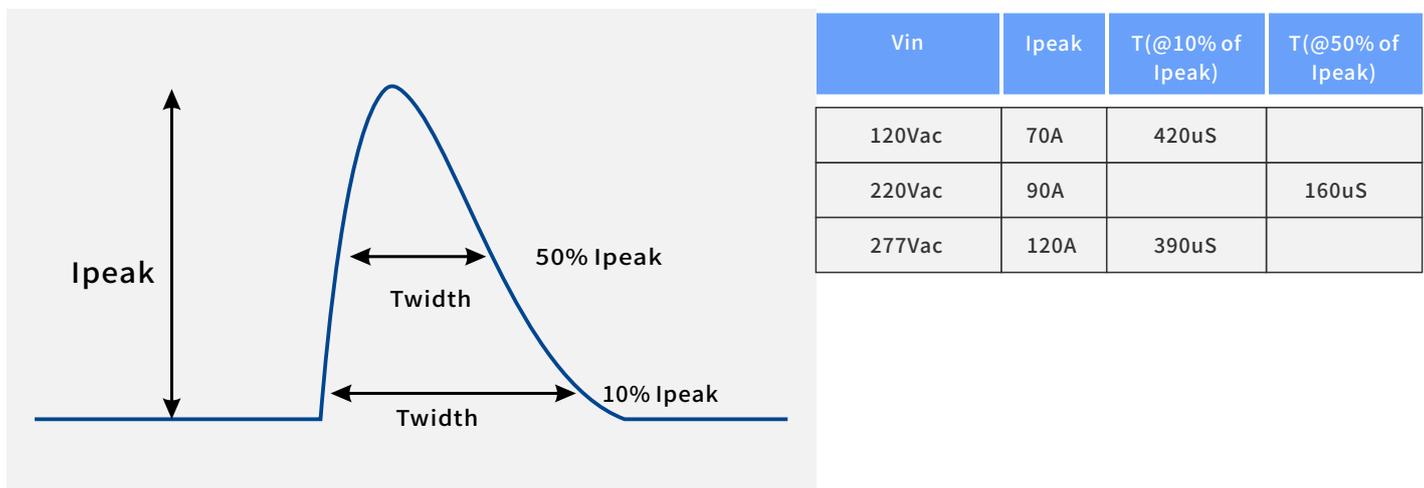

# SS-75NL-E Series LED Driver


## Performance Curves:

### Output Voltage Vs. Output Current(Dim/AOC Window)

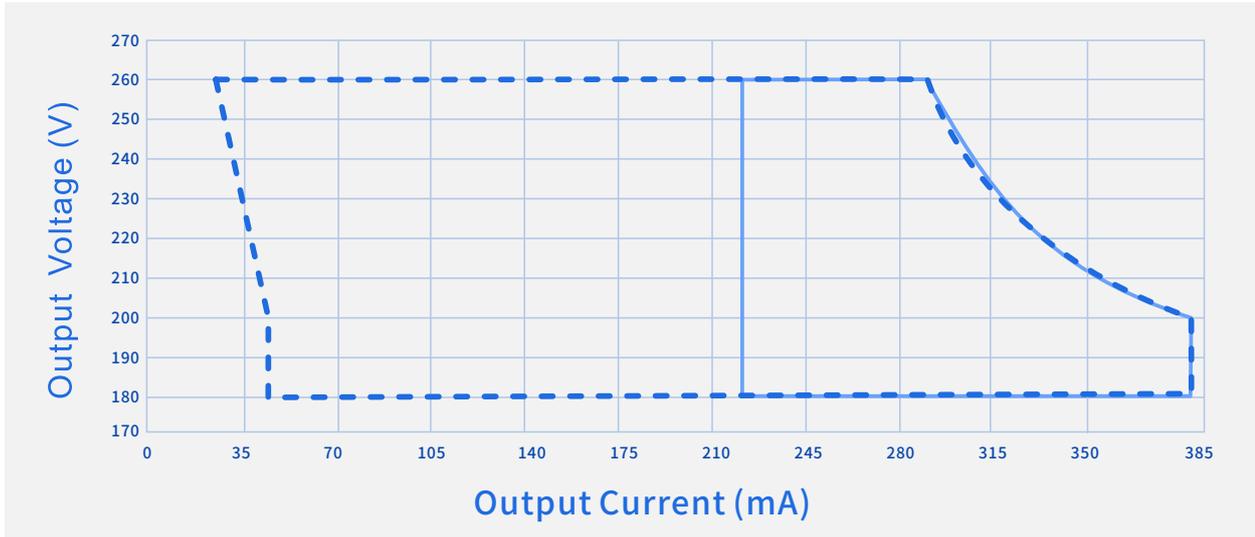

----- Dimming Window      ————— AOC Window

### Efficiency Vs. Output Voltage (Vin=120Vac)

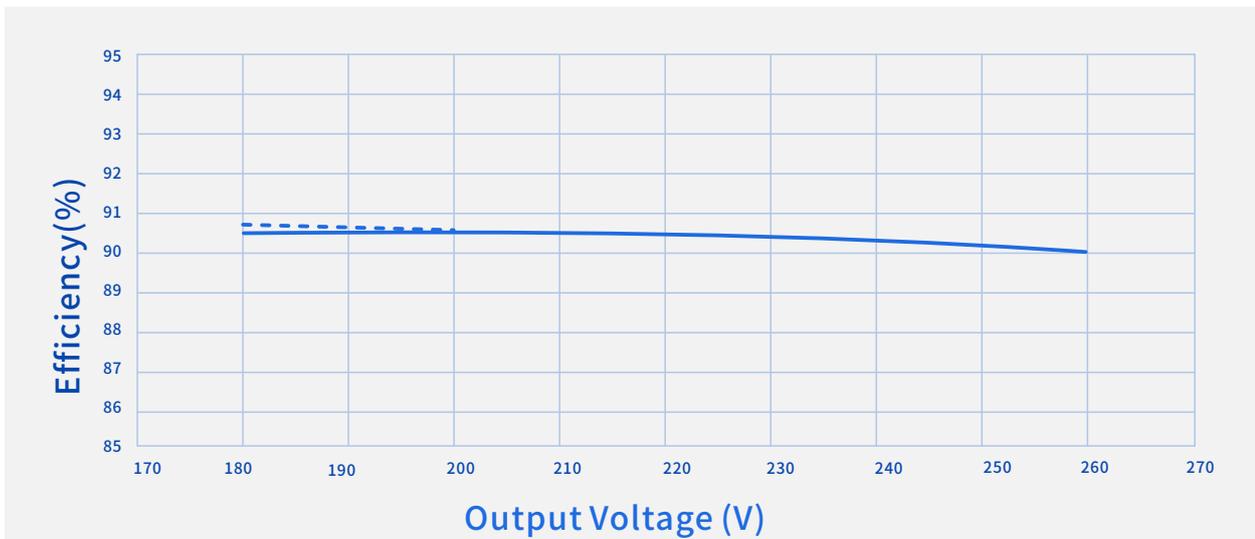


----- Io=380mA      ————— Io=290mA

# SS-75NL-E Series LED Driver

## Performance Curves:


### Efficiency Vs. Output Voltage ( $V_{in}=220V_{ac}$ )

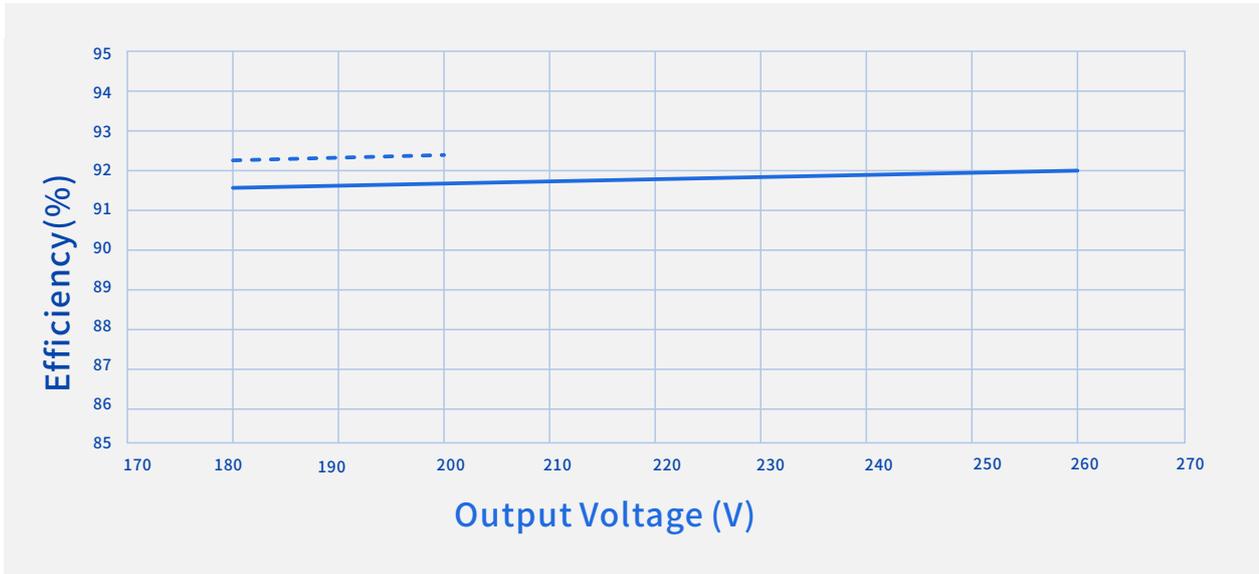

-----  $I_o=380mA$

—————  $I_o=290mA$

### Efficiency Vs. Output Voltage ( $V_{in}=277V_{ac}$ )

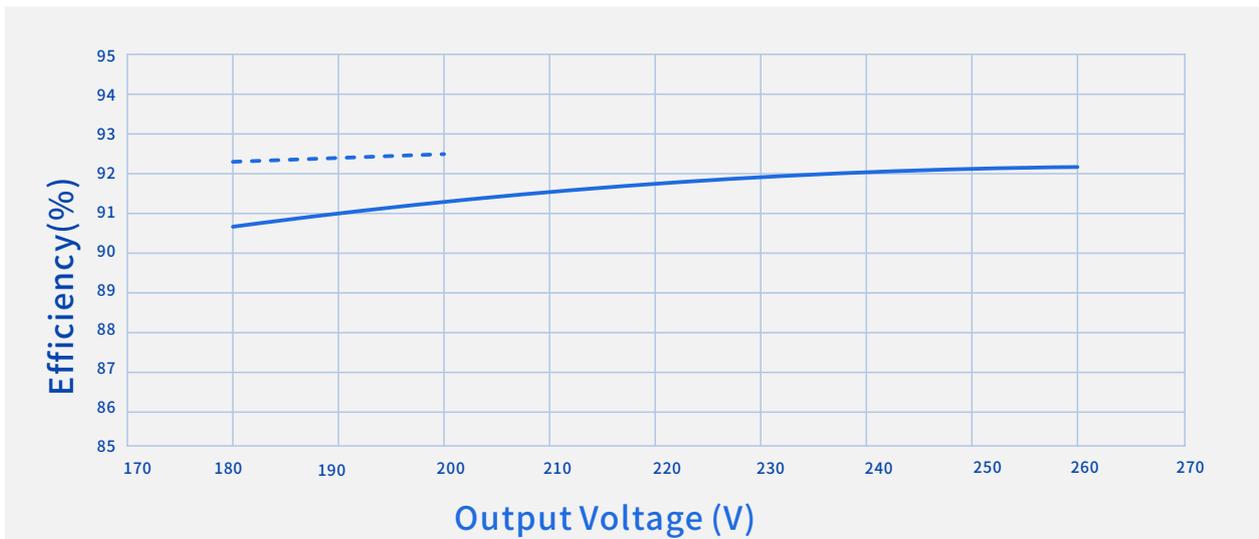


-----  $I_o=380mA$

—————  $I_o=290mA$

# SS-75NL-E Series LED Driver


## Performance Curves:

### Power Factor Vs. Output Power

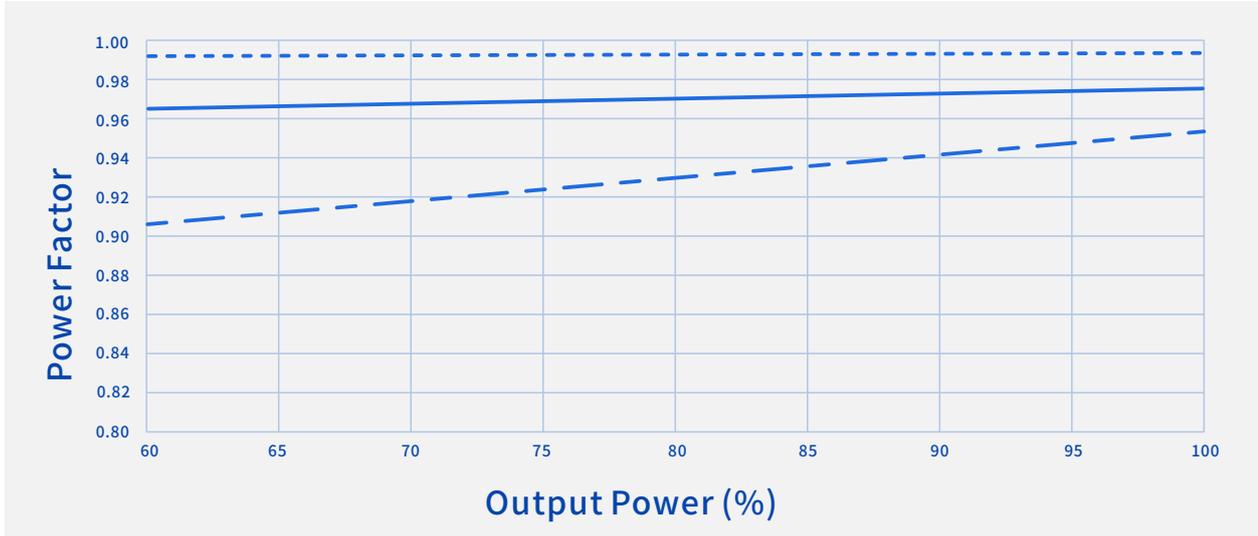

----- Vin=120Vac      \_\_\_\_\_ Vin=220Vac      - . - . Vin=277Vac

### THD Vs. Output Power

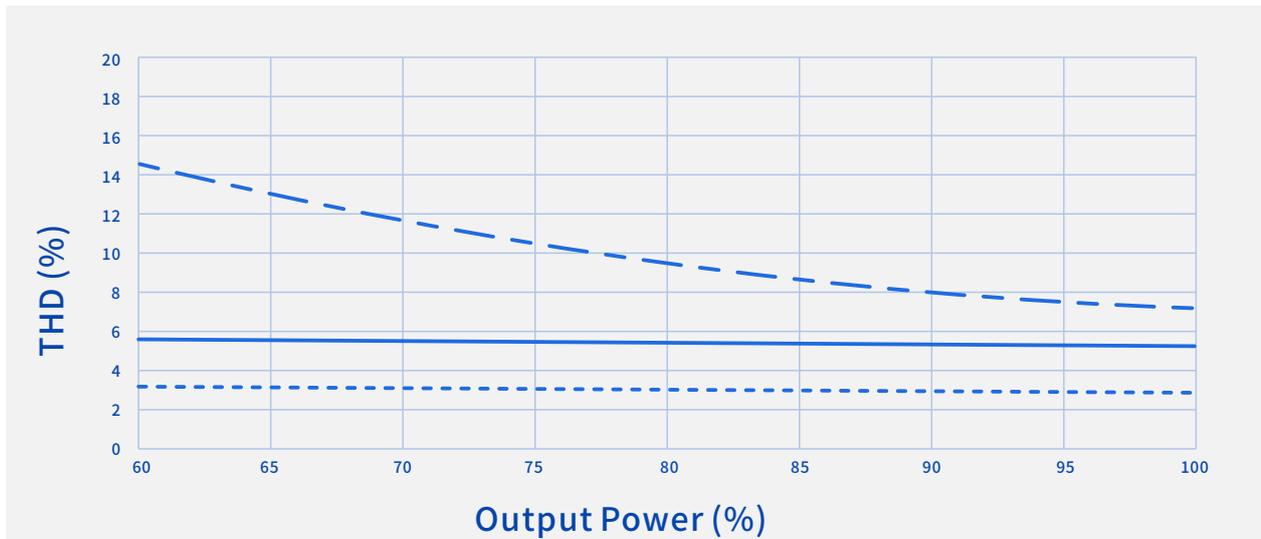


----- Vin=120Vac      \_\_\_\_\_ Vin=220Vac      - . - . Vin=277Vac


# SS-75NL-E Series LED Driver

## Performance Curves:

### Output Power Vs. Input Voltage

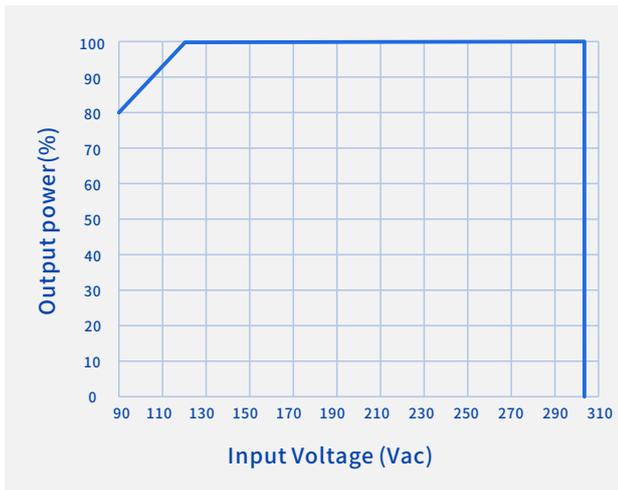


### Output Power Vs. Case Temperature

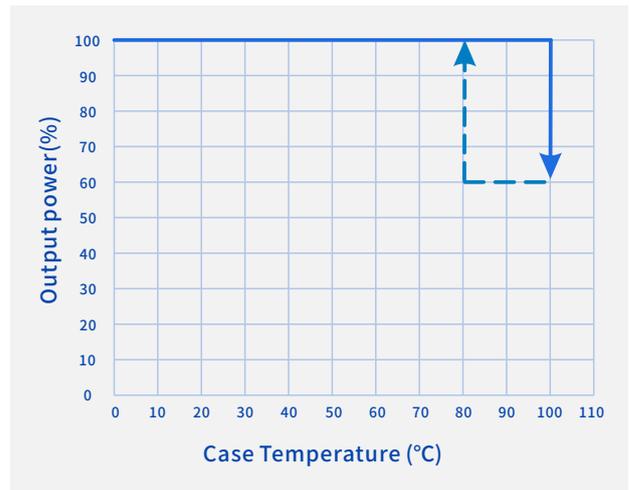

### Output Power Vs. Dimming




### Lifetime Vs. Case Temperature

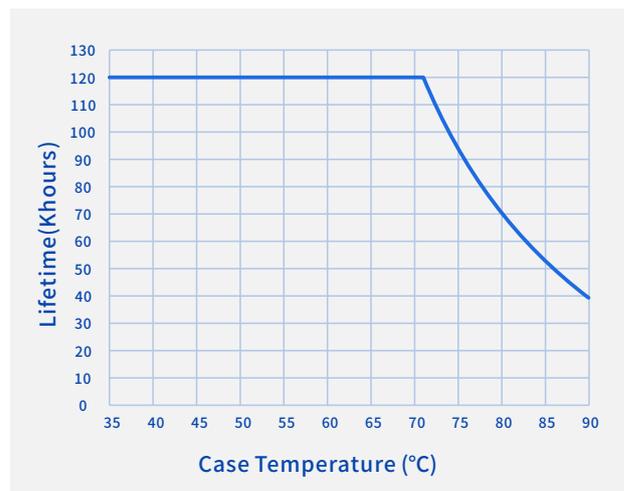

# SS-75NL-E Series LED Driver

## Mechanical Characteristics

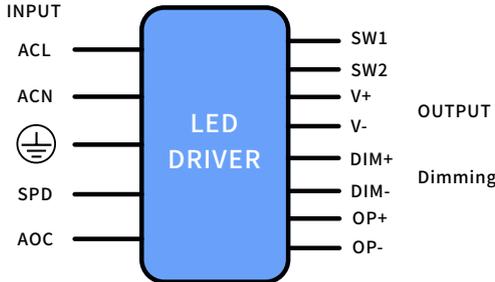

### AC Input Cable(Exposed Length $300 \pm 10\text{mm}$ ):

UL/EU model: 18AWG 105°C 600V O.D: 2.77mm,Black:ACL,White:ACN,Green:⊕

### SPD Input Cable With Terminal (Exposed Length $260 \pm 10\text{mm}$ ):

UL/EU model: 18AWG 105°C 600V O.D: 2.77mm,Green:SPD

### DC Output Cable(Exposed Length $300 \pm 10\text{mm}$ ):

UL/EU model: 18AWG 105°C 300V O.D: 1.95mm,Red:V+, Black:V-

### Resistance power regulating line with terminal Cable:

UL/EU model: 24AWG 150°C 300V O.D: 1.6mm,Orange: SW1,SW2

### Optical control line with terminal:

UL/EU model: 24AWG 150°C 300V O.D: 1.6mm,Red: OP+,Black: OP-


### DIM Cable(Exposed Length $220 \pm 10\text{mm}$ ):

UL/EU model: 22AWG 105°C 300V O.D: 1.52mm, Purple: DIM+, Pink: DIM-

Name Description	Standard Code	mm(In.)
Case Length	L3	148(5.83)
Case Width	W2	45(1.77)
Case Height	H	31(1.22)
Overall Length	L1	164(6.46)
Mounting Hole Length	L2	157.5(6.2)
Mounting Hole Width	W1	32(1.26)
TC Point Position	X	28(1.1)
TC Point Position	Y	24(0.94)

#### Note:

- Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.
- AC Input Cable,DC O/P Cable,DIM Cable:  
Tinned length of wire: $10 \pm 2\text{mm}$

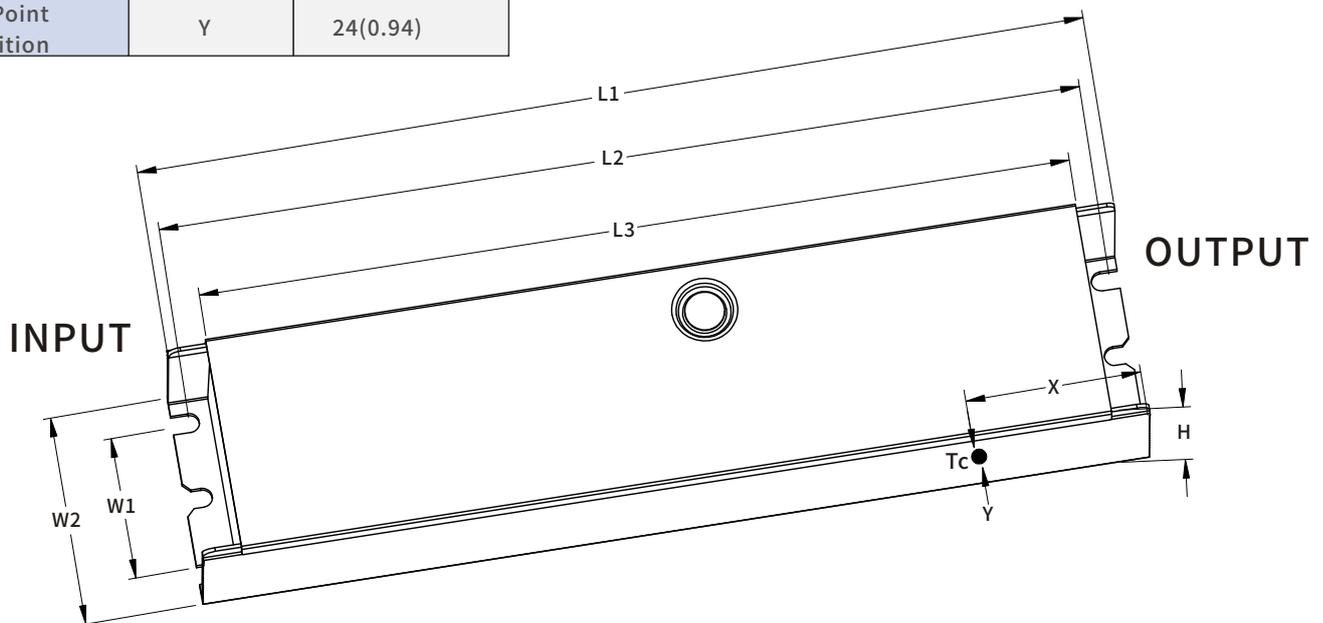

# SS-75NL-E Series LED Driver



## Assembly Tips

1. Highly recommended to seal the adjustable hole with silicon glue(#704 preferred) after adjusting the Driver's output current. Avoid permanent damage to adjust the potentiometer with suitable strength.
2. Dimming tinned connectors should be capped if not used to avoid dimming parts damage from external signals.
3. In order to meet the requirements of the power derating and the maximum ambient temperature of 50°C, an auxiliary heat sink must be added. It is recommended that the heat sink has a heat dissipation area of 380cm<sup>2</sup> and volume of 115cm<sup>3</sup>. Thermal grease should be applied between led driver and the auxiliary heat sink to ensure the bottom of housing is in close contact with the heat sink.
4. The surge protection of the LED drivers meets the requirements of CM 6kV/DM 6kV. There is SPD inside the LED drivers. During test HI-POT between the PE and the primary, disconnect the SPD PE wire, then after tested, lock the SPD PE wire to housing and ensure contact is good.
5. The trace routing on aluminum substrates is designed in compliance with creepage distance requirements specified by relevant certification regulations.
6. The creepage distance between LED+ and LED- on the aluminum substrate is designed in compliance with the relevant certification regulations.
7. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
8. It is recommended to design LED beads in parallel first and then in series.
9. The insulation level of LED light panels should meet the reliability design requirements.
10. For other precautions, please refer to the "LED Driver User Manual".
11. SOSEN reserves the right of final interpretation of the above parameters.

## Warning

Insufficient or compromised insulation voltage resistance in LED light panels may cause breakdown and short circuits to earth, resulting in damage to the luminaire and LED driver, and posing significant safety hazards. It is recommended to install a residual current device (RCD) during application.

## Package

- Outside carton dimension: L × W × H = 445mm × 300mm × 153mm;
- 27PCS/Carton;
- Net weight/Piece: 0.355kg; Gross weight/Carton: 10.21kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873—83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

## Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2022/08/26	
V01	Add SPD Input Cable	2022/10/26	
V02	Add Page Number	2023/02/01	
V03	Update Certification	2023/03/24	
V04	Update Assembly Tips	2023/05/15	
V05	Update Additional Function	2023/09/11	
V06	Update the number of packages	2026/01/12	