



# SOSEN LED Driver, Your Smart Choice

## Specifications

### SS-100CA Series LED Driver

Model: SS-100CA-XX\*

Description: 100W LED Driver

Rev.: V10

Release Date: 2023-02-01

# SS-100CA Series LED Driver

**SOSEN**  
LED DRIVER



LED DRIVER

CA Series



## Features:

- ▣ Efficiency up to 90%
- ▣ Dimming: DALI-2,0-10V,PWM,Resistor
- ▣ Dim-to-Off
- ▣ Surge protection: CM: 6kV, DM: 6kV
- ▣ Auxiliary Power : 12V/0.3A
- ▣ Standby Power <0.5W
- ▣ IP65
- ▣ Type HL, suitable for hazardous locations
- ▣ Protections: SCP/OTP/OPP
- ▣ Warranty: 5 years



**CE IP65 Class P**

## Description:

SS-100CA series are constant current waterproof LED Driver in round shape with 90-305Vac and high efficiency, supporting multiple dimming models, dim-to-off,auxiliary power

### Applications:

High bay lighting, Plant lighting,

## Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Working Voltage	Iout	Iout (DALI-2)	THD (Typ.)	PF (Typ.)	Eff. (Typ.)	Max.Tc
SS-100CA-56*	90-305Vac	100.8W	28-56V	33-56V	1.5-3.0A	1.67-3.0A	8%	0.98	90%	90°C

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module.

# SS-100CA Series LED Driver

## “\*” Means Additional Function

“*”	DALI (suffix:D)	AUX 12V (suffix:H)	Timing (suffix:T)	0-10V/PWM /Resistor (suffix:B)	Remark
BH		✓		✓	
DH	✓	✓			

## Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		277Vac	
AC Input Range	90Vac		305Vac	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			1.5A	100Vac, Full load
Max Input Power			125W	100Vac, Full load
Max Inrush Current(120Vac)			30A	Cold start
Max Inrush Current(220Vac)			60A	Cold start
Max Inrush Current(277Vac)			75A	Cold start
Standby Power			0.5W	220Vac/50Hz, Dim to off or Enable STB
Power Factor	0.95	0.98		220Vac/50Hz, Full load
	0.90			100-277Vac/50Hz, 70-100% load
THD		8%	10%	220Vac/50Hz, Full load
			20%	100-277Vac/50Hz, 70-100% load

# SS-100CA Series LED Driver

## Output Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	28V		56V	Power derated @28-33V
Rated O/P Voltage	33V		56V	$P_o = V_o \cdot I_o = 100.8W$ , Full load
Rated O/P Current	1.8A		3.0A	3.0A for 33V, 1.8A for 56V
Adj. O/P Current (AOC) Range	1.5A		3.0A	
	1.67A		3.0A	For DALI-2
No Load Voltage			60V	
Efficiency @120Vac	86.0%	87.5%		Output 45V/2.2A
Efficiency @220Vac	88.0%	89.5%		Output 45V/2.2A
Efficiency @277Vac	89.0%	90.5%		Output 45V/2.2A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac, Full load
			0.5S	220Vac, Full load
			0.7S	230Vac, For DALI-2
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	>Tc typ., Current Derating <Tc min., Current recovery
Short Circuit Protection			10W	Driver not be damaged, In constant current mode
			0.5W	Driver will not be damaged, Shut down for DALI-2

# SS-100CA Series LED Driver

## Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
AUX Power (Optional)	O/P Voltage	10.5V	12V	12.5V	
	O/P Current			300mA	Operate max 15min at 400mA
0-10V Dimming (Optional)	Dim Vmax	0V		12V	DIM+ source current 110uA.
	Dim Range	10%Iomax		100%Ioset	Dimming prohibits reverse connection
	Rec.Dim Range	0V		10V	
PWM Dimming (Optional)	PWM High	9.8V		10.2V	DIM+ source current 110uA.
	PWM Low	0V		0.3V	Dimming prohibits reverse connection
	Frequency	1KHz		2KHz	
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	
	Dim Range	10%Iomax		100%Ioset	DIM+ source current 110uA.
Dim to Off (Optional)	Dim off	0.7V	0.8V	0.9V	When DIM- and Vaux- are shared with single wire output, the dimming off point and dimming on point are tested under no load of the auxiliary power.
	Dim on	0.8V	0.9V	1.0V	
DALI Dimming Level		1-170(10%)		254(100%)	Logarithmic dimming curve
DALI Dimming(Optional)		Meet DALI-2			
Lifetime(Tc≤75°C)		62,000 hours			80% load
MTBF		201,000 hours			220Vac, Full load, Ta=25°C (MIL-HDBK-217F)
IP Grade		IP65			
Tc		90°C			
Warranty		5 years			Tc : 75°C
Net Weight		1200g			
Dimension		Φ132mm*71mm			D x H

NOTE: All the parameters above are tested Ta 25°C and LED load, unless specified.

# SS-100CA Series LED Driver

## Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

## Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Radiation Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN 61000-4-5;ANSI/C82.77-5-2017	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	DM: 6kV,CM: 6kV,Criterion B

# SS-100CA Series LED Driver

## Safety Test Items:


Safety Test Items	Technical Indicators			Remark
	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Output	1600Vac	3000Vac	3750Vac	Reinforced insulation
Input-Case	1600Vac	1500Vac	1875Vac	Basic insulation
Input-Dim	1600Vac	3000Vac	3750Vac	Reinforced insulation
Output-Dim	1600Vac	1000Vac	1000Vac	Basic insulation
Output-Case	500Vac	1000Vac	1000Vac	Basic insulation
Dim-Case	500Vac	250Vac	500Vac	Basic insulation
Insulation Resistance	≥10MΩ			Input-Output, Test voltage: 500Vdc
Ground Resistance	≤0.1Ω			25A/1min
Leakage Current	≤0.75mA			277Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+ and Vaux- and STB) when Hi-pot test.
3. The CCC withstand voltage test needs to disconnect the built-in lightning protection tube. According to the IEC 60598-1:14 standard section 10.2, the "built-in lightning protection tube" can be marked on the nameplate to disconnect the discharge tube on testing.

## Performance Curves:

### Input Inrush Current

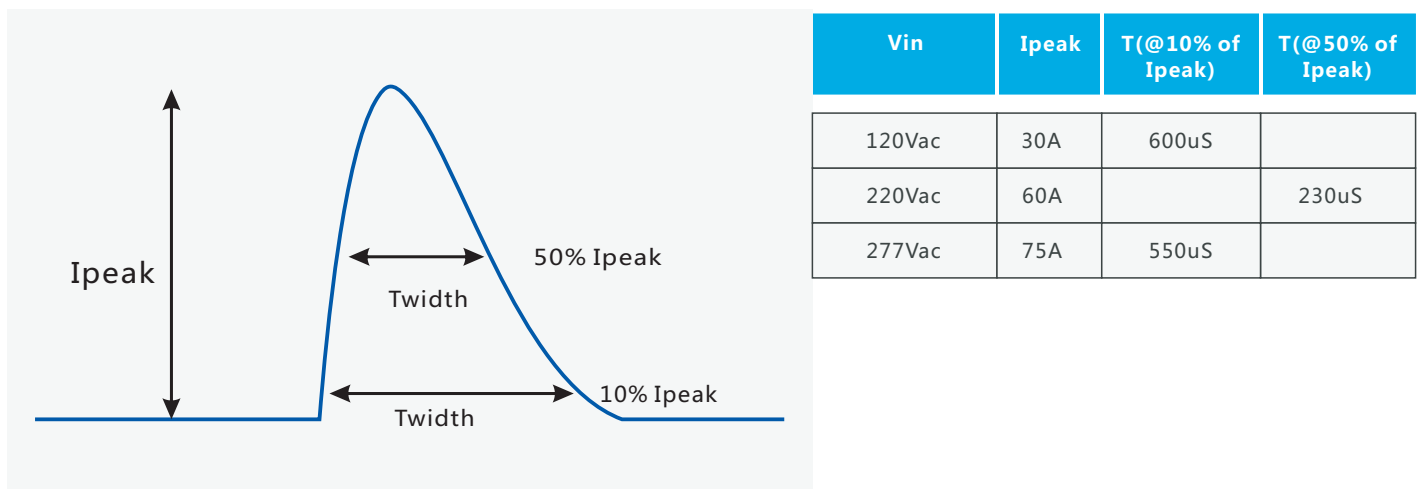


6/13

# SS-100CA Series LED Driver


## Performance Curves:

### Output Voltage Vs. Output Current(Dim/AOC Window)

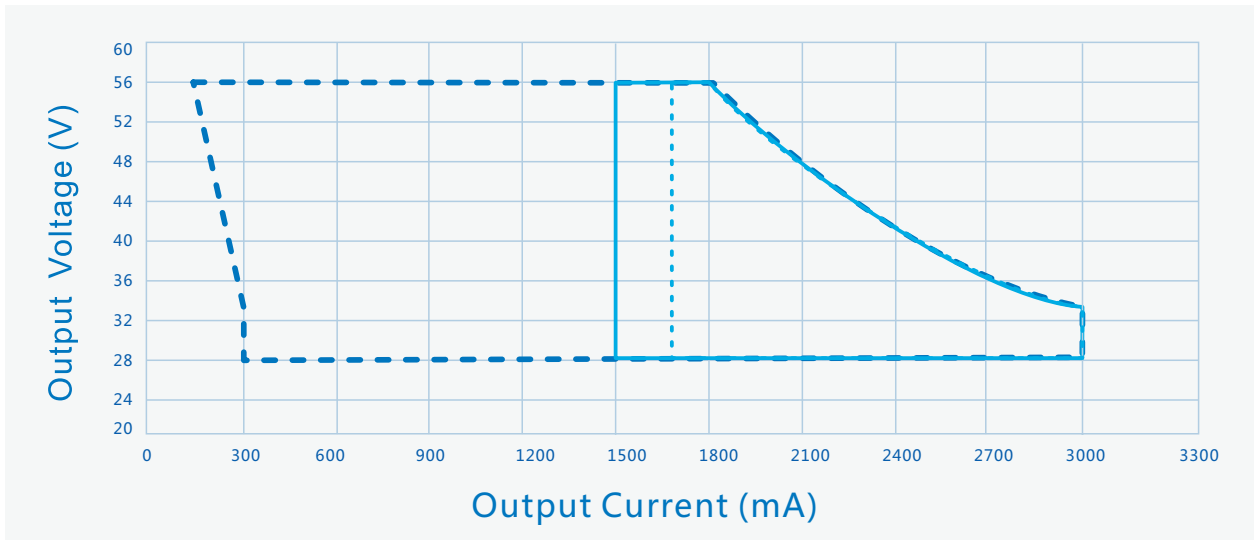

----- Dimming Window      ——— AOC Window      ..... AOC Window For DALI-2

### Efficiency Vs. Output Voltage (Vin=120Vac)

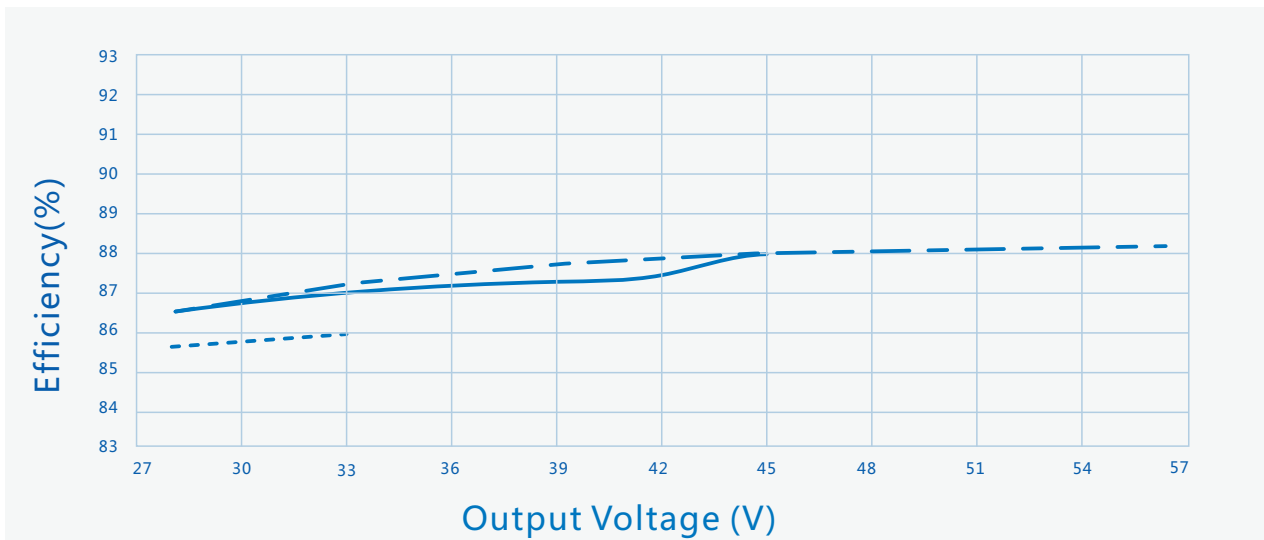


----- Io=3000mA      ——— Io=2200mA      - - - Io=1800mA



# SS-100CA Series LED Driver


## Performance Curves:

Efficiency Vs. Output Voltage ( $V_{in}=220V_{ac}$ )

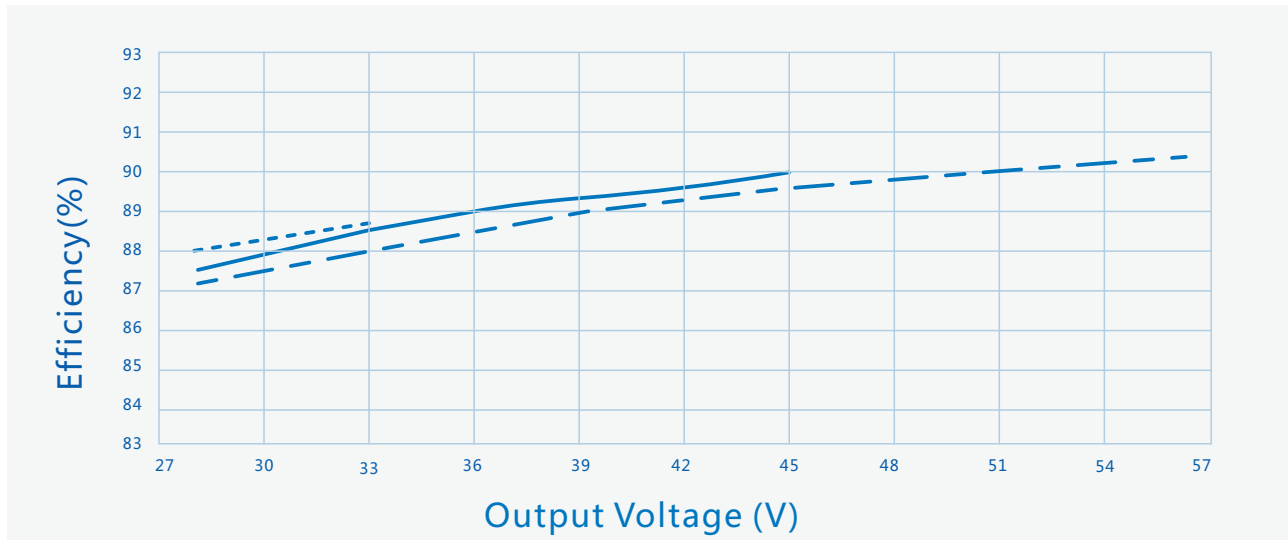

-----  $I_o=3000mA$       —————  $I_o=2200mA$       - - - -  $I_o=1800mA$

Efficiency Vs. Output Voltage ( $V_{in}=277V_{ac}$ )

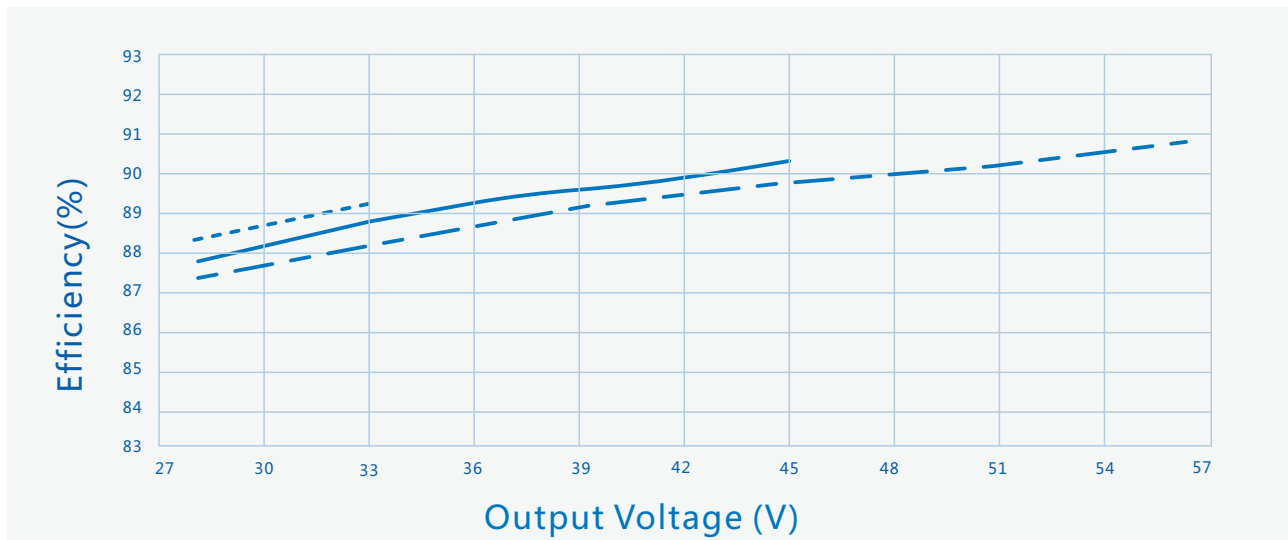


-----  $I_o=3000mA$       —————  $I_o=2200mA$       - - - -  $I_o=1800mA$

# SS-100CA Series LED Driver


## Performance Curves:

### Power Factor Vs. Output Power

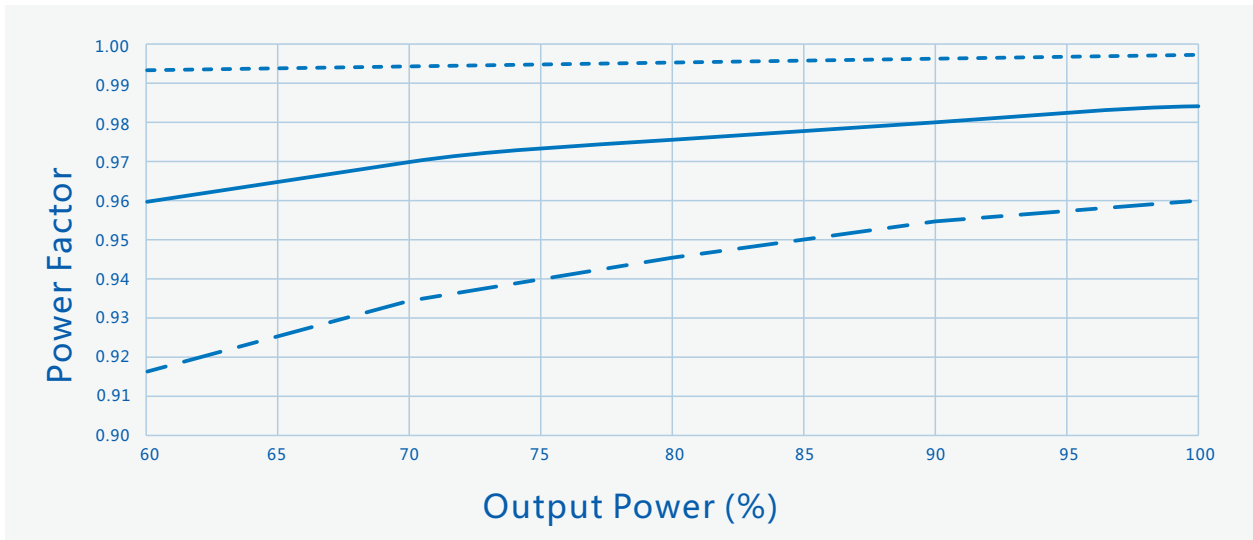

----- Vin=120Vac    ——— Vin=220Vac    - - - Vin=277Vac

### THD Vs. Output Power

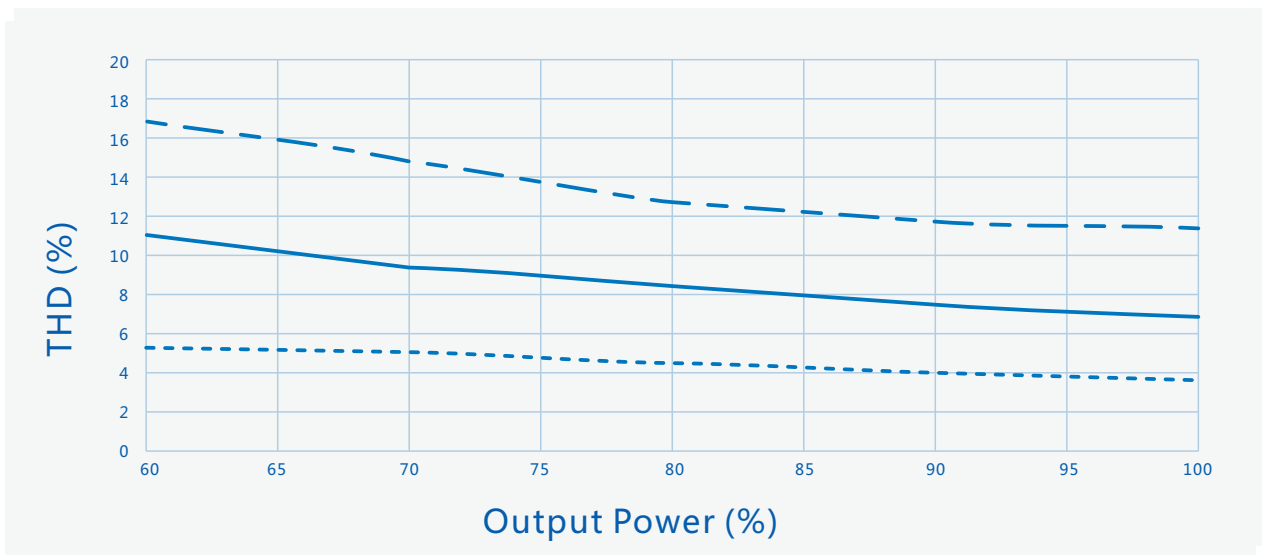


----- Vin=120Vac    ——— Vin=220Vac    - - - Vin=277Vac


# SS-100CA Series LED Driver

## Performance Curves:


### Output Power Vs. Input Voltage (Ta Max.55°C)

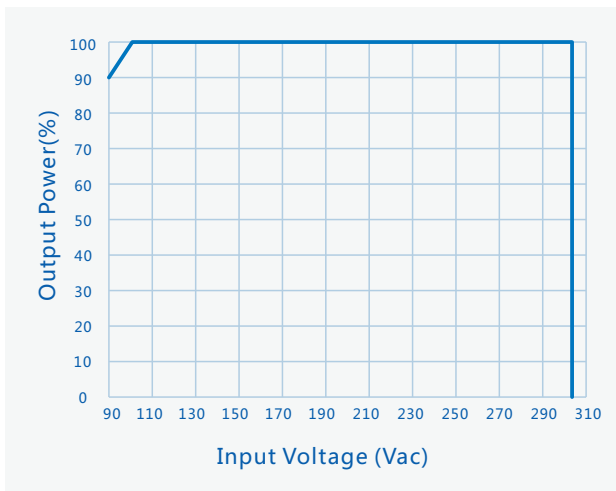


### Output Power Vs. Case Temperature

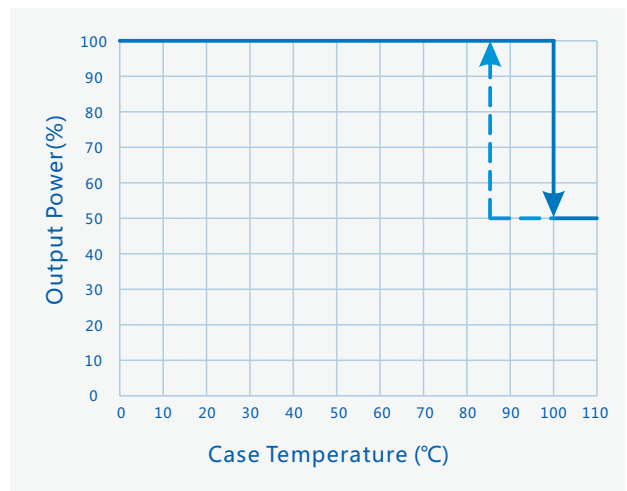

### Output Power Vs. Dimming

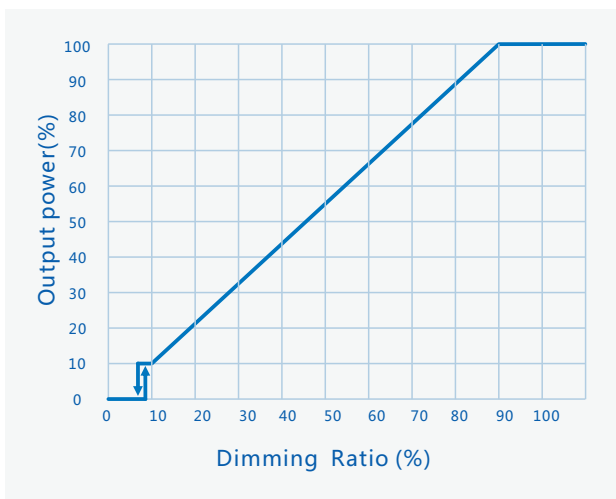


### Lifetime Vs. Case Temperature

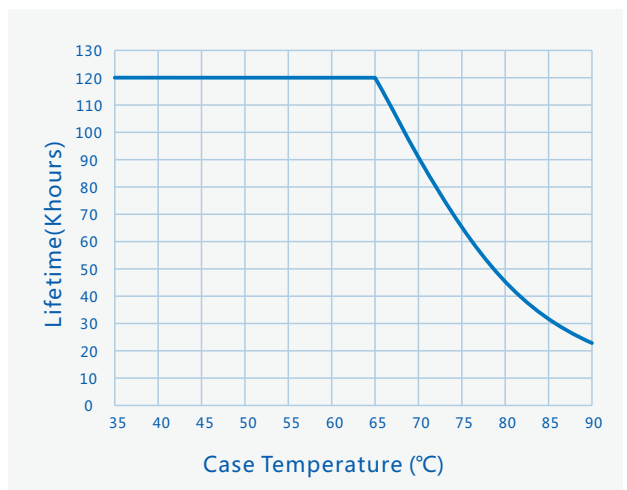

# SS-100CA Series LED Driver

## Mechanical Characteristics

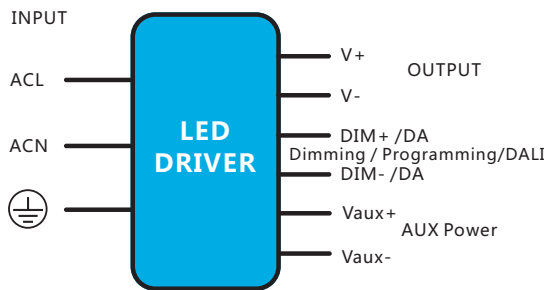

### AC Input Cable(Exposed Length 300±10mm):

UL model: SJTW,3\*18AWG,O.D: 7.8mm,Black:L,White:N,Green:⊕  
 EU model: H05RN-F,3\*1.0mm<sup>2</sup>, O.D:7.3mm,Brown:L, Blue:N, Yellow/Green:⊕  
 Global model: SJOW,3\*17AWG ,O.D:8.0mm,Brown:L, Blue:N, Yellow/Green:⊕

### DC Output Cable(Exposed Length 300±10mm):

UL model: SJTW,2\*18AWG,O.D: 7.3mm,Red:V+, Black:V-  
 EU model: H05RN-F,2\*1.0mm<sup>2</sup>, O.D:7.0mm, Brown:V+, Blue:V-  
 Global model: SJOW,2\*17AWG, O.D:7.7mm, Brown:V+, Blue:V-



### DIM /AUX Cable(Exposed Length 220±10mm):

UL/EU/Global model: UL 21996, 3\*22AWG , O.D: 4.9mm, Purple : DIM+,  
 Pink: DIM-/Vaux-, Black/White:Vaux+

### DALI/AUX Cable(Exposed Length 220±10mm):

UL/EU/Global model: UL 21996, 4\*22AWG , O.D: 5.6mm, Purple : DA,  
 Pink:DA, Black/White:Vaux+,Blue/White:Vaux-

Name Description	Standard Code	mm(In.)
PG Size	A	M12*1.5
Mounting Screw Diameter	4-B	Φ7.0(0.28)
Case Diameter	D	Φ132.0(5.2)
Height	H	71.5(2.82)
Ring Hole	Z	M10*1.5(Depth 18mm) G1/2(Depth 17mm)
Ring Fixed Hole	R	M4*0.7
Mount Size	W	113.0(4.45)
Mount Size	W1	113.0(4.45)
TC Point Position	X	33(1.3)
TC Point Position	Y	8(0.31)

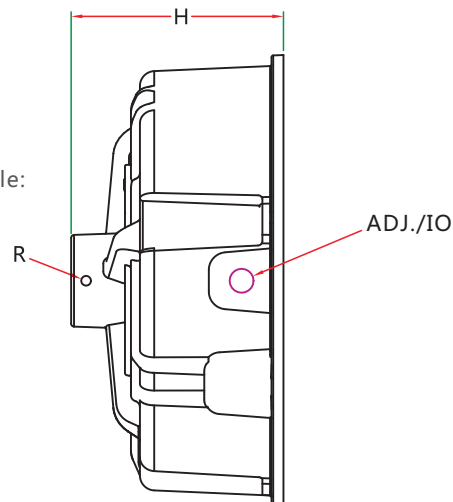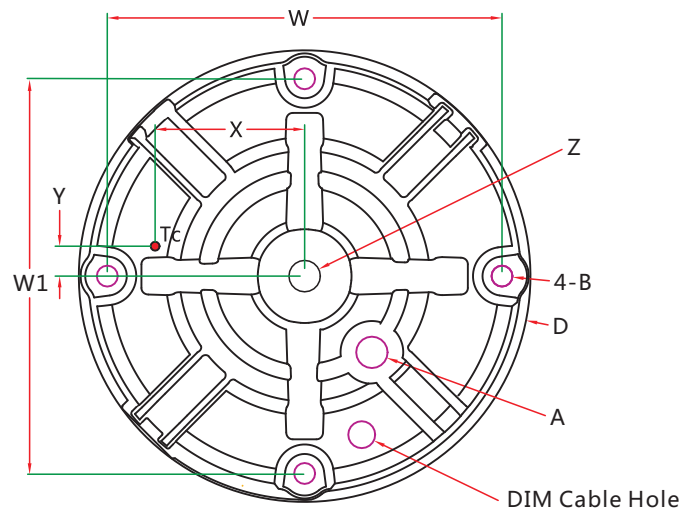

#### Note :

- 1, Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.
- 2, AC Input Cable, DC O/P Cable, DIM/AUX Power/Programming Cable: Peeled length of cable: 43±5mm, Tinned length of wire: 10±2mm

# SS-100CA Series LED Driver



## Assembly Tips

1. Highly recommended to seal the adjustable hole with silicon glue(#704 preferred) after adjusting the Driver' s output current. Avoid permanent damage to adjust the potentiometer with suitable strength.
2. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.

## Package

- Outside carton dimension: L×W×H =495mm×385mm×162mm;
- 9PCS/Carton;
- Net weight/Piece: 1.2kg;Gross weight/Carton: 12.3kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873 - 83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

## Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2019/09/17	
V01	Update CCC Insulation Requirements	2019/10/29	
V02	Update Structure Dimension Characteristics	2020/04/07	
V03	Update Cable Length	2020/04/27	
V04	Update Dim to Off Point	2021/01/19	
V05	Update Tinned Length Of Wire	2021/07/02	
V06	Update DIM Cable Color	2021/09/02	
V07	Increase Note About Dim To Off	2021/11/11	
V08	Increase The Content Of DALI-2	2022/01/18	
V09	Delete Timing	2022/11/28	
V10	Add Page Number	2023/02/01	