



# SOSEN LED Driver, Your Smart Choice

## Specifications

### SS-720VP Series LED Driver

Model: SS-720VP-XX

Description: 720W LED Driver

Rev.: V01

Release Date: 2021-01-04


# SS-720VP Series LED Driver

**SOSEN**  
LED DRIVER



**LED DRIVER**

**VP Series**

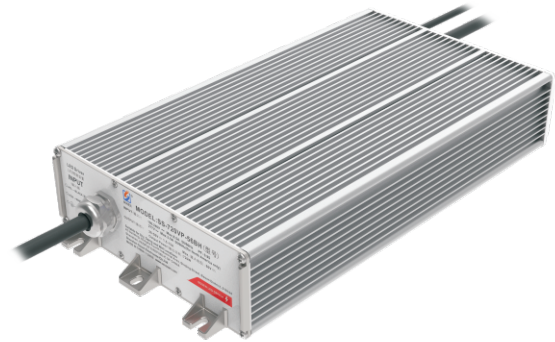

## Features:

- Efficiency up to 95.6%
- Dimming: DALI-2, 0-10V,PWM,Resistor,Timing
- Dim-to-Off
- Surge Protection: CM: 10kV, DM: 6kV
- AUX Power : 12V/0.3A
- Constant Lumen, Life Warning
- External NTC to Protect LED Module
- Standby Power<0.5W
- IP67
- Communication Function With PC
- Type HL, suitable for hazardous locations
- Protections: SCP/OTP/OVP
- Warranty: 8 years



**IP67 Class P**



## Description:

SS-720VP series are 720W constant current LED Driver with wide O/P voltage range and adjustable O/P current by program. LED luminaries manufactures can easily to design luminaries and reduce cost.

### Applications:

High bay lighting, Stadium lighting, Square lighting, Plant lighting, Fish lighting

## Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vout Range	Iout	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-720VP-56*	90-305Vac	720W	28-56V	48-56V	1.5-15A	10%	0.95	95%	90°C

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module.

# SS-720VP Series LED Driver

## “\*” Means Additional Function

“*”	DALI (suffix:D)	AUX 12V (suffix:H)	NTC (suffix:N)	Timing	0-10V/PWM Dim /Resistor (suffix:B)	Remark
BH		✓		✓	✓	
BHN		✓	✓	✓	✓	
DH	✓	✓				
DHN	✓	✓	✓			

## Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		120Vac	Ta : 40°C
	120Vac		200Vac	Ta : 50°C
	200Vac		277Vac	Ta : 55°C
AC Input Range	90 Vac		305Vac	90Vac, 70% load
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			8.5A	100Vac, full load
Max Input Power			850W	100Vac, full load
Max Input Current(120Vac)			38A	Cold Start
Max Input Current(220Vac)			78A	Cold Start
Max Input Current(277Vac)			105A	Cold Start
Standby Power			0.5W	220Vac/50Hz, Dim to off or Enable STB
Power Factor	0.95	0.97		220Vac/50Hz, full load
	0.90			100-277Vac/50Hz, 70-100% load
THD		8%	10%	220Vac/50Hz, full load
			20%	100-277Vac/50Hz, 70-100% load

# SS-720VP Series LED Driver

## O/P Characteristics(SS-720VP-56\*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	28V		56V	Power Derated @28-48V
Rated O/P Voltage	48V		56V	$P_o=V_o*I_o=720W$ , full load
Rated O/P Current	12.8A		15A	15A for 48V,12.8A for 56V
Adj. O/P Current (AOC)Range	1.5A		15A	By Programming
No Load Voltage			60V	
Efficiency @120Vac	90.5%	92.0%		O/P 56V/12.8A
Efficiency @220Vac	93.5%	95.0%		O/P 56V/12.8A
Efficiency @277Vac	94.0%	95.3%		O/P 56V/12.8A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac,Full load
			0.5S	220Vac,Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	>Tc typ., Current Derating <Tc min., Operates Recovery
Short Circuit Protection			10W	Driver not be damaged, Hiccup mode

# SS-720VP Series LED Driver

## Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
AUX Power	O/P Voltage	11.6V	12V	12.4V	Peak Power:6W
	O/P Current	0mA	300mA	400mA	
0-10V Dimming (Optional)	Dim Vcc	0V		12V	Negative dimming by programming
	Dim Range	10%Ioset		100%Ioset	DIM+ source current 110uA .
	Rec.Dim Range	0V		10V	Dimming prohibits reverse connection.
PWM Dimming (Optional)	PWM High	9.8V		10.2V	Negative dimming by programming
	PWM Low	0V		0.3V	DIM+ source current 110uA .
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0K		100K	Negative dimming by programming
	Dim Range	10%		100%	DIM+ source current 110uA .
Dim to Off	Dim off	7%	8%	9%	
	Dim on	8%	9%	10%	
Timing Curve(Optional)		By programming			Set by program
DALI Dimming(Optional)		Meet DALI-2			
Constant Lumen(Optional)		By programming			Set by program
Life Warning(Optional)		By programming			Set by program
Life Time(Tc≤71°C)		71,000 hours			80% Load
MTBF		198,000 hours			220Vac,full load, Ta=25°C (MIL-HDBK-217F)
IP Grade		IP67			
Tc		90°C			
Warranty		8 years			Tc : 71°C
Net Weight		3750g			
Dimension		282mm*144mm*49.5mm 11.10in*5.67in*1.95in			L x W x H

NOTE: 1,All the parameters above are tested Ta 25°C and LED load, unless specified.

2. When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value: 91KΩ/N.

# SS-720VP Series LED Driver

## Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

## Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017		
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Radiation Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN 61000-4-5	DM: 6kV,CM: 10kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	DM: 6kV,CM: 6kV,Criterion B

# SS-720VP Series LED Driver

## Safety Test Items:


Safety Test Items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-O/P	1600Vac	3000Vac	3750Vac	Reinforced insulation
Input-Case	1600Vac	1500Vac	1875Vac	Basic insulation
Input-Dim	1600Vac	3000Vac	3750Vac	Reinforced insulation
O/P-Dim	1600Vac	1000Vac	1000Vac	Basic insulation
O/P-Case	1600Vac	1000Vac	1000Vac	Basic insulation
Dim-Case	500Vac	250Vac	500Vac	Basic insulation
Insulation Resistance	$\geq 10M\Omega$			Input-O/P, Test voltage:500Vdc
Ground Resistance	$\leq 0.1\Omega$			25A/1min
Leakage Current	$\leq 0.75mA$			277Vac

### NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V- and NTC+ and NTC-), (Dim+ and Dim - and Vaux+ and Vaux- and STB) when Hi-pot test.
3. The CCC withstand voltage test needs to disconnect the built-in lightning protection tube. According to the IEC 60598-1:14 standard section 10.2, the "built-in lightning protection tube" can be marked on the nameplate to disconnect the discharge tube on testing.

## Performance Curves:


### Input Inrush Current

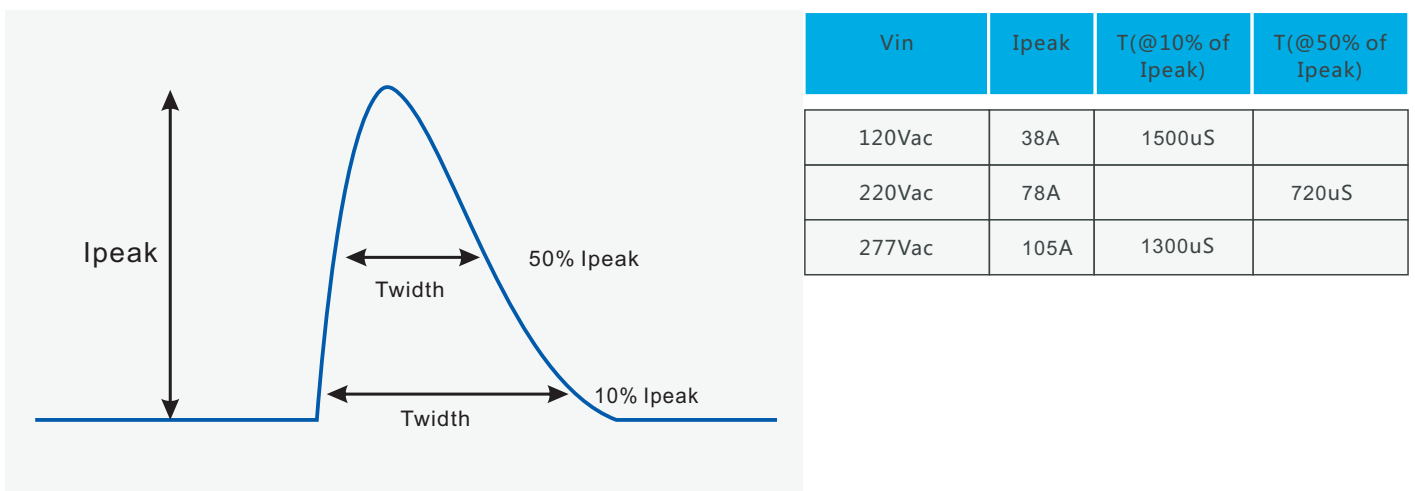

# SS-720VP Series LED Driver

## Performance Curves:


O/P Voltage Vs. O/P Current(DIM/AOC Window)

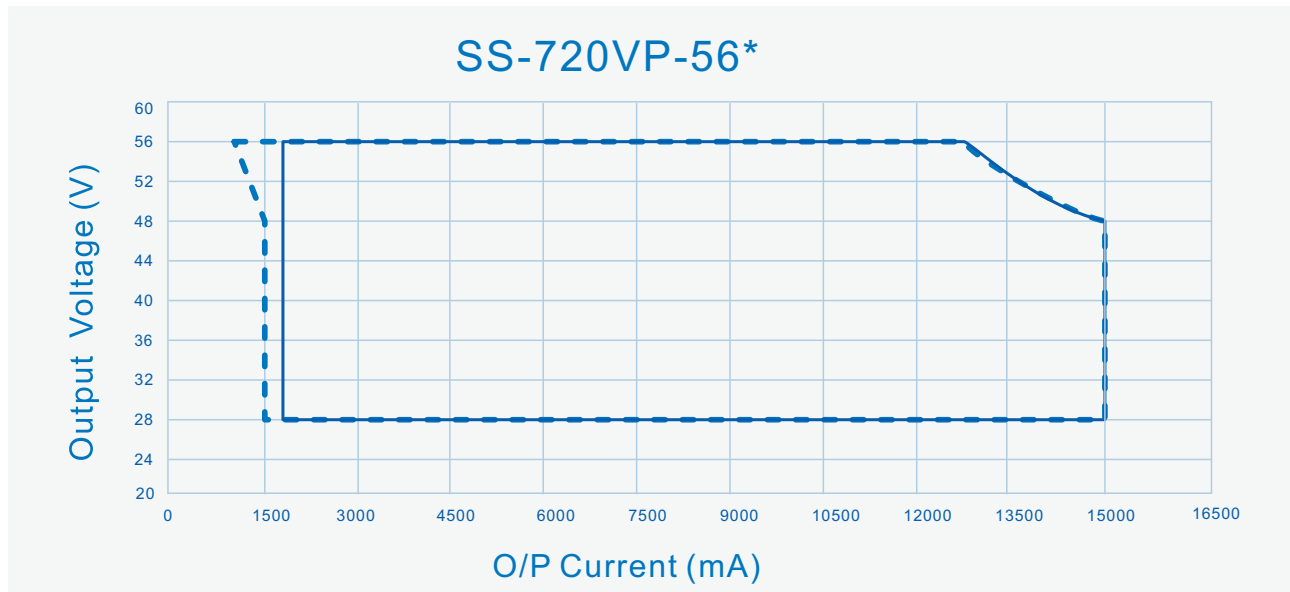

-- DIM Window

— AOC Window

Efficiency Vs. O/P Voltage (Vin=120Vac)

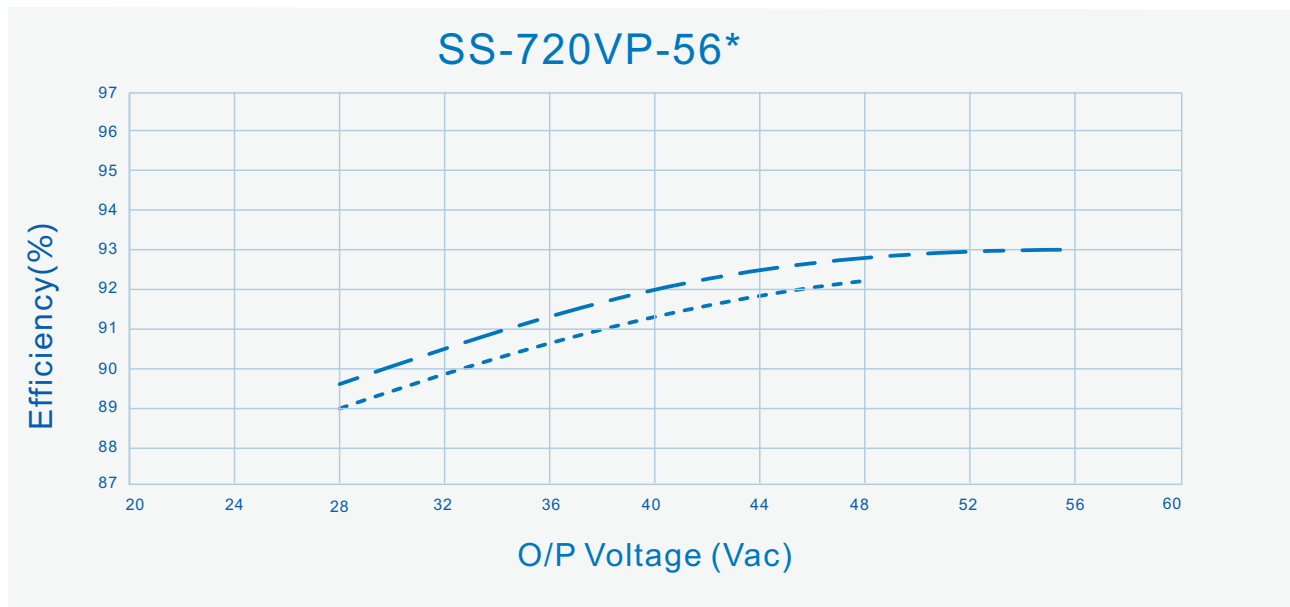


----- Io=15000mA

- - - - Io=12800mA


# SS-720VP Series LED Driver

## Performance Curves:

Efficiency Vs. O/P Voltage ( $V_{in}=220V_{ac}$ )

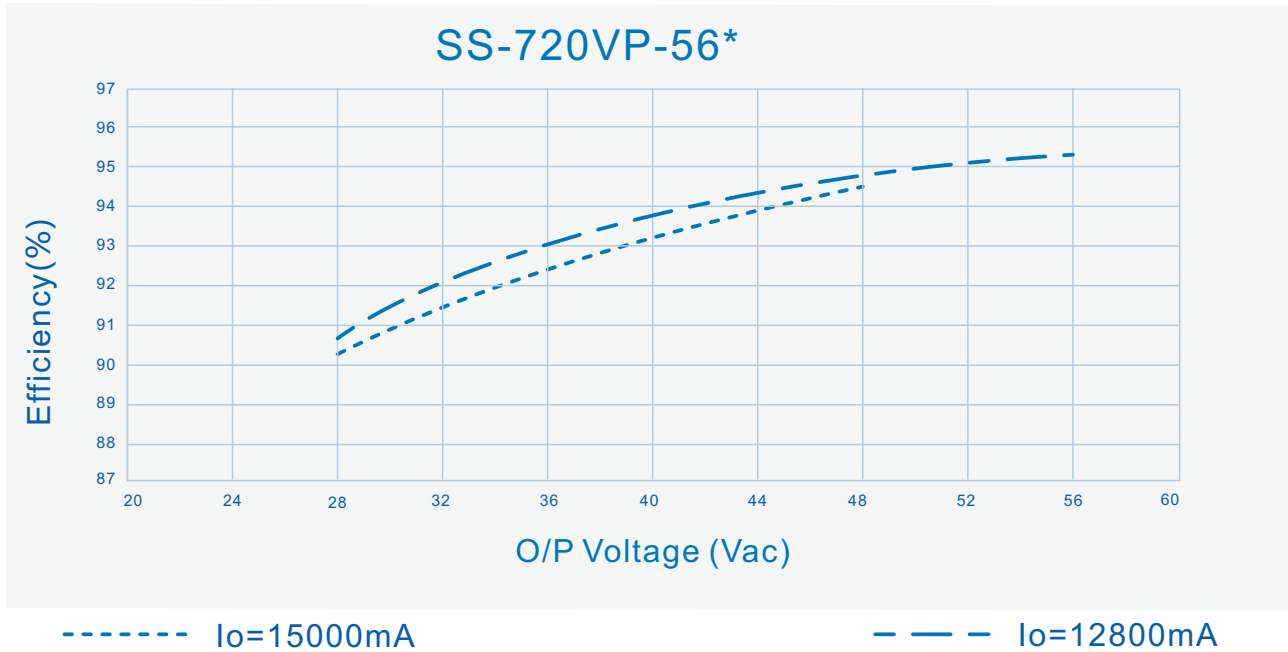


Efficiency Vs. O/P Voltage ( $V_{in}=277V_{ac}$ )

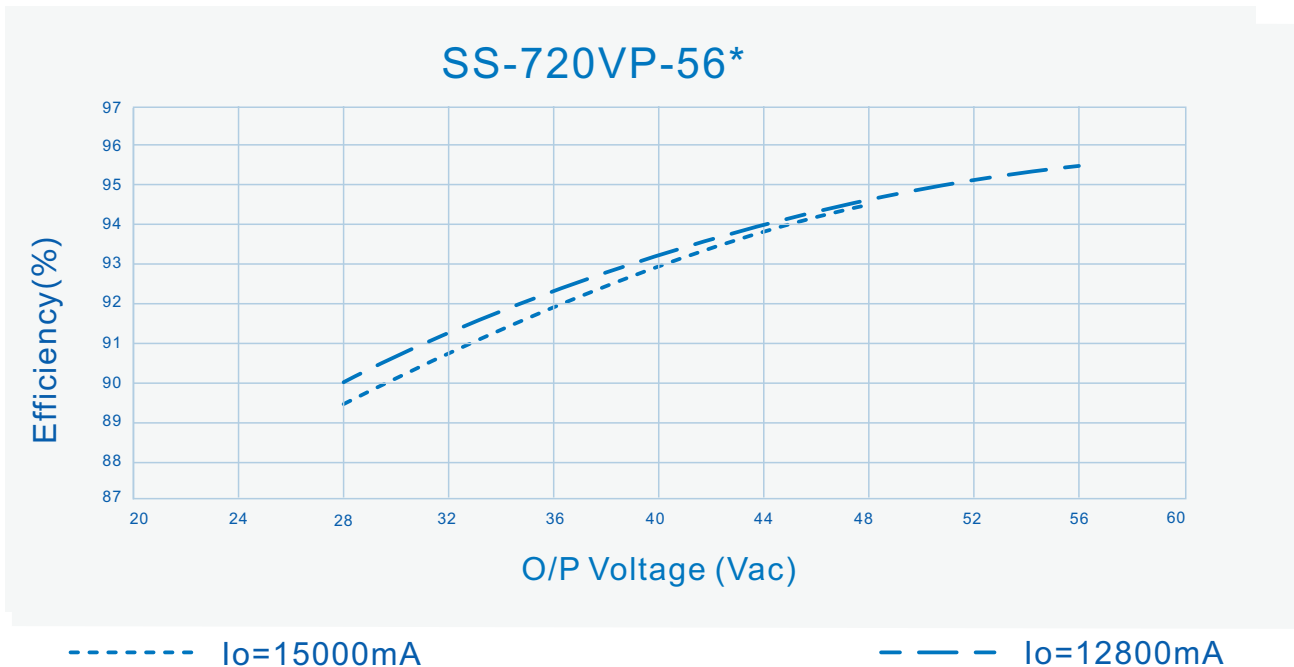

# SS-720VP Series LED Driver


## Performance Curves:

Power Factor Vs. O/P Power

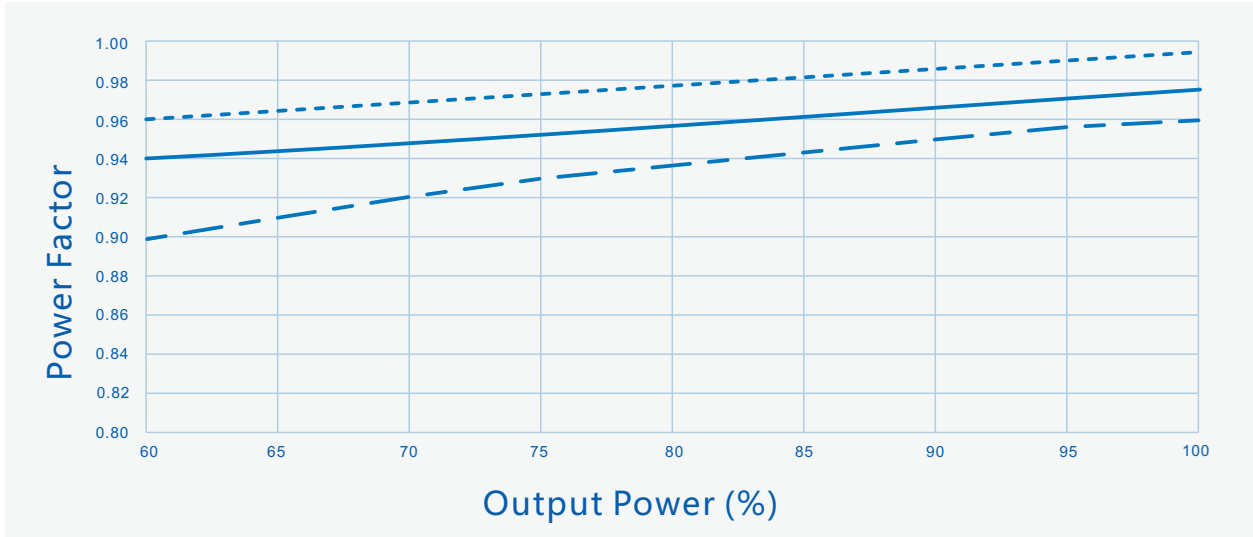

----- Vin=120Vac      ——— Vin=220Vac      - - - Vin=277Vac

THD Vs. O/P Power

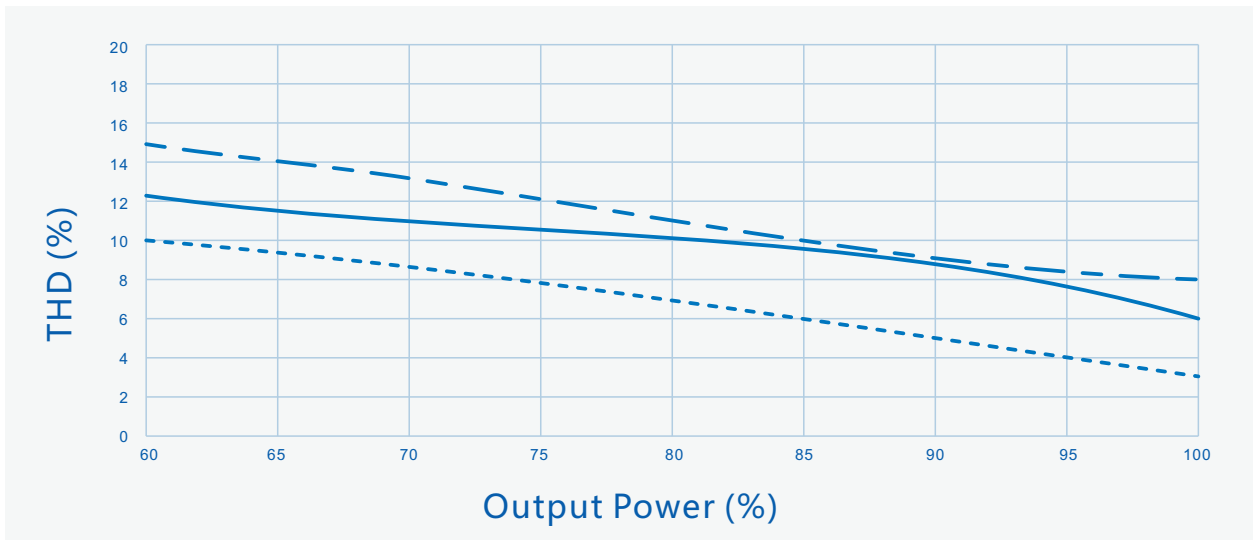


----- Vin=120Vac      ——— Vin=220Vac      - - - Vin=277Vac


# SS-720VP Series LED Driver

## Performance Curves:


### O/P Power Vs. Input Voltage

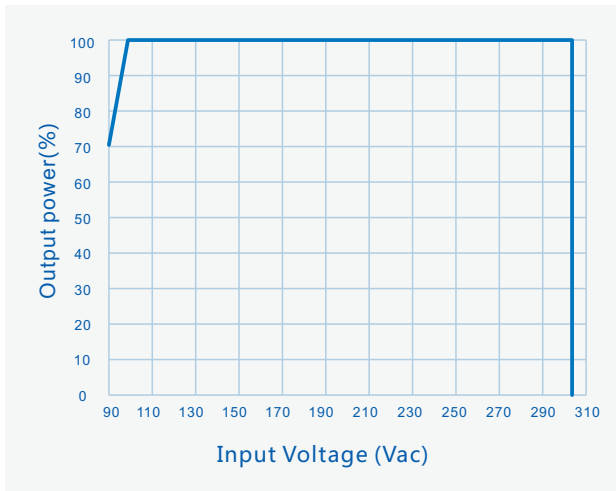


### O/P Power Vs. Case Temperature

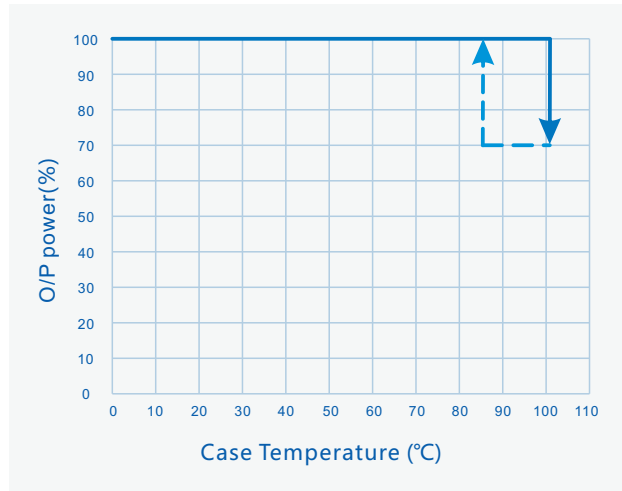

### O/P Power Vs. Dimming

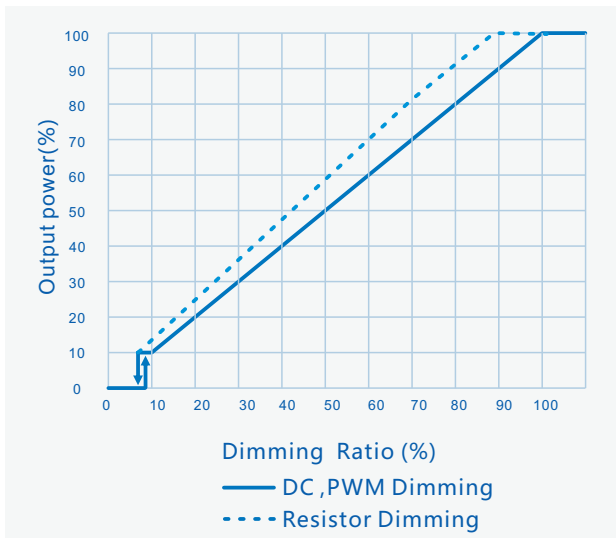

### Life Time Vs. Case Temperature

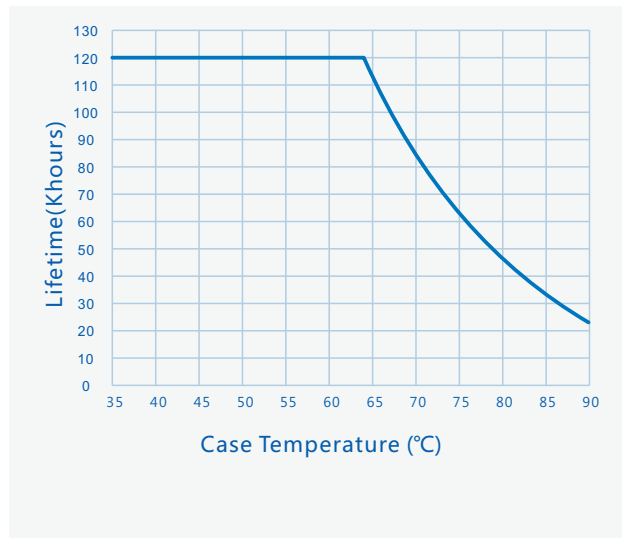


# SS-720VP Series LED Driver

## Constant Lumen O/P

Constant Lumen O/P are design to maintain fixture's stable O/P lumen by increasing Driver's O/P current within Driver's lifetime to counteract LED lumen degradation.

## Programming Connection Diagram :

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.  
Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.  
Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

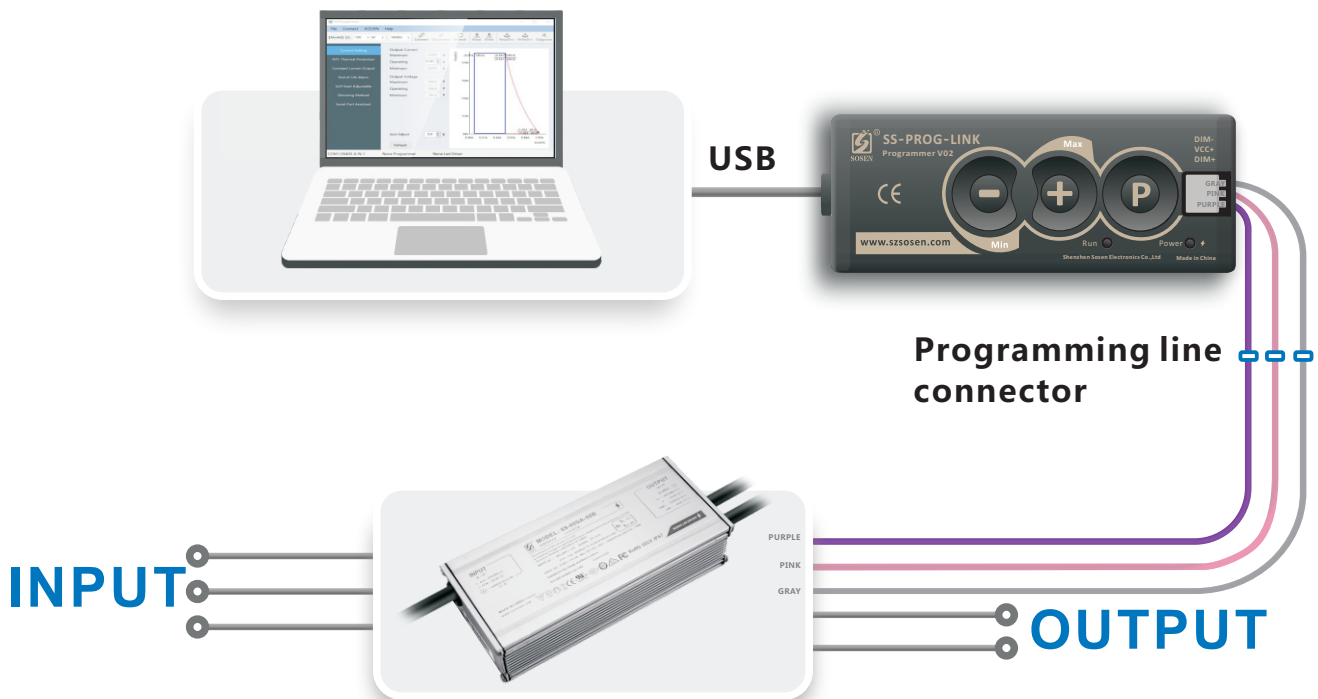


### Note:

Programming could be completed by off-line mode either without turn on the Driver nor without PC, other than the traditional on-line mode.

# SS-720VP Series LED Driver

## Mechanical Characteristics

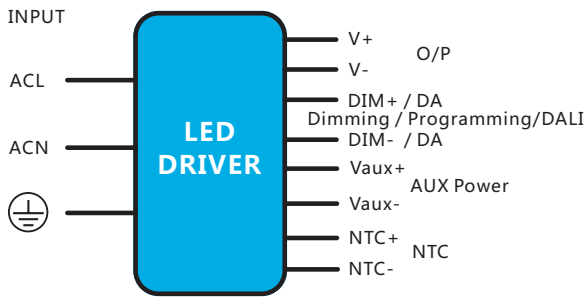

### AC Input Cable (Exposed Length 450±10mm):

Global model: SJOW, 3\*17AWG, O.D: 8.0mm, Brown: L, Blue: N, Yellow/Green: ⊕  
UL model: SJTW, 3\*16AWG, O.D: 9.0mm, Black: L, White: N, Green: ⊕

### DC O/P Cable (Exposed Length 250±10mm):

SS-720VP-56\*:  
Global model: SJOW, 2\*14AWG, O.D: 8.8mm, Brown: V+ , Blue: V-  
UL model: SJTW, 2\*14AWG, O.D: 9.0mm, Red: V+ , Black: V-

### DIM/AUX Power/Programming Cable (Exposed Length 220±10mm):

UL model: 21996, 4\*22AWG , O.D: 5.6mm , Purple : DIM+ , Gray: DIM- ,  
Pink: Vaux+ , Black/White: Vaux-

### NTC Cable (Exposed Length 300±10mm):

UL model: 21996, 2\*22AWG , O.D: 4.7mm, Blue: NTC+ , White: NTC-

Name Description	Standard Code	mm(In.)
Assembly Length	L1	288(11.34)
Overall Length	L2	282(11.10)
Mounting Hole Length	L3	266.7(10.5)
Case Length	L4	261.2(10.28)
Case Height	H	49.5(1.95)

Note :  
1, Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.  
2, AC Input Cable, DC O/P Cable, DIM/AUX Power/Programming Cable:  
Peeled length of cable: 43±5mm,  
Tinned length of wire: 6±1mm

Name Description	Standard Code	mm(In.)
Case Width	W1	144(5.67)
Mounting Hole Width	W2	97(3.82)
Mounting Hole Width	W3	48.5(1.91)
TC Point Position	X	65(2.56)
TC Point Position	Y	64(2.52)



# SS-720VP Series LED Driver



## Assembly Tips

1. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.

## Package

- Outside carton dimension: L×W×H =446mm×430mm×160mm;
- 4PCS/Carton;
- Net weight/Piece: 3.75kg;Gross weight/Carton: 16kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873 - 83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

## Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2020/08/01	
V01	Update Certification	2021/01/04	

